


After switching on with Q1, the system will be started by the Buttons S1-S12!

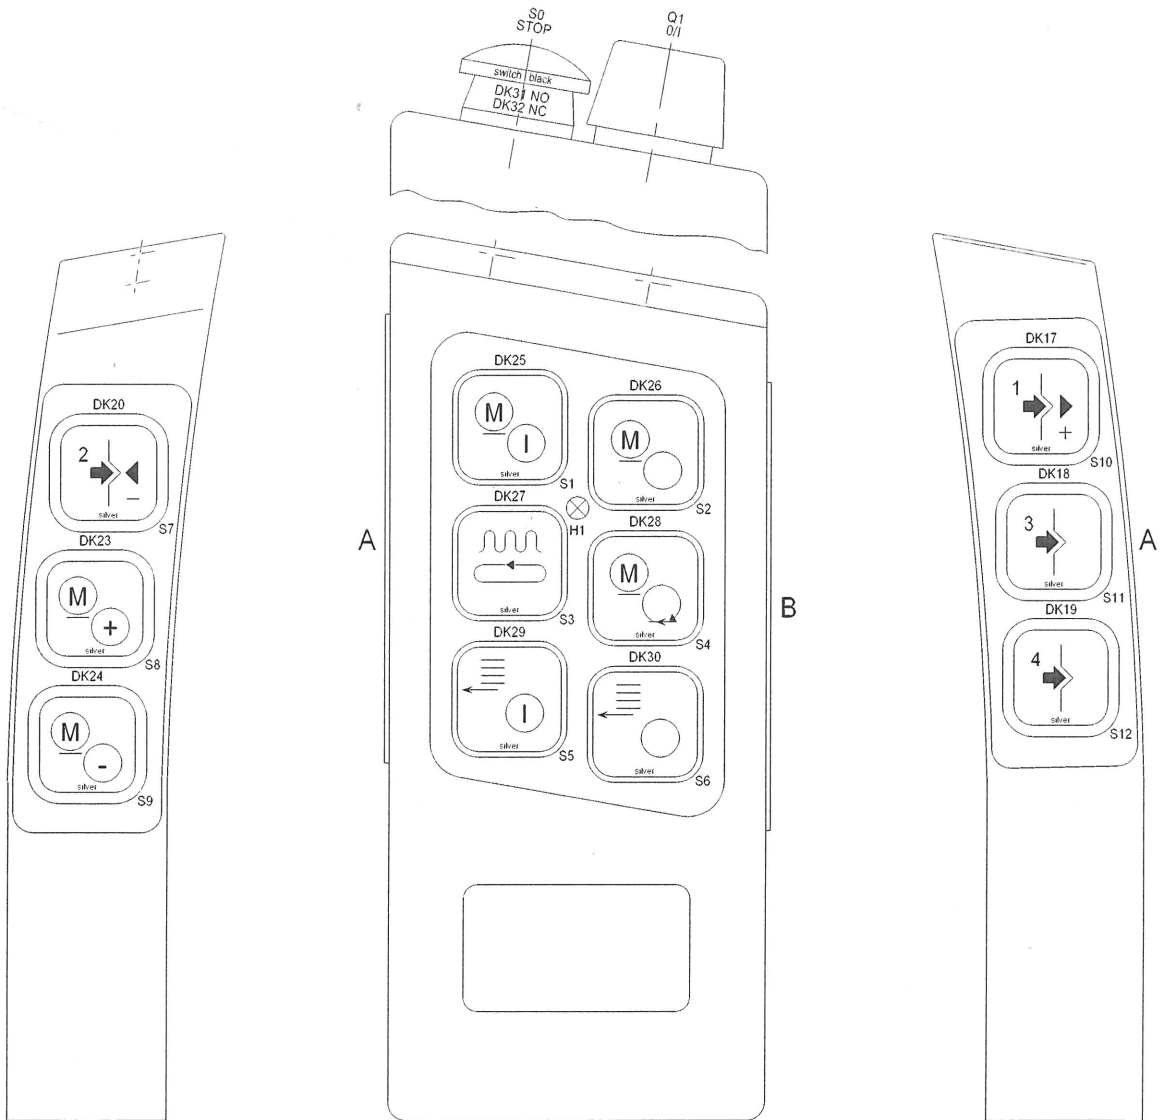

Jumper Setting
Key Board S8,S9

	open	closed
3V	<input type="checkbox"/>	<input checked="" type="checkbox"/>
5V	<input checked="" type="checkbox"/>	<input type="checkbox"/>

ERGO 5.0-coder jumper setting

		OPEN	CLOSE
J1	Baud rate	2400 <input type="checkbox"/>	4800 <input checked="" type="checkbox"/>
J2	Battery low detection	Normal <input type="checkbox"/>	Advanced <input checked="" type="checkbox"/>
J3	Telegram Form	Digital <input type="checkbox"/>	Analog <input checked="" type="checkbox"/>
J4	Timeout 10min	Disabled <input type="checkbox"/>	Enabled <input checked="" type="checkbox"/>
J5	DK25&DK26	No Interlocking <input type="checkbox"/>	Interlocking <input checked="" type="checkbox"/>
J6	Switch 2-2nd step	DK21 <input type="checkbox"/>	DK17 <input checked="" type="checkbox"/>
J7	DK27&DK28	No Interlocking <input type="checkbox"/>	Interlocking <input checked="" type="checkbox"/>
J8	Switch 4-2nd step	DK22 <input type="checkbox"/>	DK18 <input checked="" type="checkbox"/>
J9	DK29&DK30	No Interlocking <input type="checkbox"/>	Interlocking <input checked="" type="checkbox"/>
J10	DK20-21	Separated <input checked="" type="checkbox"/>	Tied Together <input type="checkbox"/>
J13	Start	DK1 <input type="checkbox"/>	Any button <input checked="" type="checkbox"/>
J14	Configuration	#1 <input type="checkbox"/>	#2 <input checked="" type="checkbox"/>
J11	Telegram	Not Inverted <input checked="" type="checkbox"/>	Inverting <input type="checkbox"/>
J12	Cable Telegram	Not Inverted <input checked="" type="checkbox"/>	Inverting <input type="checkbox"/>

CS434TR jumper setting

	OPEN	CLOSE
J1	Normal <input type="checkbox"/>	FB-Master/Slave <input checked="" type="checkbox"/>
J2	Normal/FB-Master <input type="checkbox"/>	FB-Slave <input checked="" type="checkbox"/>
J3	Reserved <input type="checkbox"/>	- <input checked="" type="checkbox"/>
J4	Not effected <input type="checkbox"/>	- <input checked="" type="checkbox"/>
J5	Baud rate 4800 <input type="checkbox"/>	9600 <input checked="" type="checkbox"/>
J6	Enhanced Mode <input type="checkbox"/>	Legacy <input checked="" type="checkbox"/>

Scale: 1:1.5

	design.:	modif.:	Type:	System-No.:	
	Date:	16.03.2021	TRANSMITTER	ERGO V2 / K	188555-S2
	Name:		Customer:		Page:
	checked:		Article-name:		1 / 1
				Item-No.:	
