

PUSH-BUTTONS ASSIGNMENT

Button	Normal mode Command	Shift mode Command
1	out1+out16	out7+out16
2	out2+out16	out8+out16
3	out3+out16	out9+out16
4	out4+out16	out10+out16
5	out5+out16	out11+out16
6	out6+out16	out12+out16
7	ON/shift	Normal
8	OFF	OFF

The Pocket Control Unit (PCU) turns on in NORMAL mode when button no. 7 is pushed.

When PCU is ON, button 7 toggles between two operative modes NORMAL and SHIFT.

- in NORMAL mode (LED no. 2 off)
buttons 1 to 6 command outputs from 1 to 6)

- in SHIFT mode (LED no. 2 lit)
buttons 1 to 6 command outputs from 7 to 12)


The PCU turns off when button no. 8 is pushed or automatically after 5 min is not used.

Each push-button, in both operative modes commands the respective output and the DV output contemporaneously.

The DV output turns off with a 0.5 s delay after all buttons have been released.

The Emergency Stop output is positive only when the PCU is ON.

DTM Deutsch connectors

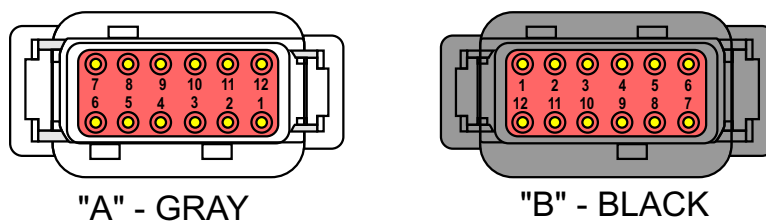

Conn.	Description
A1	out16 (DV)
A2	out15
A3	-Supply voltage
A4	out14
A5	Emergency Stop
A6	+Supply voltage
A7	out1 (P1)
A8	out2 (P2)
A9	out3 (P3)
A10	out5 (P5)
A11	out4 (P4)
A12	out6 (P6)
B1	out7 (shift P1)
B2	out8 (shift P2)
B3	out9 (shift P3)
B4	out10 (shift P4)
B5	out11 (shift P5)
B6	out12 (shift P6)
B7	RS232 TX
B8	RS232 RX
B9	out13
B10	out17
B11	out18
B12	out19

SW: FC60004M

Supply voltage: 10 - 28V

Max current specifications:

- OUT1 to OUT19: 2,5 A
- The whole receiver must not exceed: 10 A
- Emergency stop output: 10A

FABERCOM	CODICE: PREMUT33L1S3
DESC: Scanreco G5 ON/OFF radio remote control with 8 buttons Pocket control unit, 12 outputs (voluntary turn-on) and DV out.	
FILE: \Radio_Scanreco\G5\Produzione\G5-24\PREMUT33L1S3.cdr	
DATA: 14/05/15	FOGLIO 1 DI 1