

SERBATOI LATERALI SL PIASTRA FILTRO SIDE MOUNTING SL TANKS WITH FILTER PLATE

CODICE FAMIGLIA
FAMILY CODE

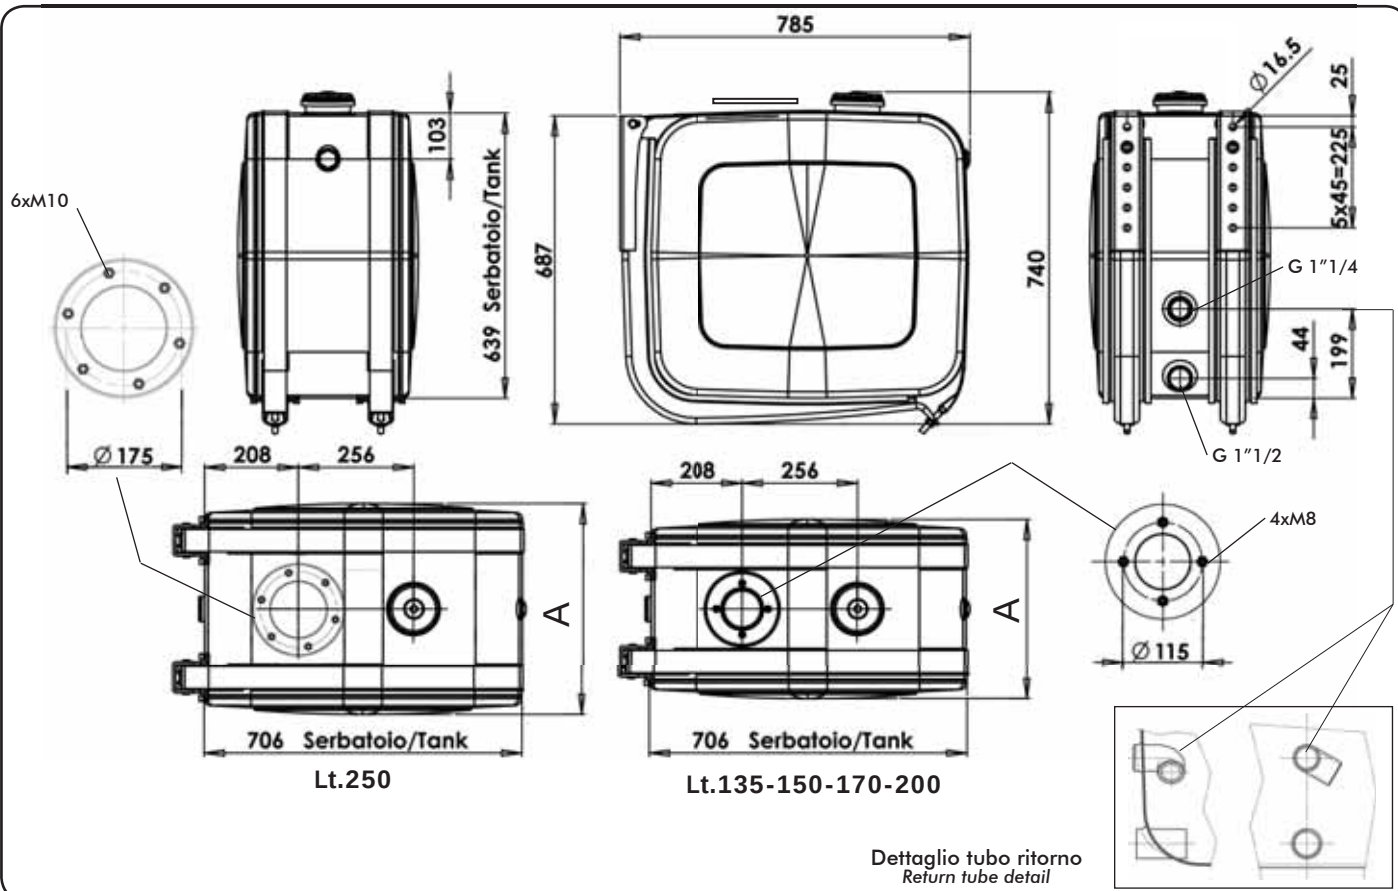
135-610-1

CAPACITÀ SERBATOIO Lt da/from 135
TANK CAPACITY Lt a/to 250



Sono serbatoi costruiti con le più moderne tecnologie per garantire la massima affidabilità e durata nel tempo, oltre che un aspetto esteriore perfettamente integrabile sui moderni trattori stradali. Vengono verniciati con polvere epossidica grigia (RAL 7021). Vengono forniti completi di staffe di supporto con relative fasce e protezioni in gomma, tappo riempimento e sfiato con filtro aria sostituibile, livelli olio e flangia predisposizione filtro. La gamma di accessori rende il loro impiego particolarmente flessibile. **La piastra cieca è fornita di serie.**

Based on the latest technology, these tanks are produced to ensure maximum reliability and longer lifetime as well as an exterior aspect that can be perfectly integrated. They are painted with grey epoxy powder (RAL 7021). They are supplied complete with support brackets, bands and rubber protections, filler cap and breather with replaceable air filter, oil level gauge and flange for filter options. High versatility is granted by a wide choice of available accessories. The blank flange is provided included in the standard equipment.



Capacità/Tank capacity Litri Effettivi/ Useful Litres	Codice di ordinazione / Order code Acciaio / Steel	A mm
		
135	135-610-11352	350
150	135-610-11503	400
170	135-610-11709	450
200	135-610-12002	500
250	135-610-02504	600



SERBATOIO SPROVVISTO DI TAPPO G 1-1/4" DA ORDINARE SEPARATAMENTE
CAP G 1-1/4" MUST BE ORDERED SEPARATELY
TAPPO/CAP: 540-002-00165 - RONDELLA/WASHER: 116-009-11137

118-013-00201 : TAPPO DI RIEPIIMENTO / FILLER CAP

Già compreso nel serbatoio. Solo per ricambi. / Already included with the tank. Only for spare part.

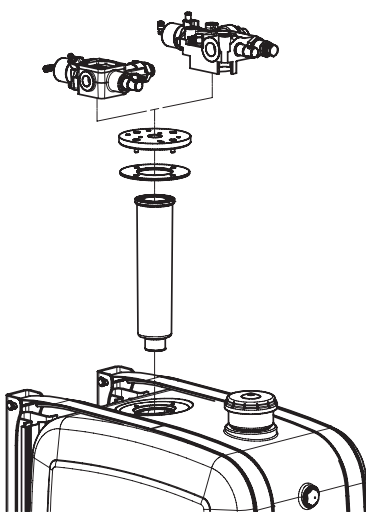


pag.15

OMFB
HYDRAULIC COMPONENTS

O.M.F.B. S.p.A. Hydraulic Components
 We reserve the right to make any changes without notice.
 Edition 2004.09 No reproduction, however partial, is permitted.
 Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
 Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:info@omfb.it

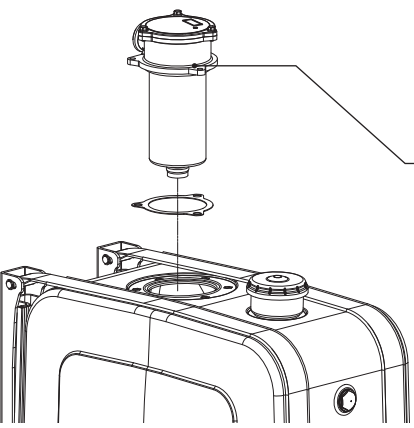

COMPANY WITH QUALITY MANAGEMENT
 SYSTEM CERTIFIED BY DNV
 = ISO 9001:2008 =

Filtro e piastra di chiusura predisposta per il montaggio della valvola.
Filter and mounting flange for tipping valve.

	CAPACITA' SERBATOIO / TANK CAPACITY	135 L 150 L 170 L 200 L		VALVOLA / VALVE	FM / FP 80 Modular 150 AL	PIASTRA PER VALVOLA VALVE MOUNTING PLATE	121-994-00182	(vedi tabella 7 - see table 7)
					Modular 150 AL Modular 250		121-994-00226	
		250 L			Modular 150 AL Modular 250		121-994-00217	
		135 L 150 L 170 L 200 L		FILTRO / FILTER	118-001-12176	25 µm	Filtri immersi Submerged filters	(vedi tabella 4/5 - see table 4/5)
					118-001-11177	60 µm		
					118-001-12756	30 µm		
		250 L			118-001-11757	60 µm		

Codice fascicolo: 997-400-13510

Filtro flangiato senza possibilità di montare valvole.
Filter without mounting flange for tipping valves.

	Filtro flangiato Flangible filter (vedi tabella 2-3 see table 2-3)	 Serbatoio Tank 135 L 150 L 170 L 200 L	Acciaio / Steel 90 µm	90 L	118-001-00358
			Acciaio / Steel 60 µm	85 L	118-001-01357
			Cellulosa rinforzata Reinforced cellulose 25 µm	75 L	118-001-02356
			Cellulosa rinforzata Reinforced cellulose 10 µm	55 L	118-001-03355
			Microfibra Micro-fibre glass 25 µm	55 L	118-001-04354
			Acciaio / Steel 90 µm	105 L	118-001-00401
			Acciaio / Steel 60 µm	100 L	118-001-01400
			Cellulosa rinforzata Reinforced cellulose 25 µm	100 L	118-001-02409
			Cellulosa rinforzata Reinforced cellulose 10 µm	75 L	118-001-03408
			Microfibra Micro-fibre glass 25 µm	75 L	118-001-04407
		 Serbatoio Tank 250 L	Acciaio / Steel 60 µm	170 L	118-001-01455
			Cellulosa rinforzata Reinforced cellulose 25 µm	175 L	118-001-02454
			Acciaio / Steel 60 µm (Sez. maggiorata/Larger oil passage)	200 L	118-001-01473
			Acciaio / Steel 90 µm	270 L	118-001-00509
			Acciaio / Steel 60 µm	260 L	118-001-01508
			Cellulosa rinforzata Reinforced cellulose 25 µm	270 L	118-001-02507
			Cellulosa rinforzata Reinforced cellulose 10 µm	220 L	118-001-03506
			Microfibra Micro-fibre glass 25 µm	220 L	118-001-04505

Data: Mercoledì 10 ottobre 2012

Codice foglio: 997-135-61020 Rev: AB