




ALHP2A0 [ALAP2A0] (SAE "A" 2 ŚRUBY)




"D" and "d" ports are machined in compliance with threaded port with O-ring seal in truncated housing SAE J1926/1(ISO J1926-1).

Porty "D" i "d" wykonane w standardzie SAE J1926/1(ISO J1926-1).

OUTLET

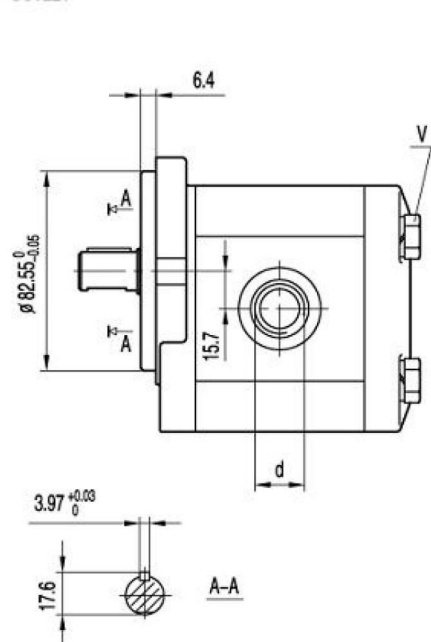

INLET

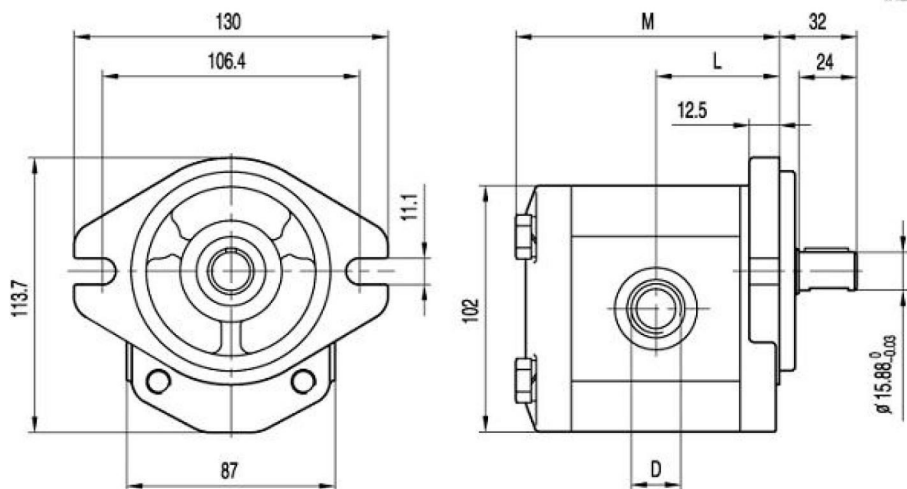

Type/Typ	Displacement / Wydajność (cm ³ /rev)	Max Pressure / Maks. ciśnienie			Max. Speed / Maks. Prędkość (r/min)	Min. Speed / Min. Prędkość (r/min)	Dimensions / Wymiary			
		P1	P2	P3			M	L	D	d
		bar	bar	bar			mm	mm	mm	mm
ALHP2A0-X-3	3	270	285	300	4000	800	91.1	43.6	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-4	4	270	285	300	4000	600	92.7	44.4	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-6	6	270	285	300	4000	600	96	46	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-8	8	270	285	300	3500	500	99.3	47.7	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-10	10	270	285	300	3000	500	102.6	49.3	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-12	12	270	285	300	3000	500	105.9	51	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-14	14	250	265	280	4000	500	109.3	52.7	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-16	16	250	265	280	4000	500	112.7	54.4	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-18	18	250	265	280	3600	400	116	56	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-20	20	220	235	250	3200	400	119.3	57.7	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-22	22	220	235	250	3000	400	122.6	59.3	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-25	25	200	215	230	3000	400	127.6	61.8	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-28	28	180	190	200	2500	400	132.6	64.3	1 1/16-12UNF	7/8-14UNF
ALHP2A0-X-30	30	160	170	180	2500	400	135.9	66	1 5/16-12UNF	7/8-14UNF