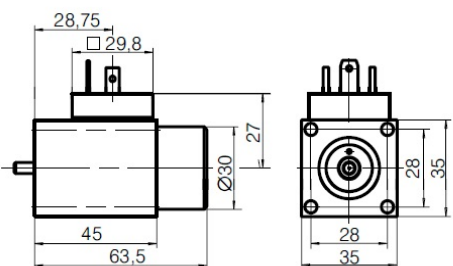


Nennspannung [V]	Innenwiderstand [ $\Omega$ ]	Grenzstrom [A]	Leistung [W]	Stecker	Bestell-Nummer	Abmessungen	Zeichnungs-Nummer	Anwendungen	
12V	4,55	1,85	-	DIN-Stecker (DIN43650) 3-polig	217227	GS-Regelmagnet GRFY035F20E10  	4.215181-..	LM06PM2.. LM06PM3.. LP10.. SR2T.. SR3T.. LM06PMG.. SR3G.. SR3C..	
	2,8	2,25	-		215178				
24V	12,7	1,08	-		215179				
	18,7	0,925	-		217699				
37V	35,0	0,69	-		220847				Befestigungs-Schrauben M4x55 (Id-Nr. 223527) O-Ring 18,7x1,8 (Id.Nr. 248700)