
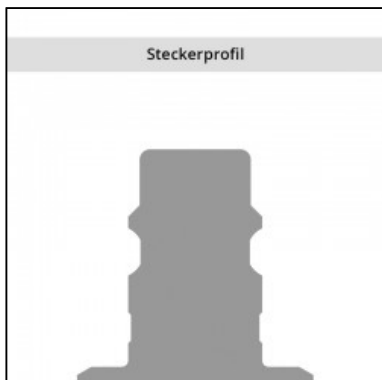
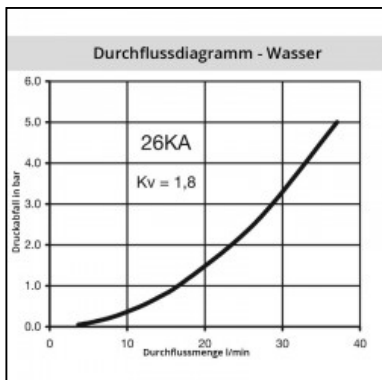
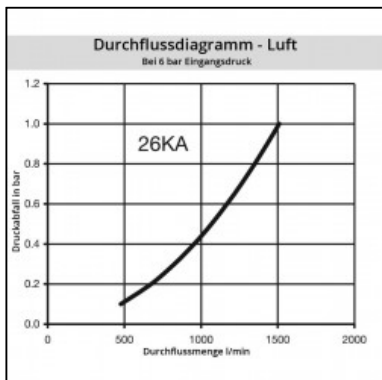


26KAAW21MPX

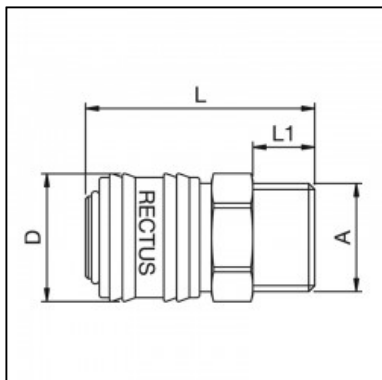

Description

Quick coupling single shut-off, male thread G 1/2, nominal diameter 7,2, < 35 bar, brass, seal NBR

Universal brass coupling with European standard industrial profile. Coupling system with single-hand operation and standard-valve. Small mass size. The ergonomicsleeve design prevents dirt on the valve body.

Details

Serie	26KA
Bore in mm	7,2
Bore area in mm ²	40
Advantages	One-hand operation. European standard.
Compatibility	RECTUS 25 RECTUS 1600/1625 TEMA 1600
Working pressure	PB = 35 bar maximum static working pressure with safety factor 4 to 1.
Working temperature	-20°C up to +100°C (NBR) -40°C up to +120/150°C (EPDM) -15°C up to +200°C (FKM) depending on the medium.
Shut-Off	Quick coupling Single Shut-Off
Connection	Male Thread 1/2"
Connection description	male pipe thread of Whitworth form ISO 228 1/2
Material	Brass
Material description	brass CuZn39Pb3 2.0401 (except sleeve)
Seal	NBR
Seal description	Nitrite-butadiene rubber
Surface	blank finish
Material connection	brass
Material valve body	brass
Material sleeve	brass
Material valve	brass
Material spring snap ring	stainless steel AISI 301
Material balls/pins	stainless steel AISI 420
Material seal	Perbunan®
Weight in kg	0.0860
Coding	No
Self-venting coupling	No
Safety locking system	No
Single-hand operation	Yes
Two-hand operation	No
Ball locking	No
Pin lock	Yes
Ultra-FLO-valve	No
Vacuum suitable	No
Water-resistant	Yes
Flat-sealing	No
Suitable breath / respiratory protection	No
Pressure eliminator	No
Hydraulics	No
Pneumatics	Yes
Standard product	Yes
Mould coupling	No

Dimensions

Connection A	G 1/2
SW mm	22
L mm	44
L1 mm	12
D mm	25

More Details:

