





## Type of the solenoid coil


Designation	Dimensional sketch	Description
<b>E1</b>		Solenoid coil with terminal for the connector plug to DIN 43 650.
<b>E2</b>		Solenoid coil with integrated quenching diode and terminal for the connector plug to DIN 43 650.
<b>E3</b>		Solenoid coil with terminal for AMP connector plug.
<b>E4</b>		Solenoid coil with integrated quenching diode and terminal for AMP connector plug.
<b>E5</b>		Solenoid coil with integrated rectifier and terminal for the connector plug to DIN 43 650.

## Connector plug to DIN 43 650

	Designation	Typ	Model	Max input voltage
	<b>K1</b>	Plug B (black)	without rectifier	250V DC
				230V AC
		Plug A (grey)	without rectifier	250V DC
				230V AC
	<b>K2</b>	Plug B (black)	without rectifier and with LED	12...30V DC
				230V AC
		Plug A (grey)	without rectifier and with LED	12...30V DC
				230V AC
	<b>K3</b>	Plug B (black)	with rectifier	250V AC
		Plug A (grey)	with rectifier	250V AC
	<b>K4</b>	Plug B (black)	with rectifier and with LED	250V AC
		Plug A (grey)	with rectifier and with LED	250V AC

## Spare parts

- 1 Solenoid coil
- 2 Solenoid fixing nut + sealing ring
- 3 Connector plug
- 4 Set of sealing

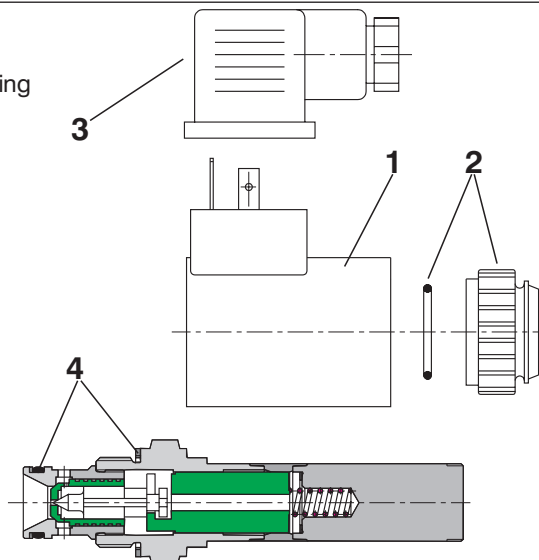

Solenoid coil					
Type designation of the coil voltage	Type of the coil				
	E1	E2	E3	E4	E5
	Ordering number				
01200	936-0022	936-0690	936-0670	936-0680	
01400	936-0650	936-0691	936-0673	936-0681	
02100	936-0651	936-0692	936-0674	936-0682	
02400	936-0026	936-0693	936-0672	936-0683	
04200	936-0653	936-0695	936-0676	936-0685	
04800	936-0031	936-0696	936-0677	936-0686	
06000	936-0654				
10200	936-0655				
20500	936-0036				
02450					936-2125
11550					936-2175
23050					936-2185

Solenoid fixing nut + sealing ring		
Type of the nut	Sealing ring	Ordering number
Standard nut	18x1.5	486-9010

Connector plug to DIN 43 650				
Type designation	Model	Max. input voltage	Connector plug A grey	Connector B black
			Ordering number	
K1	without rectifier	0...250V DC	936-9902	936-9901
		0...230V AC		
K2	without rectifier and with LED	12...30V DC	936-9908	936-9907
		0...230V AC	936-9906	936-9905
K3	without rectifier	0...250V AC	936-9904	936-9903
K4	without rectifier and LED	250V AC	936-9910	936-9909

Set of the seal			
Type	Standard - NBR70	Dimensions, number	Ordering number
ROE2-06	U-SEAL	22.5x28x1.5	404-9000
	O-RING	14x1.78	
	Back-up ring	14.73x17.43x1.14	

## Caution!

- The packing foil is recyclable.
- The sealing rings pos. 5 and 6 are supplied with each valve.
- The technical information regarding the product presented in this catalogue is for descriptive purposes only. It should not be construed in any case as a guaranteed representation of the product properties in the sense of the law.

**HYTOS a.s., CZ - 543 15 Vrchlabí, Czech Republic**

Tel.: +420-438-403111, Fax: +420-438-403421, e-mail: sales@hytos.cz