



MOTOR DATA	
DISPLACEMENT	16,0 ccm
MAX.CONT.PRESSURE	180 bar
SPEED RATE	500 TO 3500 min ⁻¹
MAX. SHAFT SEAL PRESSURE	2 bar
ROTATION	BI - DIRECTIONAL

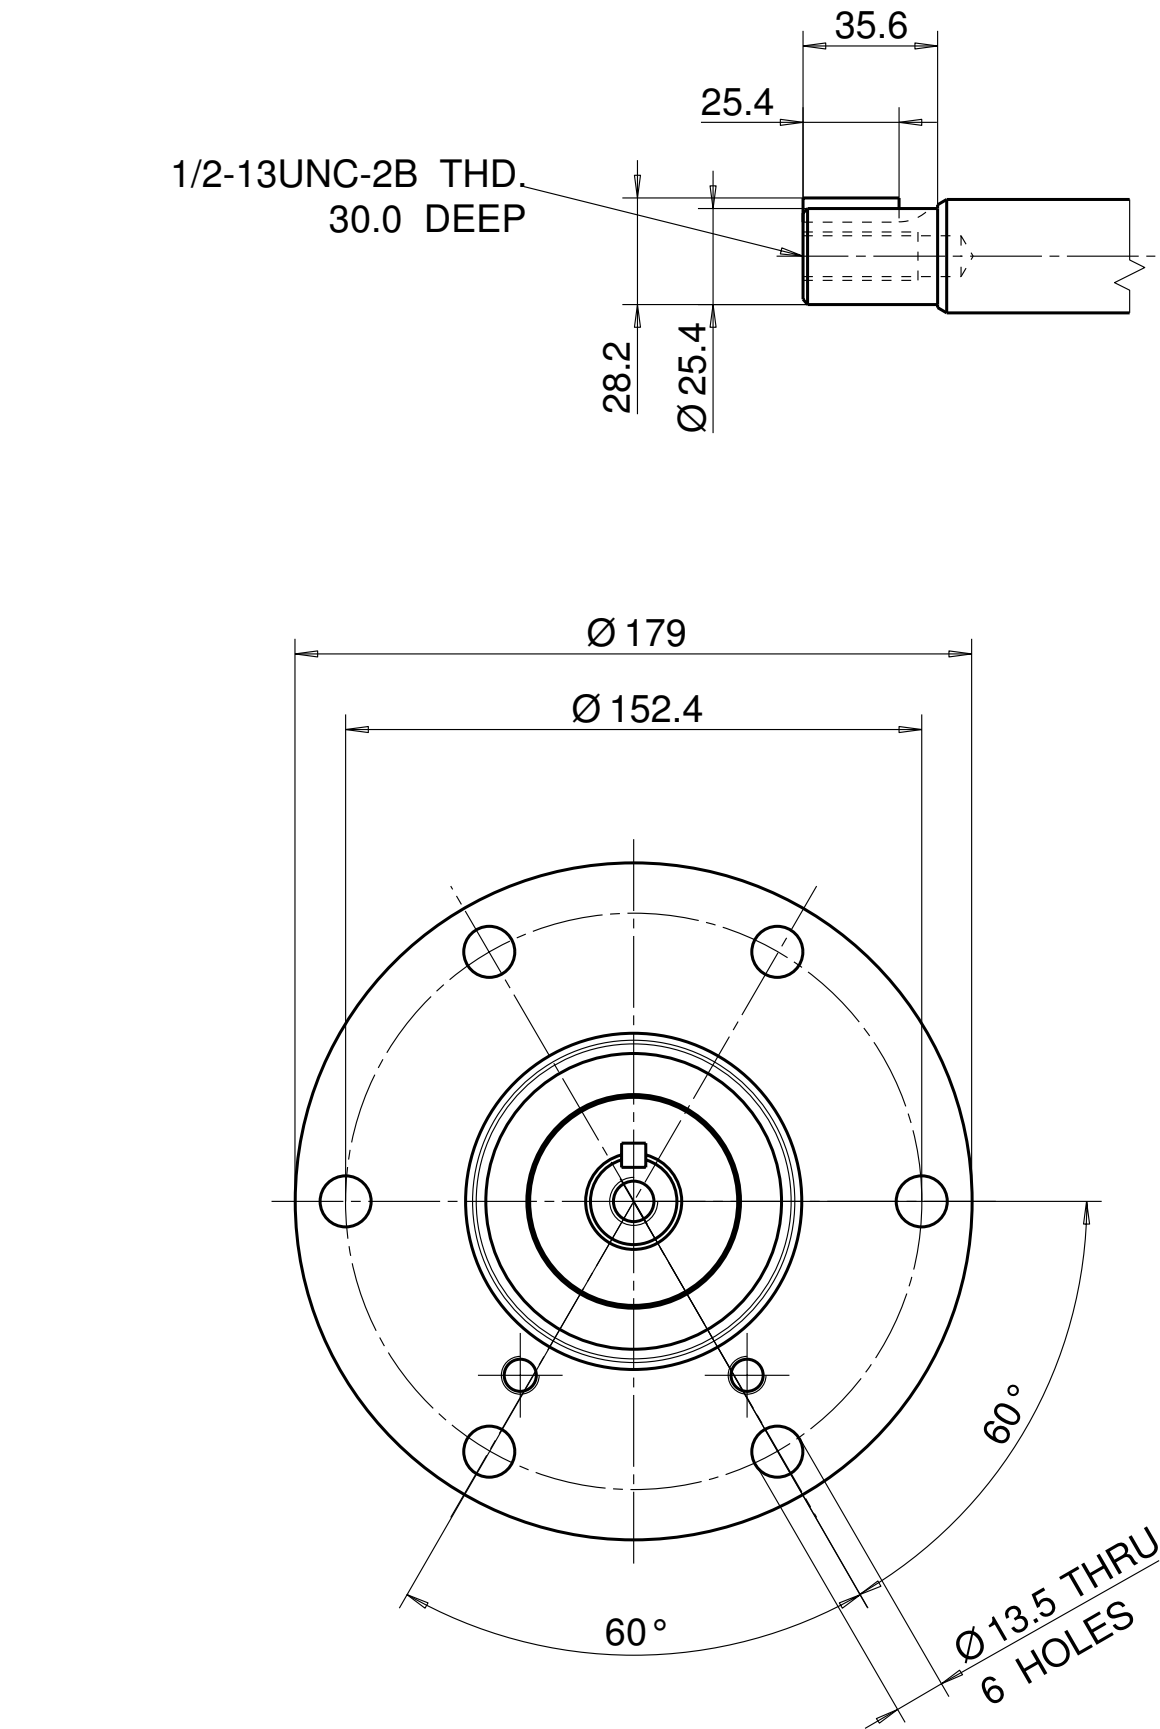


THIRD ANGLE PROJECTION
EXP NO.
FIRST USED
07 - 05 - 918
334 9218 087

SYM.	REVISIONS
------	-----------

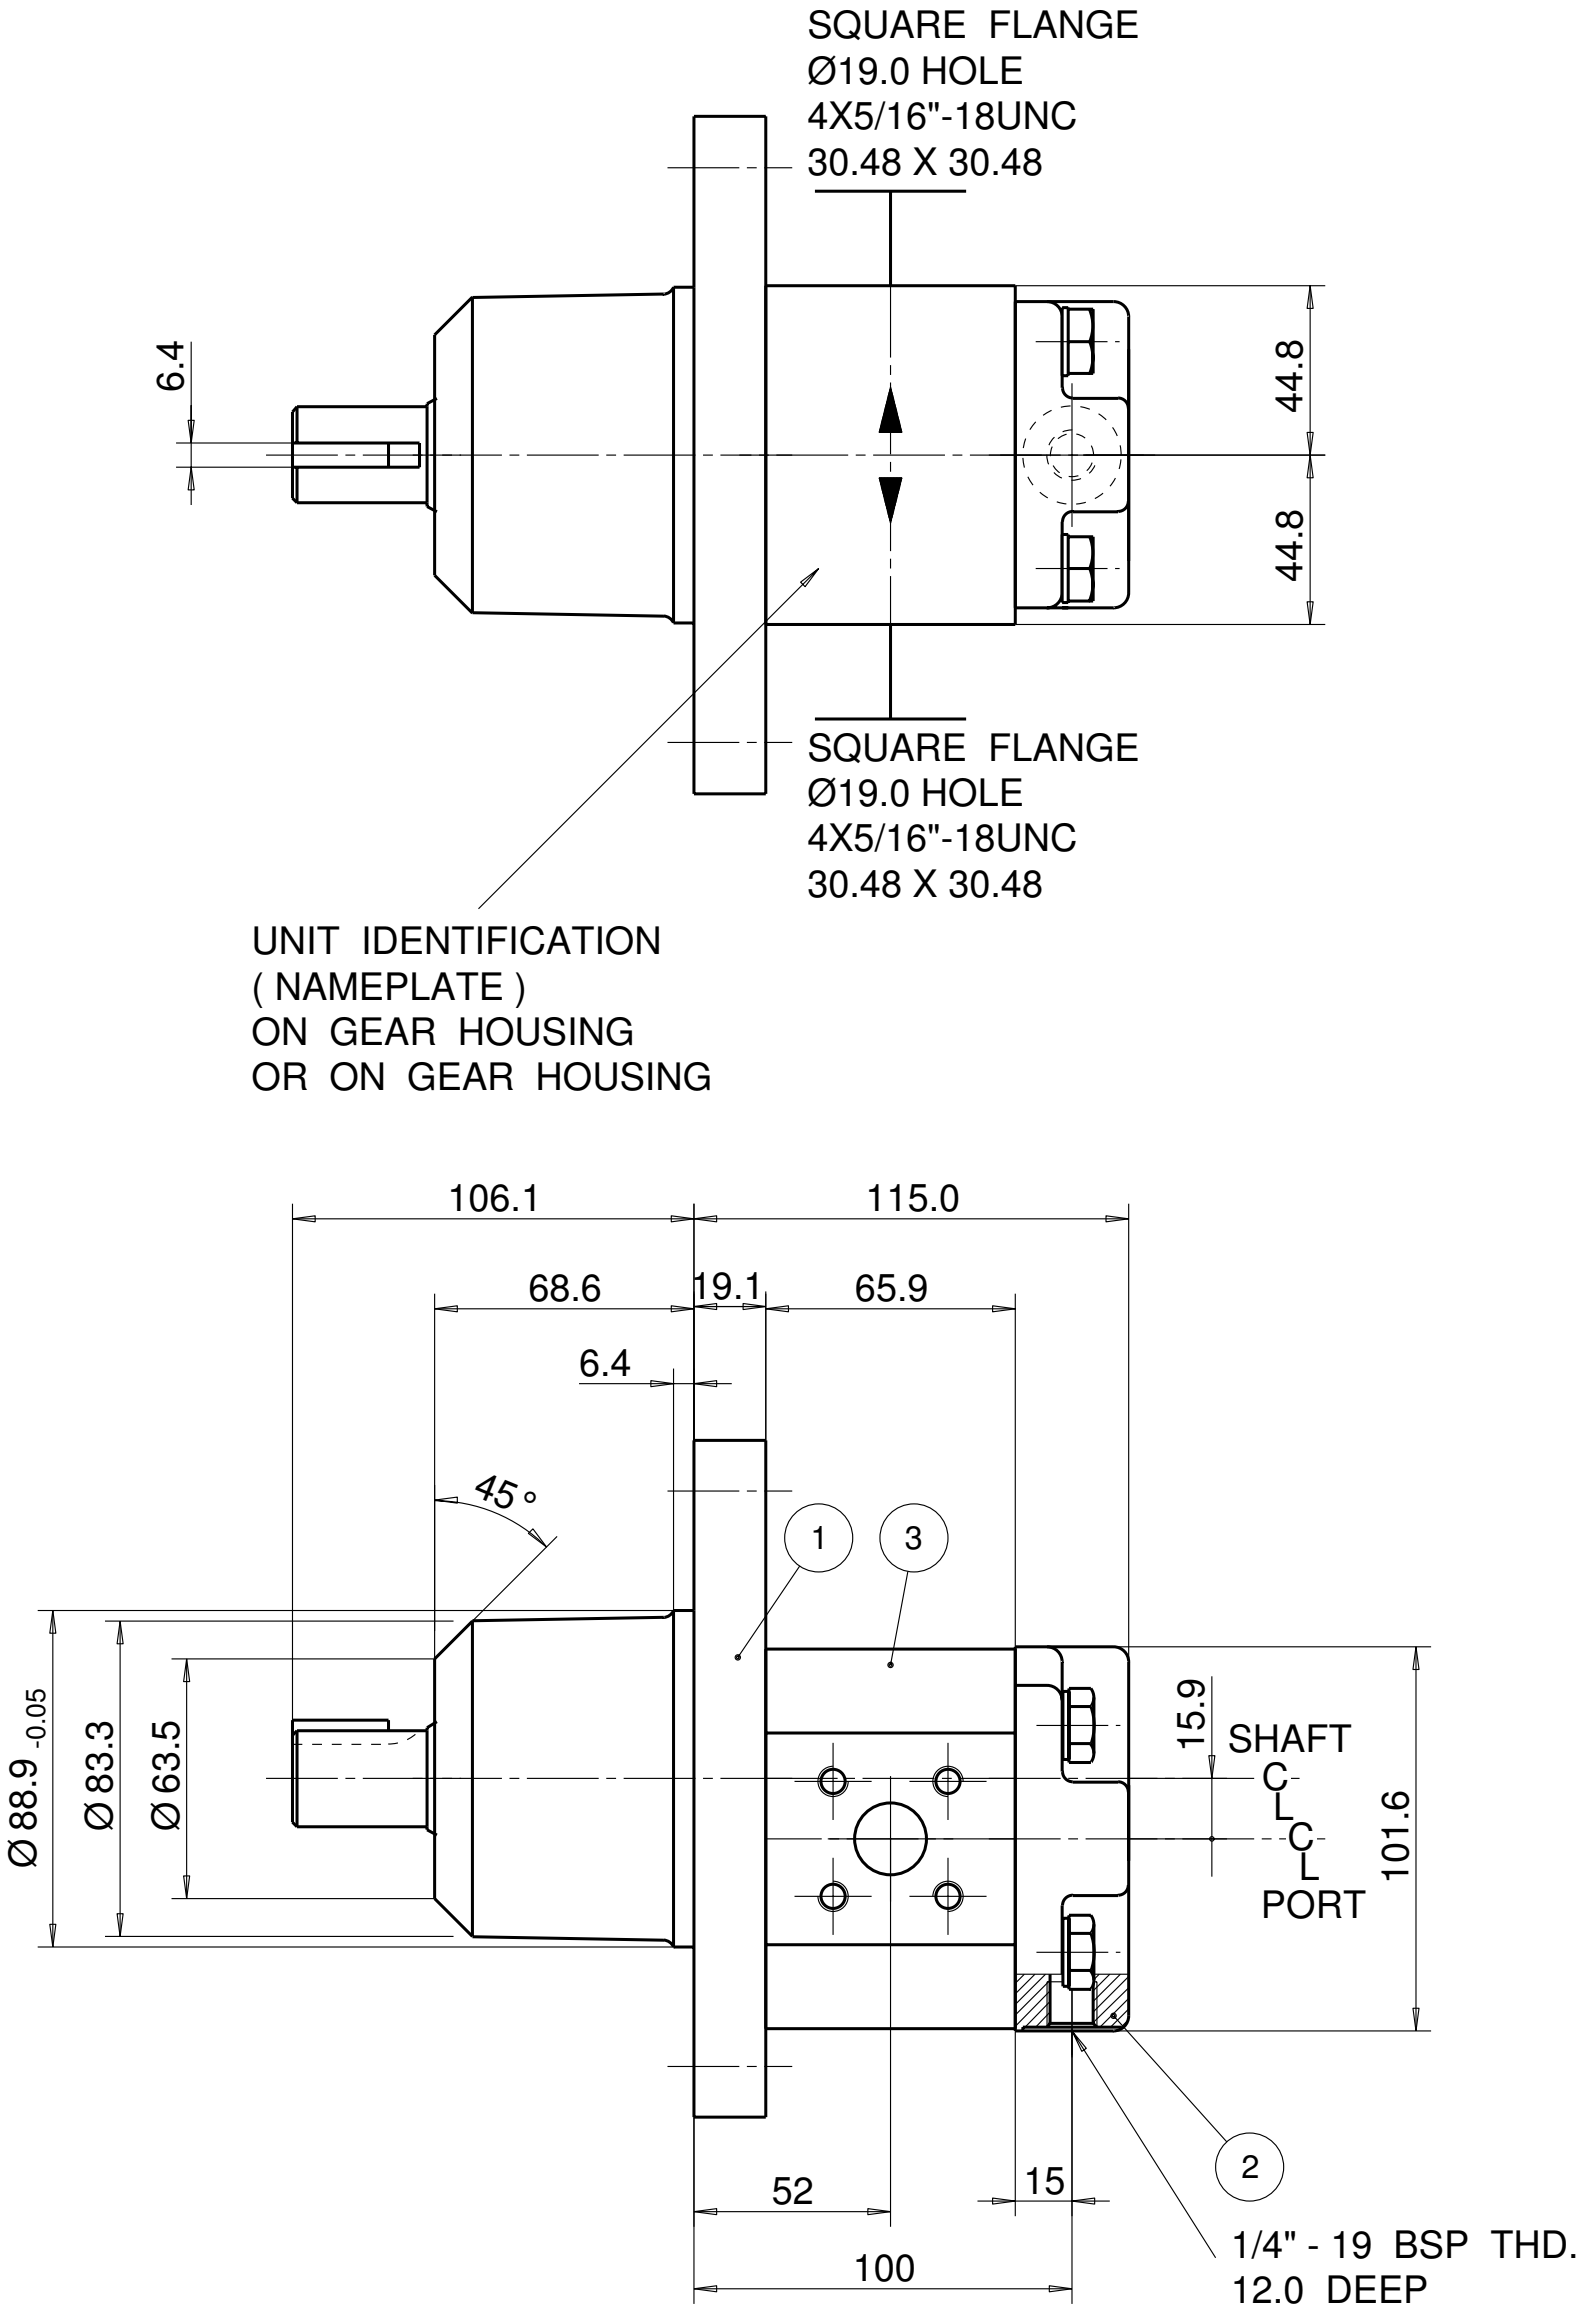

UNIT COMPLETELY TO BE PAINTED
EXCEPT : MOUNTING FACE
PORTS
SEAL FACES
NAMEPLATE
COLOUR : BLACK (RAL 9005) SEE ZSS - A1

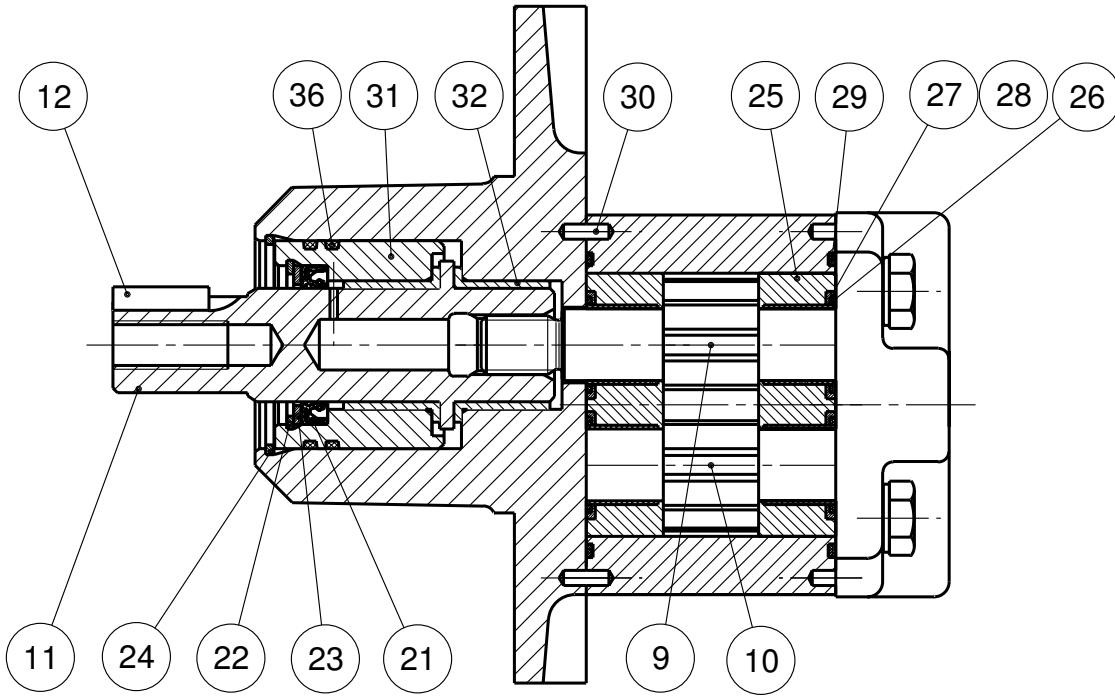

NOTE
1 FOR ASSEMBLY INSTRUCTIONS SEE DWG. NO. "511-B2"
"PGM511 MOTOR ASSEMBLY INSTRUCTIONS".

28	8301-016-0B9	4	SEAL. CHAN.	36	9313-135-00G	2	O-RING
27	8301-016-0AB	4	SEAL. CHAN.	35			
26	8301-015-006	2	SEAL. BK-UP	34			
25	391 2185 133	2	THRBLK/BSHG	33			
24	9211-675-00J	1	RING, SNAP	32	9521-401-00H	2	FLANGED BUSH
23	9222-550-00A	1	WASHER	31	8664-002-00E	1	BRG. CARRIER
22	391 2681 569	1	RING, SNAP	30	391 2080 078	2	PIN. DOWEL
21	9411-409-00W	1	SEAL. LIP	29	9313-145-00B	2	SEAL. SECT.
ITEM	PART NO	REQD		ITEM	PART NO	REQD	

BOM. COMPONENT			
20			
19			
18			
17			
16	391 1401 544	4	SCREW (95 MM)
15	391 3782 231	4	WASHER
14			
13			
12	9602-124-00D	1	KEY
11	8772-004-003	1	EXTENSION SHAFT
10	334 2716 000	1	DRIVEN GEAR
9	334 1116 001	1	DRIVE GEAR
8			
7			
6			
5			
4			
3	334 8116 832	1	HOUSING. GEAR
2	332 3020 096	1	HOUSING. PEC
1	334 5059 210	1	HOUSING. SEC
ITEM	PART NO	REQ'D	DESCRIPTION

THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND PROPRIETARY TO PARKER-HANNIFIN CORPORATION ("PARKER"). THIS DOCUMENT IS FURNISHED ON THE UNDERSTANDING THAT THE DOCUMENT AND THE INFORMATION IT CONTAINS WILL NOT BE COPIED OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN CONDUCTING BUSINESS WITH PARKER AND WILL BE RETURNED AND ALL FURTHER USE DISCONTINUED UPON REQUEST BY PARKER. ALL RIGHTS RESERVED.

PGM511A0160BZZ2Z3NK1K1B1B1G2		
MATERIAL	ADM CTR M	
H.E.-STD:	REV DTE 000000	
	WT 4.5 kg	DIMENSIONS ARE MM

Parker Pump & Motor Division Chemnitz	
DR.BY DATE WS 08MAY07	CH.BY DATE JS 08MAY07
334 9218 087	
© 2007 Parker Hannifin Corporation	