

F3 Pump



Contents.....	Page
Pump and Line selection	12
Specifications F3-81 and -101	43
Pump cross section	43
BPV-F3 Bypass valve 12 or 24 VDC without manual override	43
Installation Dimensions, F3-81 and -101	44 – 45
Port size	44 – 45
Standard versions	44 – 45
Block diagram engaging the F3 pump and Product Demand	46
Interface	46
suction fittings	56
Installation and start up	73

F3-81 and -101, ISO Specifications

Frame size F3-	81	101
Displacement [cm ³ /rev]	81.6	102.9
Max flow ¹⁾ [l/min]	180	216
Max operating pressure [bar]	400	400
Shaft speed [rpm]		
- short circuited pump (low press.)	2300	2300
- max selfpriming speed ²⁾	2200	2100
Torque ¹⁾ [Nm]	518	653
Max input power ³⁾ [kW]	105	126
Weight [kg]	16.7	16.7

¹⁾ Theoretical values

²⁾ Valid at an inlet pressure of 1.0 bar (abs.) when operating on mineral oil at a viscosity of 30 mm²/s (cSt).

³⁾ Max 6 seconds in any one minute.

NOTE: For noise level information, contact Parker Hannifin.


BPV-F3 Bypass valve 12 or 24 VDC Without manual override

Bypass valve, type	BPV-F3
Max pressure, continuous	350 bar
intermittent	400 bar
Solenoid voltage	12 or 24 VDC,
Power requirement	14 W
Operating mode	Activated solenoid: Check valve closed

Accessories / Spare Parts see page 64

- As the BPV valve is symmetrical, it can be 'turned 180°' to prevent interference with chassis components; it can be utilised for either left hand or right hand pumps.
- The valve function must only be activated or released (by means of the 24 VDC solenoid) at no-load (below 20 bar) system pressure.

Pump cross section

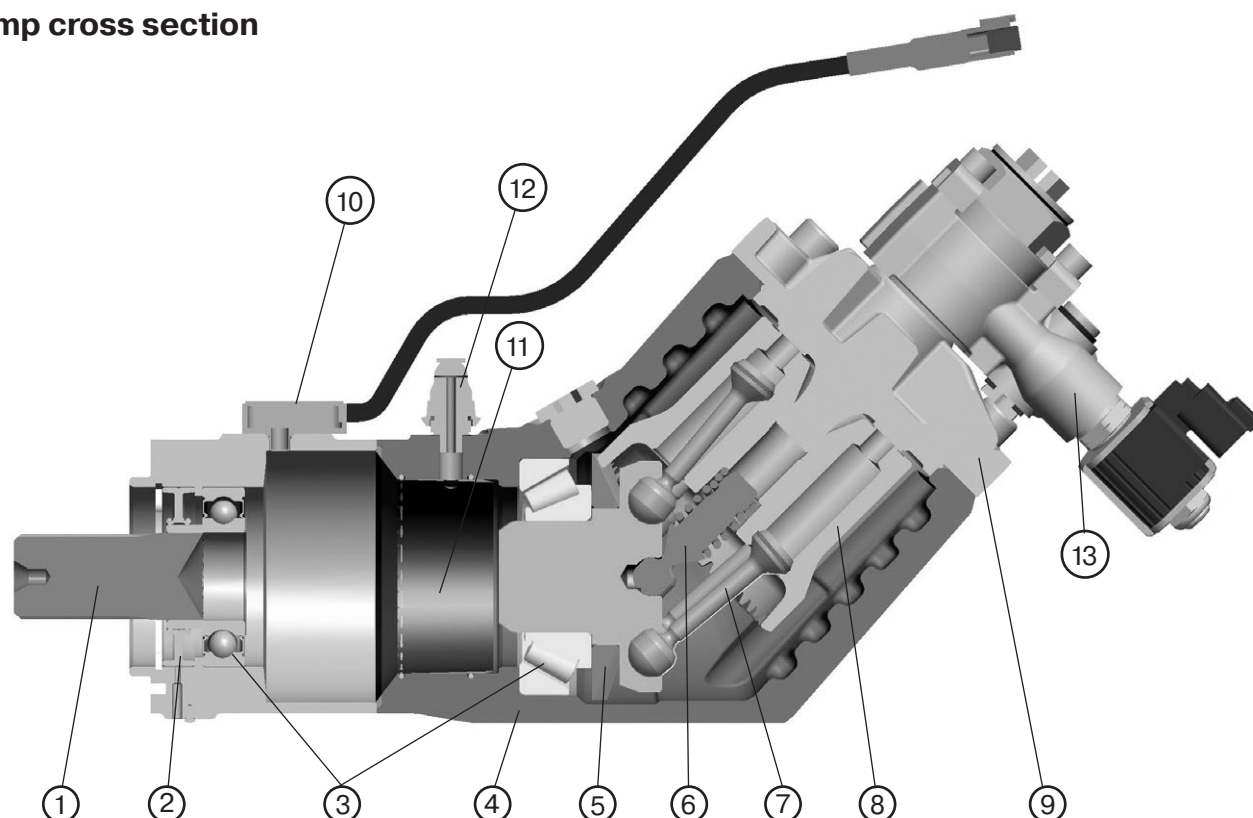

1. Input shaft
2. Shaft seals
3. Bearings
4. Housing


5. Timing gear
6. Barrel support
7. Piston with piston ring
8. Cylinder barrel

9. End cap
10. Position sensor
11. Air cylinder
12. Air fitting

13. Bypass Valve

F3-81 and -101

Right hand rotation

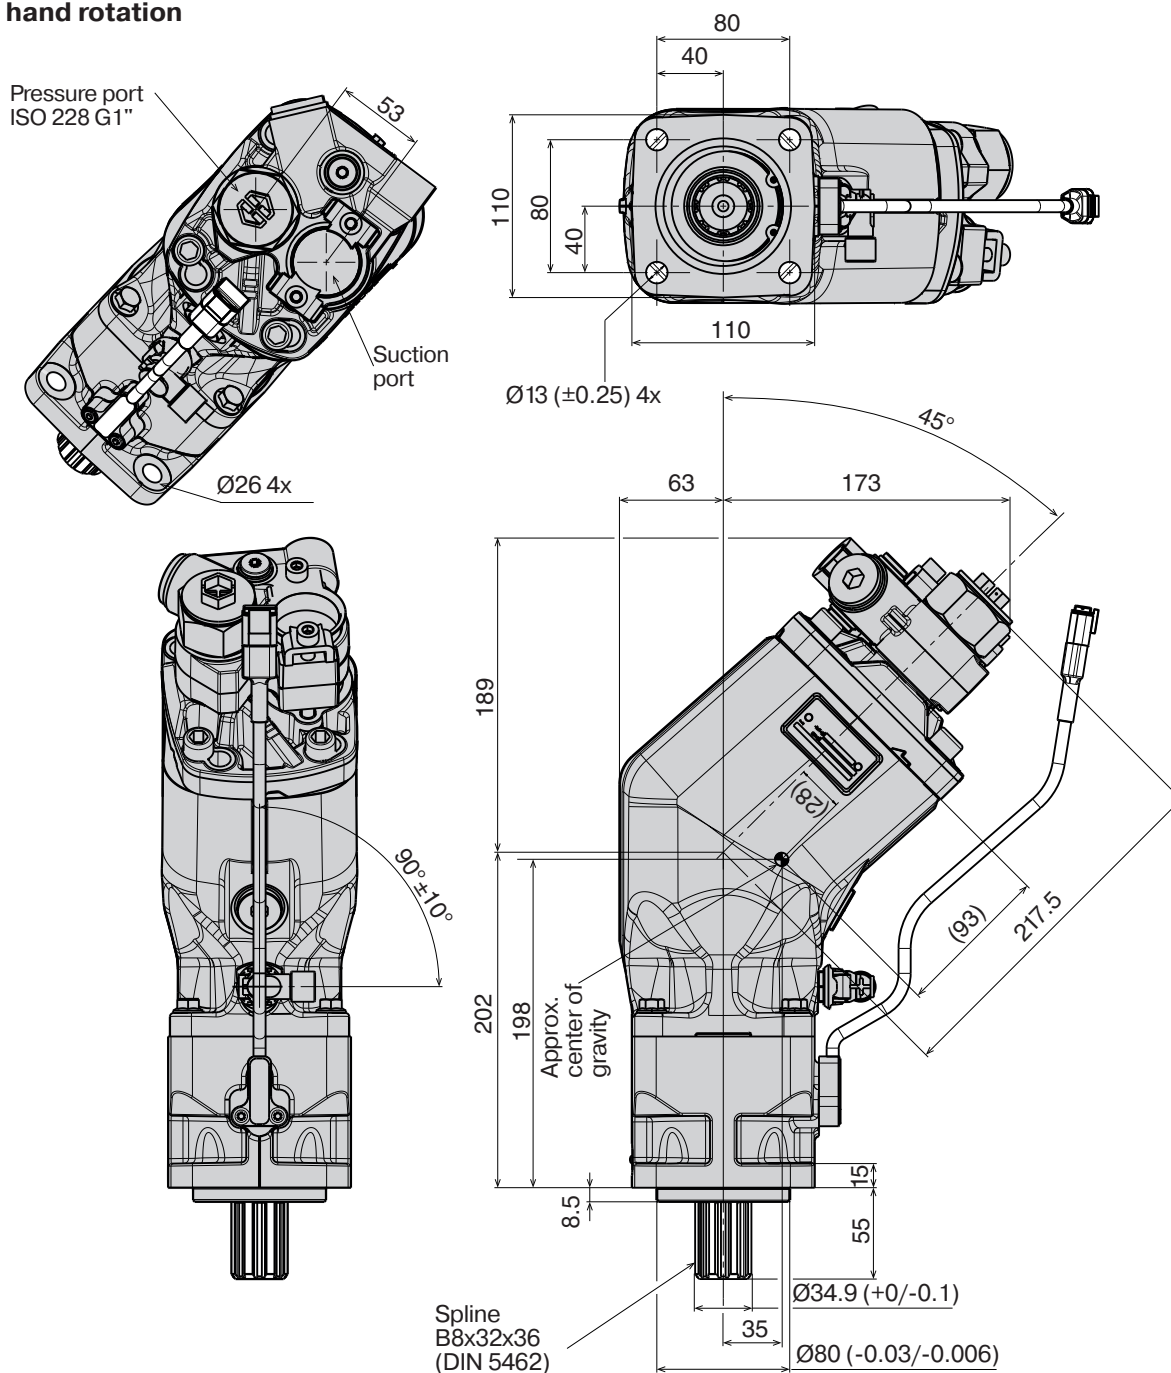

Port size

F3 frame size	Pressure port ¹⁾
-81	1"
-121	1"

¹⁾ BSP thread (fitting not included).


Standard versions

Designation	Ordering no. 24 VDC	Ordering no. 12 VDC
F3-81-R-	372 0091	3720382
F3-101-R-	372 0093	3720384

NOTE: The pump **does not** include a suction fitting; it must be ordered separately. See page 57ff.

F3-81 and -101

Left hand rotation

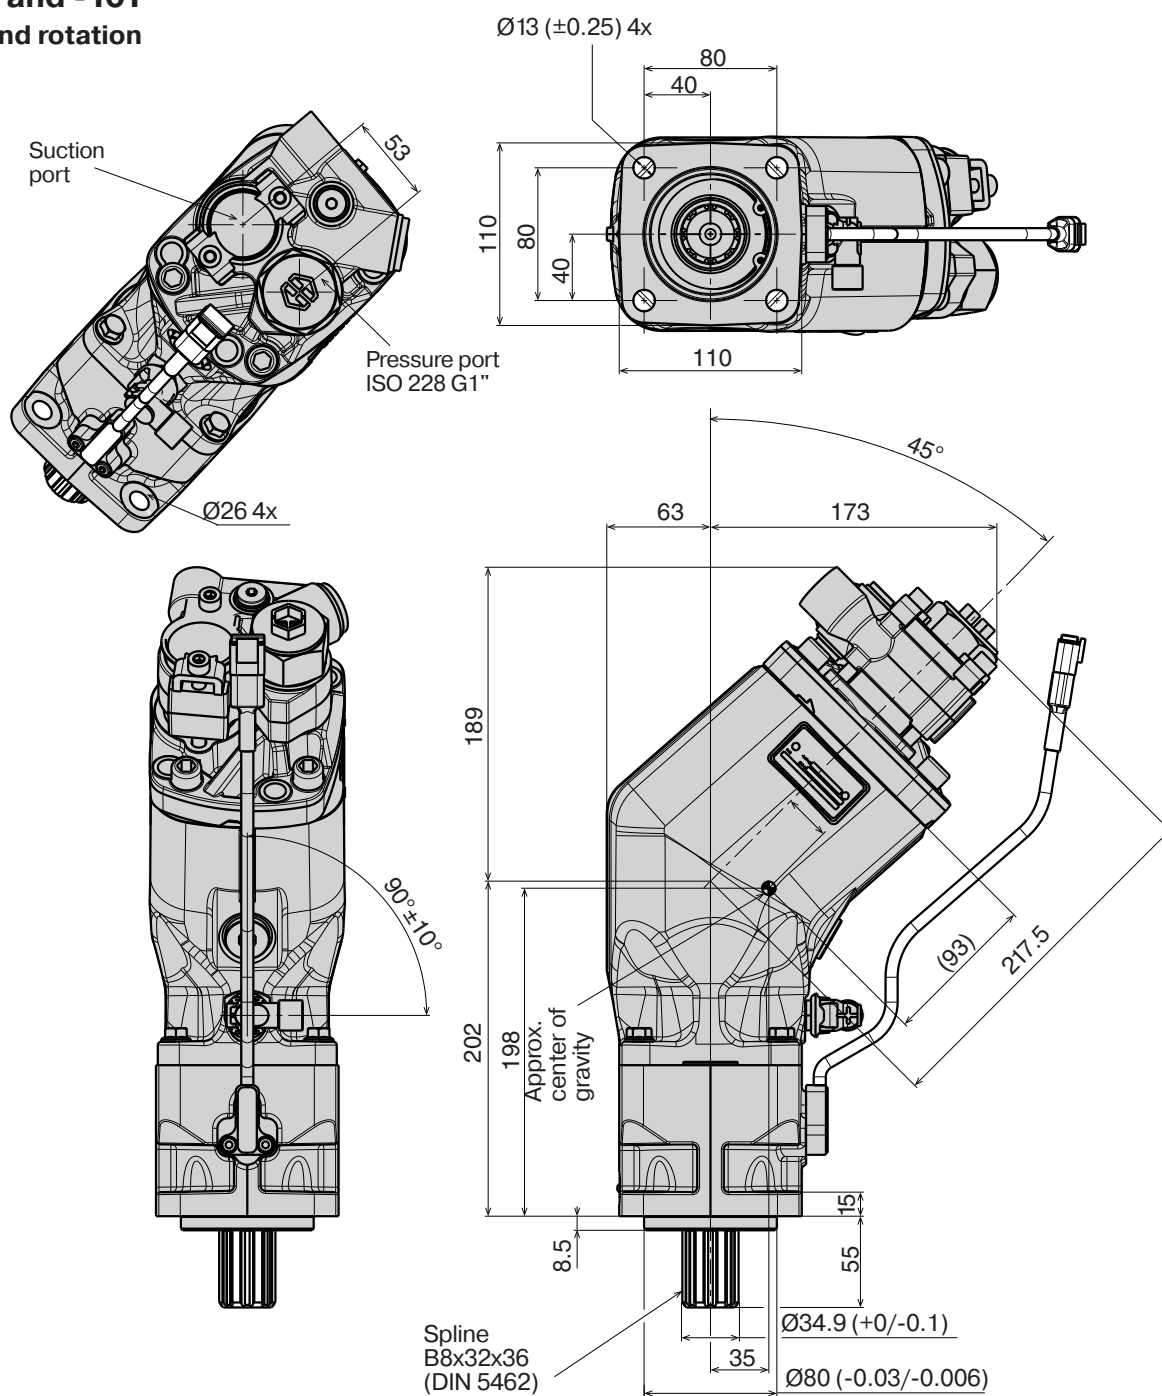

Port size

F3 frame size	Pressure port ¹⁾
-81	1"
-121	1"


¹⁾ BSP thread (fitting not included).

NOTE: The pump **does not** include a suction fitting; it must be ordered separately. See page 57ff.

Standard versions

Designation	Ordering no. 24 VDC	Ordering no. 12 VDC
F3-81-L-	372 0092	3720383
F3-101-L-	372 0094	3720385

Block diagram engaging the F3 pump

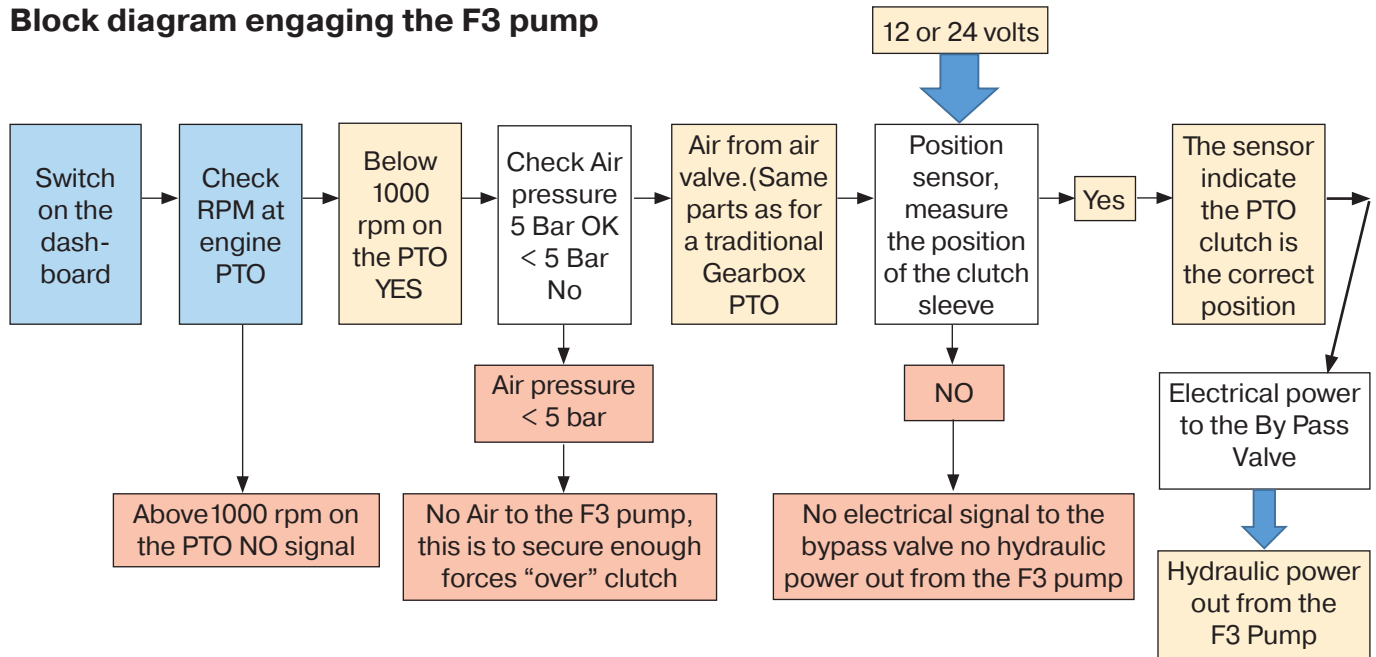

Product Demand

- Max engine speed before the F3 can be engaged (max shaft speed during engagement is 1000 rpm)
- Air pressure > 5 bar before the clutch can start to engage the pump

Interface

