Sequence and Unloading Valves 1PUL60

Unloading Valve, Pilot Operated, Spool Type, Hydraulic Pilot, External Drain 350 bar [5000 psi] • 60 l/min [16 US gpm]

■ DESCRIPTION AND OPERATION

This is a pilot operated, spool type unloading valve. Normally used in conjunction with a check valve, the valve remains closed from port 1 to 2 until the set pressure is reached. Pressure sensed downstream of the check valve at port 3 will pilot the valve open, allowing the pressure at port 1 unload to open to port 2. When the pressure in port 3 falls to 85% of the setting the valve will close and the pressure in port 1 will rise. It has a drain port 4 which allows the use of flow at port 2 in a secondary function. This valve can be used to dump the pump flow at minimum pressure in an accumulator system or in a two-pump unloading circuit.


SCHEMATIC




PERFORMANCE DATA

Rated pressure	350 bar [5000 psi]
Rated flow	60 l/min [16 US gpm]
Leakage	35 ml/min nominal
Pressure Ratio	85-90%
Weight	0.46 kg [1.01 lb]
Cavity	A12088


DIMENSIONS mm [in]



PERFORMANCE CURVES



MODEL CODE

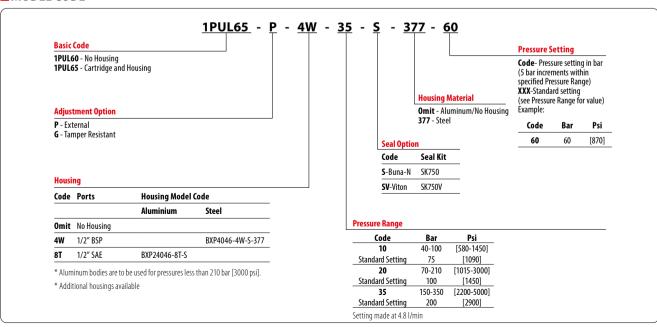

BC332375508106en-000202 34

