

SVS Eco LED valve form A 18mm LED+VDR 230V 2+PE field-wireable M16x1,5

Form A (18 mm)
230 V AC/DC with LED and VDR
metric

Image

Vicarious picture

Approvals**Form**

29165

Technical Data

Operating voltage	230 V AC/DC $\pm 10\%$
Operating current per contact	max. 1.5 A
Connection diameter	0.5...1.5 mm ²
Clamping range (cable diameter)	6...8 mm
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16 \times 1.5 mm
Contact figure	Cable outlet can be turned in 90° steps
Protection	IP65 inserted and tightened
Temperature range	-40...+60 °C


Commercial data

Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Minimum order quantity (piece)	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

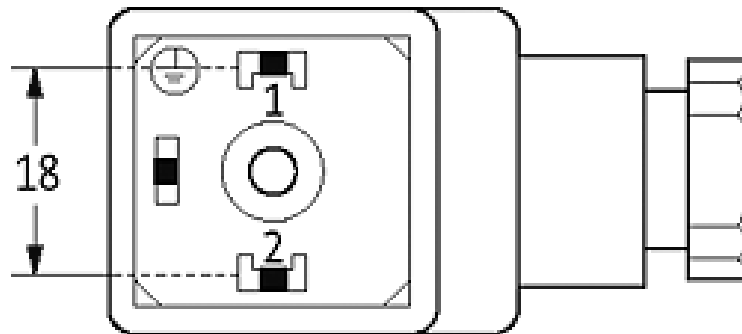

Circuit diagram

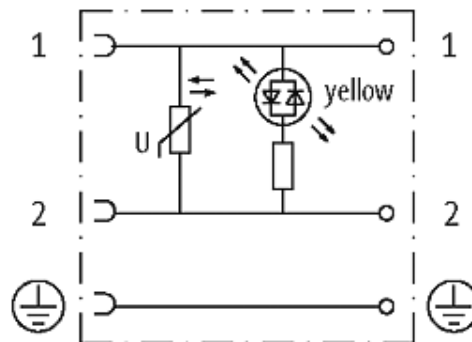

Dimension drawing

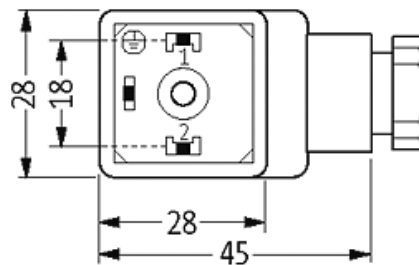

Height: 31 mm