
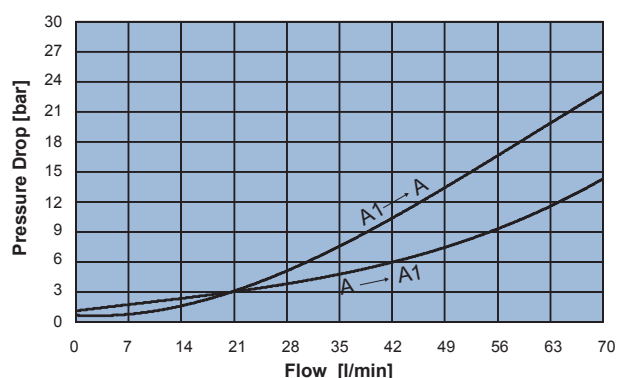
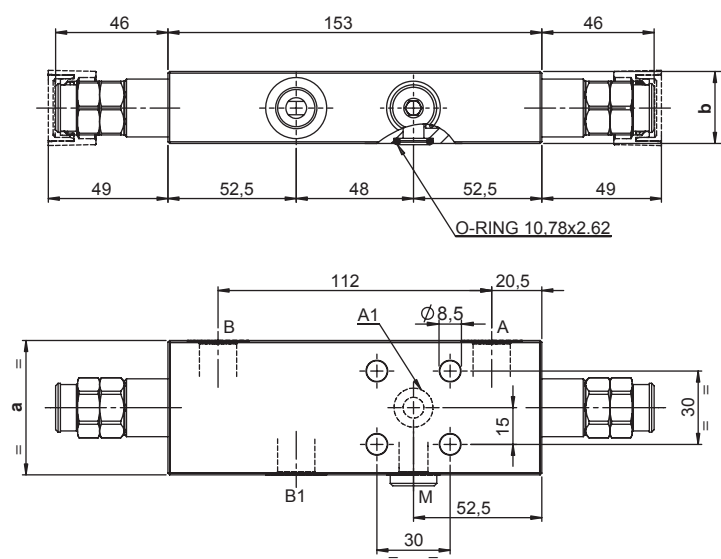


DOUBLE ACTING COUNTERBALANCE VALVE WITH COAXIAL CAVITY - A1 FLANGED 30x30

- Flow. **70 l/min**
- Max working pressure. **350 bar**
- Compensation. **Not Compensated**
- Weight G 3/8". **1,9 Kg**
- Weight G 1/2". **2,6 Kg**
- Tamper proof cap. **cod. 9021030190**

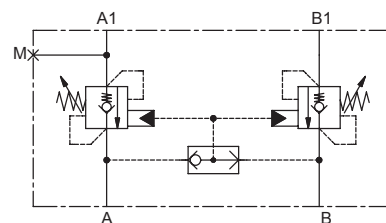

Note:

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

	a	b
03	55	29,5
04	65	34,5

Ordering code

H 5 0 6 1 N **S** **0 0**

PILOT RATIO	
40	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	60 - 210	120 - 350
Pressure Increase [bar/turn]	62	114
Standard setting 4 l/min [bar]	200	350

PORTS	03	04
A,B,B1	G 3/8"	G 1/2"
A1	Ø 9	Ø 9
M	G 1/4"	G 1/4"