




APPLICATIONS
ENGINEERING




Descrizione	Bimetallic temperature switch G1/2" IP65	Data Sheet	T55909.05Txx
Riferimenti	3110 G1/2" xx°C Nx	Stato	PF

3110 G1/2"

DIN 43650-A CONNECTOR 360° ROTATING CONNECTOR

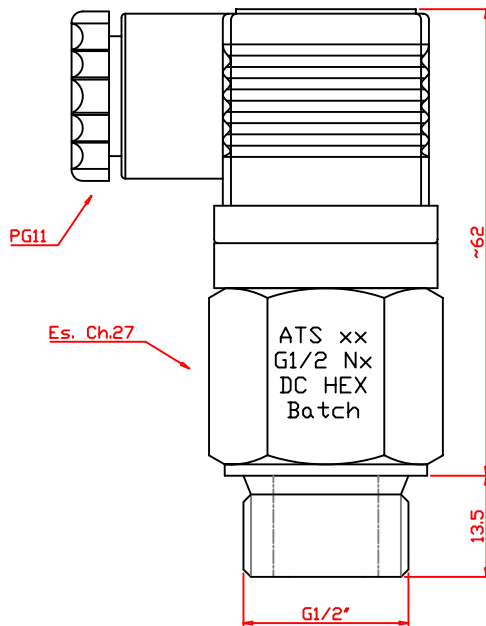

ELECTRICAL
CONNECTION



TECHNICAL DATA	
Working Power	230V AC - 6A (resist.)
Set up temperature	See table 1
Tolerance	+/-4 °C
Hysteresys	~15°C
Electrical contact	See table 1
Electrical protection	IP65
Enviromental	-20 +110°C

MATERIALS	
Electrical contact	Silver
HOUSING	BRASS

Table 1		
598262	ATS-38-G1/2-NO-DC-HEX	38°C NO
598261	ATS-47-G1/2-NO-DC-HEX	47°C NO
5982625	ATS-55-G1/2-NO-DC-HEX	55°C NO
598263	ATS-60-G1/2-NO-DC-HEX	60°C NO
598264	ATS-70-G1/2-NO-DC-HEX	70°C NO
598265	ATS-80-G1/2-NO-DC-HEX	80°C NO
598266	ATS-90-G1/2-NO-DC-HEX	90°C NO
598276	ATS-90-G1/2-NC-DC-HEX	90°C NC

Scala	Quote espresse in mm
1:1	Ove non indicato, considerare tolleranza +/-0.1 mm

REV	Descrizione modifica		Disegnato	Controllato/Approvato	Data
0					20-09-2013