


SZYBKOZŁĄCZA 62..RP

Materiał: Stal ocynkowana

Uszczelnienia: Standardowo NBR

Temperatura pracy: od -25°C do 100°C (uszczelka NBR)

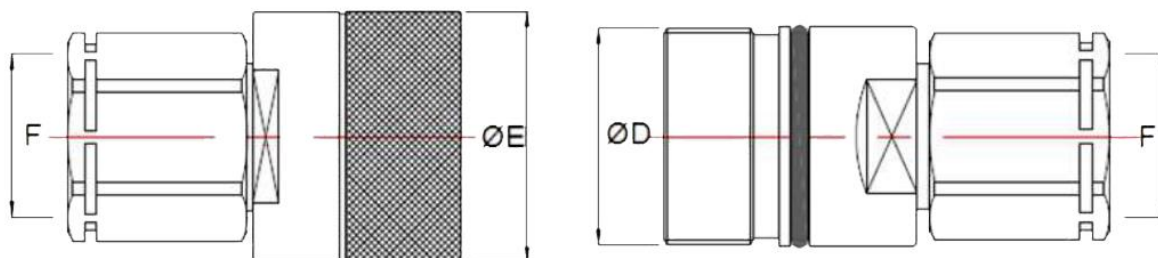

62C-RP

62N-RP

Gniazdo	Wtyk	DN	F (BSP)	ØE	D	MWP (bar)
62C44RP	62N44RP	6	1/4"	35	M24x2	450
62C64RP	62N64RP	10	1/4"	34	M28x2	400
62C66RP	62N66RP	10	3/8"	34	M28x2	400
62C86RP	62N86RP	13	3/8"	42	M36x2	400
62C88RP	62N88RP	13	1/2"	42	M36x2	400
62C1208RP	62N1208RP	20	1/2"	47,5	M42x2	300
62C1212RP	62N1212RP	20	3/4"	47,5	M42x2	300
62C1612RP	62N1612RP	25	3/4"	55(HEX)	M48x3	300
62C1616RP	62N1616RP	25	1"	55(HEX)	M48x3	300
62C2020RP	62N2020RP	32	1.1/4"	80(HEX)	M70x3	300

MWP = Maksymalne ciśnienie robocze