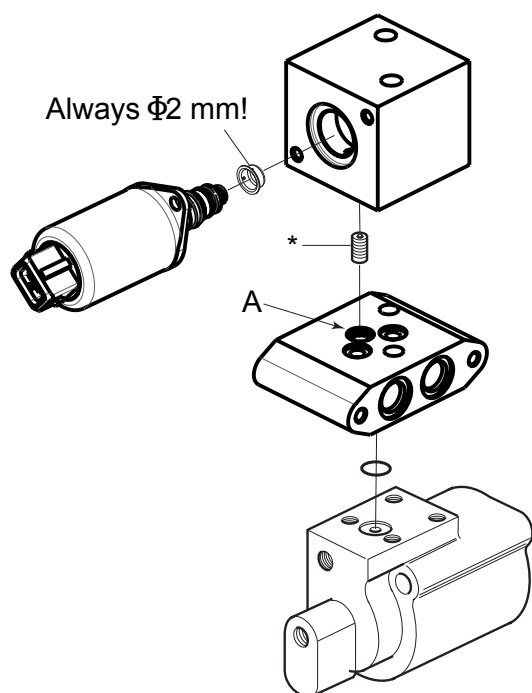


Spool controls EPS1, EPS2

Solenoid PS25 for valve HV08 always assembled with restrictor $\Phi 2.0$ mm! (PS25 as spare part is always delivered with restrictor $\Phi 2.0$ mm.)

* Damping restrictors for spool controls EPS1 and EPS2 to be mounted on the connection list (site A). They may be selected acc. to Customer specification EPS.

At "X" in the Customer specification mounted not a damping restrictor!