



INSTALLATION DETAILS FOR INDICATORS

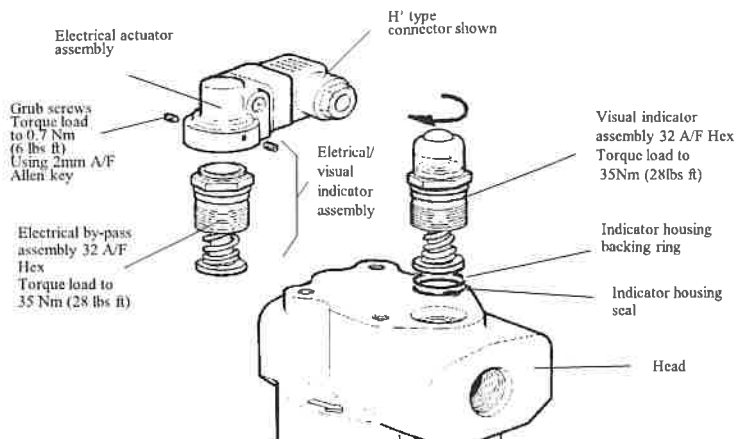

Torque load of 35 Nm (28 lbs ft) also applies to non indicating by-pass unit

ELECTRICAL/VISUAL & ELECTRICAL INDICATORS

Wiring Diagrams for connector types: 'H', 'C', 'E'

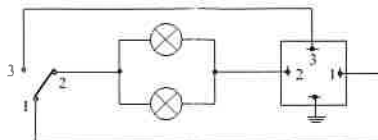

Plug connections	Pin code
Common live in	1
Normally closed	2
Normally open	3

Voltage options

Electrical Connector Type	Suitable for Industrial Applications	Voltage options
		H 250 volts A.C. 0.5 amp inductive, 2 amps resistive
		C 110 volts A.C. 0.5 amp inductive, 2 amps resistive
		E 28 volts A.C. 1 amp inductive, 3 amps resistive

20121



**PARKER HANNIFIN
MANUFACTURING FINLAND OY**

Salmentie 260, FI-31700 Urjala as. Finland
Telephone: +358 20 753 2500 Email: orders.urjala@parker.com