
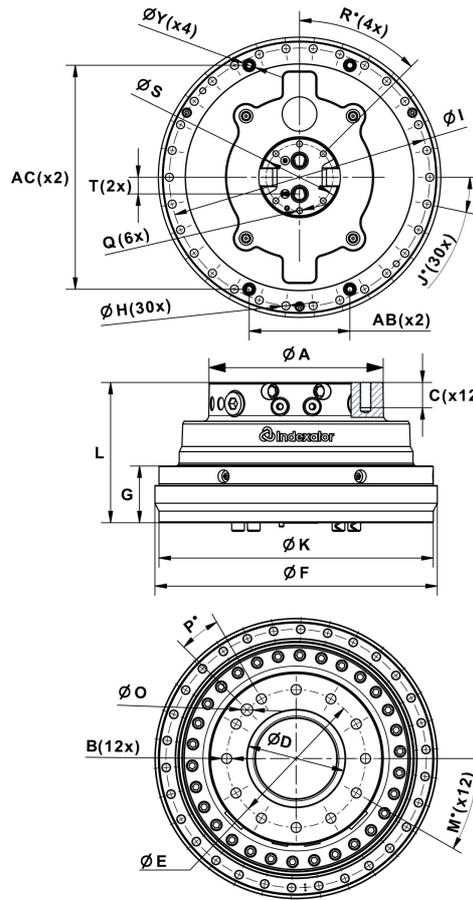


XR 400 I

Part No.: 8400009

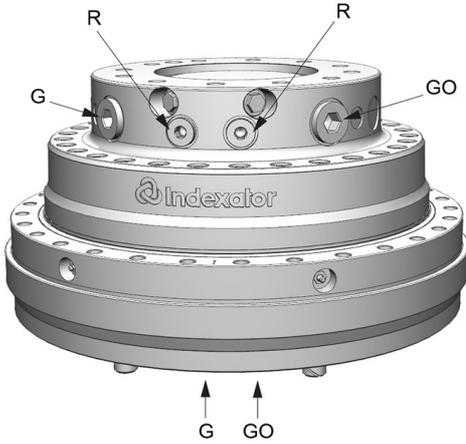

Upper

GG0:	R:
G1	G 1/2

A:	AB:	AC:	B:	C:	D:	E:	F:	G:	H:	I:	J:	K:	L:
Ø300 mm	174 mm	390 mm	M20	44 mm	Ø170 mm	Ø240 mm	Ø488 mm	99 mm	Ø14 mm	Ø450 mm	12°	Ø474 mm	244 mm
M:	Q:	P:	Q:	R:	S:	T:	Y:						
30°	Ø20 mm	15°	M12	45°	Ø116 mm	29 mm	Ø22 mm						

185 kg	360°	±550 kN ¹	±200 kN	±140 kN	±47 kNm ²	4100 Nm	35 l/min	25 MPa	40 MPa	40 MPa

¹ Max axial load static indicate theoretical max load for hanging applications without accelerations.

² The bending moment may not be combined with axial load.

Rotator modified for mounting, part number 8000 775.

Pressure limiting valves fitted in the motor.

Can be supplemented with hose guard.

Oil distributor ordered separately.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com