




Tie rods, Brackets

Tie rods, brackets, intersection seals, A266

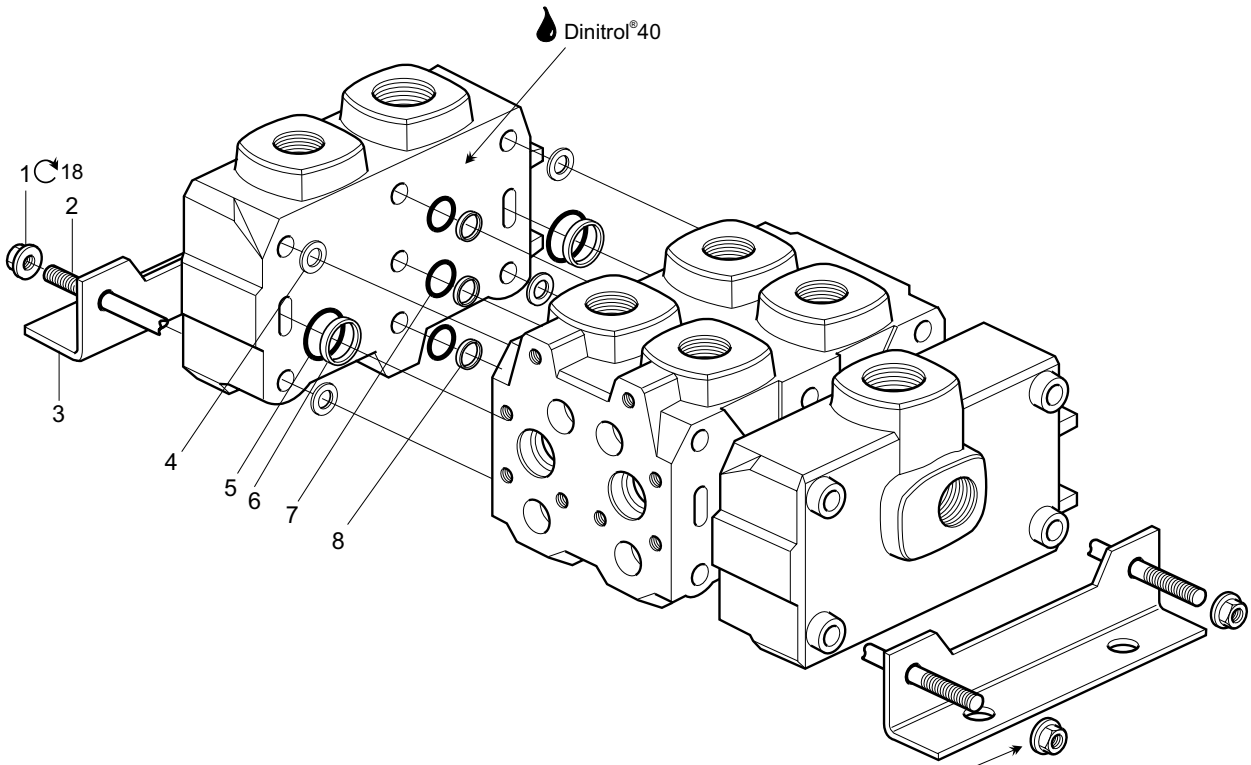

To be tightened in 2 steps: 10-12 Nm, 18 Nm

- | | | | |
|------------|-----|-------|-----|
| ○ 4 | ○ 2 | ○ 4 | ○ 2 |
| ○ 1 | ○ 3 | ○ 1 | ○ 3 |
| 10 - 12 Nm | | 18 Nm | |

 = Lubricant/Corrosion preventative
 = Tightening torque in Nm

