


Axialkolben-Verstellpumpe AA10VG Baureihe 10

Americas

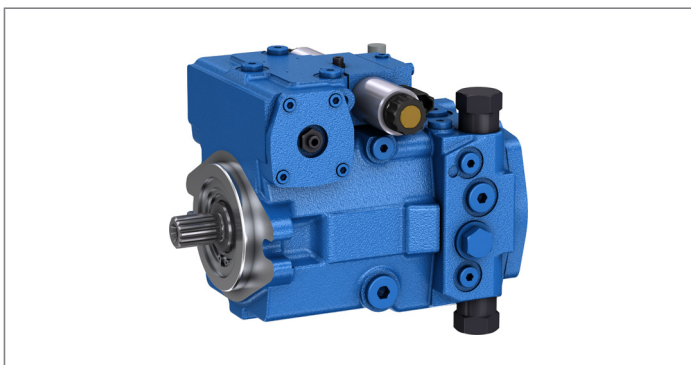

- ▶ Medium pressure pump for closed-circuit applications
- ▶ Sizes 28 to 63
- ▶ Nominal pressure 4350 psi (300 bar)
- ▶ Maximum pressure 5100 psi (350 bar)

Features

- ▶ Integrated boost pump for boost and pilot oil supply
- ▶ Flow direction changes when the swashplate is moved through the neutral position
- ▶ High-pressure relief valves with integrated boost function
- ▶ Boost-pressure relief valve
- ▶ Through drive for mounting of further pumps up to same size
- ▶ Pressure cut-off option available
- ▶ Large variety of controls
- ▶ Swashplate design

Contents

Type code	2
Hydraulic fluids	5
Working pressure range	7
Technical data	9
HD – Proportional control, hydr., pilot-pressure related	11
HW – Proportional control, hydraulic, mechanical servo	13
DA – Automatic control, speed related	15
DG – Hydraulic control, direct operated	18
EP – Proportional control, electric	19
EZ – Two-point control, electric	21
Dimensions, size 28	22
Dimensions, size 45	26
Dimensions, size 63	30
Dimensions of through drive	34
Overview of mounting options	40
Combination pumps A10VG + A10VG	41
High-pressure relief valves	42
Pressure cut-off	44
Mechanical stroke limiter	45
Measuring ports M_A , M_B , M_H	46
Filtration in the boost pump suction line	47
Filtration in the boost pump pressure line	48
External boost pressure supply	49
Connector for solenoids	50
Rotary inch valve	51
Flushing valve	52
Installation dimensions for coupling assembly	53
Installation instructions	54
Project planning notes	57
Safety instructions	58
Related documentation	59

Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22
A10V	G								/	10		–	N		C						

Axial piston unit

01	Swashplate design, variable, nominal pressure 4350 psi (300 bar), maximum pressure 5100 psi (350 bar) , ANSI	AA10V
----	--	-------

Operating mode

02	Pump, closed circuit	G
----	----------------------	---

Size (NG)

03	Geometric displacement, see "Technical data" on page 9	28	45	63
----	--	----	----	----

Control device

			28	45	63	
04	Proportional control, hydraulic	pilot-pressure related, with inlet filtration in P and X₁/X₂	•	•	•	HD3
		mechanical servo	•	•	•	HW
	Automatic control	speed-related ¹⁾	<i>U</i> = 12 V		•	DA1
			<i>U</i> = 24 V		•	DA2
	Hydraulic control	direct operated	•	•	•	DG
	Proportional control, electric	with proportional solenoid with inlet filtration in P and X₁/X₂	<i>U</i> = 12 V		•	EP3
			<i>U</i> = 24 V		•	EP4
	Two-point control, electric	with switching solenoid	<i>U</i> = 12 V		•	EZ1
			<i>U</i> = 24 V		•	EZ2

Pressure cut-off

		28	45	63	
05	Without pressure cut-off (without code)	•	•	•	
	Pressure cut-off	•	•	•	D

Neutral position switch

		28	45	63	
06	Without neutral position switch (without code)	•	•	•	
	Neutral position switch with DEUTSCH connector (only for HW control)	•	•	•	L

Mechanical stroke limiter²⁾

		28	45	63	
07	Without mechanical stroke limiter (without code)	•	•	•	
	Mechanical stroke limiter, externally adjustable	–	•	•	M

Stroking chamber pressure port

		28	45	63	
08	Without stroking chamber pressure port X₃ , X₄ (without code)	•	•	•	

DA control valve

		HD	HW	DA	DG	EP	EZ	
09	Without DA control valve	•	•	–	•	•	•	1
	DA control valve, fixed setting	•	•	•	•	•	–	2
	DA control valve, mechanically adjustable, with position lever	•	•	•	•	•	–	3L
				•	•	•	–	3R
	DA control valve, fixed setting, ports for pilot control device	•	•	•	–	•	–	7
	DA control valve, fixed setting and hydraulic inch valve mounted, control with mineral oil-based hydraulic fluid	–	–	•	–	–	–	8

Series

10	Series 1, index 0	10
----	-------------------	----

• = Available ○ = On request – = Not available = Preferred program

¹⁾ Only possible in combination with pressure cut-off (DA.D...)
²⁾ Not available in combination with DG control device

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22
A10V	G								/	10		-	N		C						

Direction of rotation																		28	45	63	
11	Viewed on drive shaft										clockwise							•	•	•	R
											counter-clockwise							•	•	•	L

Sealing material																		28	45	63	
12	NBR (nitrile rubber), shaft seal made of FKM (fluorocarbon rubber)																	•	•	•	N

Drive shaft																		28	45	63	
13	Splined shaft ANSI B92.1a-1976										for single pump							•	•	•	S
											for combination pump							•	•	•	T

Mounting flange																		28	45	63	
14	SAE J744										2-hole							•	•	•	C

Working port (port plate)									
15	Port thread: ANSI with O-ring seal based on ISO 11926								
	Fastening thread at the SAE working port and through drive: UN thread according to ASME B1.1								
	SAE working port A and B , same side left				suction port S bottom				
	Port and working port thread: ANSI with O-ring seal based on ISO 11926								
	Fastening thread at the through drive: UN thread according to ASME B1.1								
	Threaded port A and B , same side left				suction port S bottom				

Boost pump																		28	45	63	
16	Without integrated boost pump										without through drive							•	•	•	N
											with through drive							•	•	•	K
	Integrated boost pump										with and without through drive							•	•	•	F

Through drive ³⁾																		28	45	63	
17	Without through drive, only for version N and F (position 16)																	•	•	•	00
	Flange SAE J744										Hub for splined shaft ⁴⁾										
	82-2 (A)										5/8 in 9T 16/32DP							•	•	•	01
	101-2 (B)										7/8 in 13T 16/32DP							•	•	•	02
											1 in 15T 16/32DP							•	•	•	04
	127-2 (C)										1 1/4 in 14T 12/24DP							-	-	•	07

High-pressure relief valve		Setting range Δp_{HD}		28	45	63	
18	High-pressure relief valve direct operated, fixed setting	3600 ... 4650 psi	without bypass	●	●	●	3
		(250 ... 320 bar)	with bypass	●	●	●	5
		1450 ... 3600 psi	without bypass	●	●	●	4
		(100 ... 250 bar)	with bypass	●	●	●	6

Filtration boost circuit/external boost pressure supply																		28	45	63	
19	Filtration in the boost pump suction line																	•	•	•	S
	Filtration in the boost pump pressure line																	• ⁵⁾	• ⁵⁾	•	D
	Ports for external boost circuit filtration (F_e and G (F_a))																	•	•	•	E
	External boost pressure supply (on version without integrated boost pump N and K)																	•	•	•	E

• = Available ○ = On request - = Not available  = Preferred program

³⁾ Specifications for version with integrated boost pump, please contact us for version without boost pump
⁴⁾ Hub for splined shaft according to ANSI B92.1a-1976 (drive shaft allocation according to SAE J744)
⁵⁾ Pressure filtration is not possible in connection with DA control valve

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
A10V	G								/	10		–	N		C							
Connector for solenoids ⁶⁾																			28	63		
20	Without connector (without code), only with purely hydraulic controls																		•	•	•	
	DEUTSCH molded connector, 2-pin, without suppressor diode																		•	•	•	P
	DT04-2P with suppressor diode (only for EZ and DA switching solenoid)																		•	•	•	Q
Flushing valve																			28	63		
21	Without flushing valve (without code)																		•	•	•	
	Flushing valve SAE connecting overview, inch mounting																		•	•	•	2
	inch threaded ports																		•	•	•	4
Standard/special version																						
22	Standard version (without code)																					-0
	Special version																					-S

• = Available o = On request - = Not available = Preferred program

Notice

► Note the project planning notes on page 57!

► In addition to the type code, please specify the relevant technical data when placing your order.

► Please note that not all type code combinations are available even if the individual functions are marked as available.

⁶⁾ Connector specification refers to control device, connectors for other electric components may deviate

Hydraulic fluids

The axial piston unit is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluid selection, behavior during operation as well as disposal and environmental protection should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90225: Limited technical data for operation with water-free and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFA, HFB, HFC, HFC-E).

Selection of hydraulic fluid

Bosch Rexroth evaluates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235.

Hydraulic fluids with positive evaluation in the Fluid Rating are provided in the following data sheet:

- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

The selection of hydraulic fluid shall take place so that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} ; see selection diagram).

Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ³⁾	Comment
Cold start	$v_{max} \leq 1600 \text{ cSt}$	NBR ²⁾	$\vartheta_{St} \geq -40 \text{ °F } (-40 \text{ °C})$	$t \leq 3 \text{ min}$, without load ($p \leq 725 \text{ psi } (50 \text{ bar})$), $n \leq 1000 \text{ rpm}$
		FKM	$\vartheta_{St} \geq -13 \text{ °F } (-25 \text{ °C})$	Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 25 K
Warm-up phase	$v = 1600 \dots 400 \text{ cSt}$			$t \leq 15 \text{ min}$, $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$
Permissible operating range	$v = 400 \dots 10 \text{ cSt}^{1)}$	NBR ²⁾	$\vartheta \leq +185 \text{ °F } (+85 \text{ °C})$	measured at port T
		FKM	$\vartheta \leq +230 \text{ °F } (+110 \text{ °C})$	
	$v_{opt} = 36 \dots 16 \text{ cSt}$			optimal operating viscosity and efficiency range
Short-term operation	$v_{min} = 10 \dots 7 \text{ cSt}$	NBR ²⁾	$\vartheta \leq +185 \text{ °F } (+85 \text{ °C})$	$t \leq 3 \text{ min}$, $p \leq 0.3 \times p_{nom}$, measured at port T
		FKM	$\vartheta \leq +230 \text{ °F } (+110 \text{ °C})$	

Notice


The maximum circuit temperature of +239 °F (+115 °C) must not be exceeded at the working ports **A** and **B** complying with the permissible viscosity.

1) This corresponds, e.g. on VG 46, to a temperature range of +39.2 °F to +185 °F (+4 °C to +85 °C) (see selection diagram)

2) Special version, please contact us

3) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

▼ **Selection diagram**

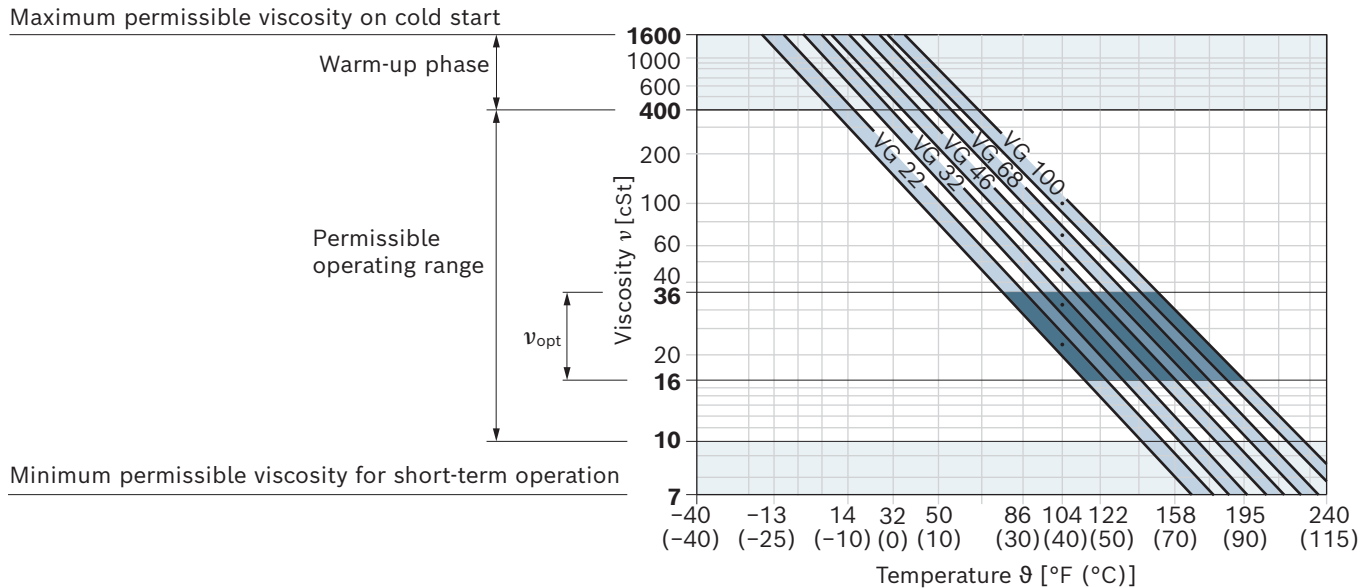

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At a hydraulic fluid viscosity of less than 10 cSt (e.g. due to high temperatures during short-term operation), a cleanliness level of at least 19/17/14 according to ISO 4406 is required.


Examples of temperatures of hydraulic fluids at a viscosity of 10 cSt:

- 163 °F (73°C) at HLP 32
- 185 °F (85°C) at HLP 46


Working pressure range

Pressure at working port A or B		Definition
Nominal pressure p_{nom}	4350 psi (300 bar)	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	5100 psi (350 bar)	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Maximum single operating period	10 s	
Total operating period	300 h	
Minimum pressure (low-pressure side)	145 psi (10 bar) above case pressure	Minimum pressure on the low-pressure side (A or B) required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	130000 psi (9000 bar/s)	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Boost pump		Definition
Nominal pressure $p_{Sp\ nom}$	365 psi (25 bar)	
Maximum pressure $p_{Sp\ max}$	580 psi (40 bar)	
Pressure at suction port S (inlet)		
Continuous $p_{S\ min}$	≥12 psi absolute (≥0.8 bar absolute)	$v \leq 30\ cSt$
Short-term, at a cold start	≥7.5 psi absolute (≥0.5 bar absolute)	$t < 3\ min$
Maximum pressure $p_{S\ max}$	≥7.5 psi absolute (≤5 bar absolute)	
Control pressure		Definition
Minimum control pressure $p_{St\ min}$ at $n = 2000\ rpm$		Required control pressure p_{St} , to ensure the function of the control. The required control pressure is dependent on rotational speed, working pressure and the spring assembly of the stroking piston.
Controls EP, EZ, HW and HD	260 psi (18 bar) above case pressure	
Controls DA and DG	365 psi (25 bar) above case pressure	
Case pressure at port T		Definition
Continuous differential pressure $\Delta p_{T\ cont}$	30 psi (2 bar)	Maximum, averaged differential pressure at the shaft seal (case to ambient pressure)
Maximum differential pressure $\Delta p_{T\ max}$	see the diagram Page 8	Permissible differential pressure at the shaft seal (case to ambient pressure)
Pressure peaks $p_{T\ peak}$	145 psi (10 bar)	$t < 0.1\ s$, maximum 1000 pressure peaks permissible


▼ **Maximum pressure $p_{\max}$ up to 5100 psi (350 bar) and total operating period**

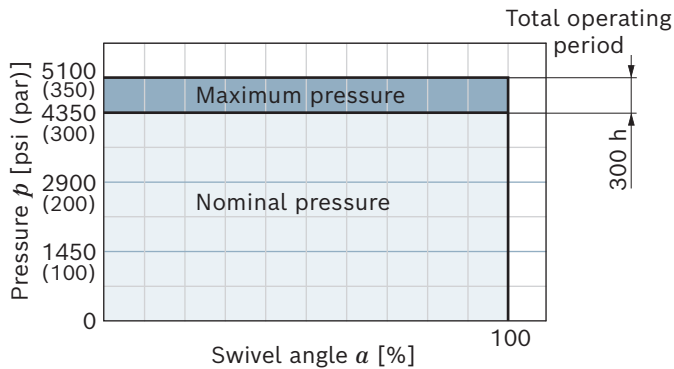


▼ **Rate of pressure change $R_{A \max}$**

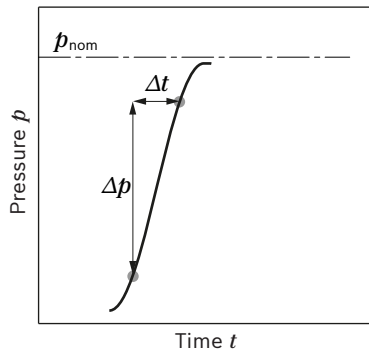

▼ **Maximum differential pressure at the shaft seal**

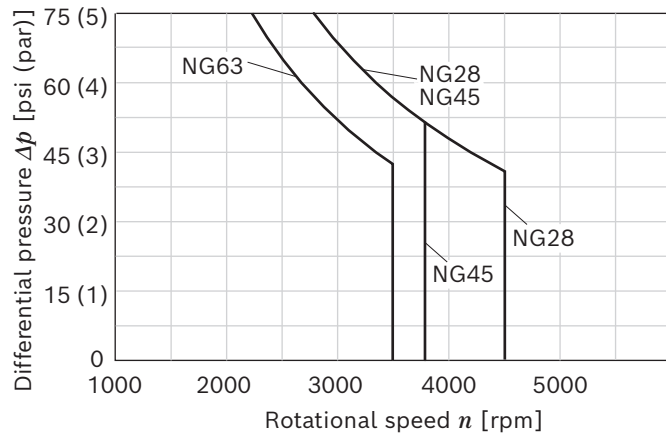

▼ **Pressure definition**

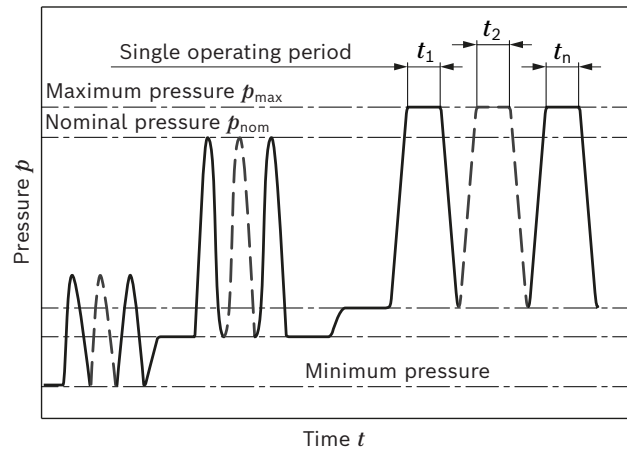

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

Notice

- ▶ Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.
- ▶ In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.
- ▶ The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure.
- ▶ The case pressure must be greater than the external pressure (ambient pressure) at the shaft seal.

Technical data

Size		NG	28	45	63
Geometric displacement, per revolution	variable pump	$V_{g \max}$ in ³	1.76	2.81	3.85
		$V_{g \max}$ cm ³	28.8	46.1	63.1
	boost pump (at $p = 290$ psi (20 bar))	$V_{g Sp}$ in ³	0.37	0.52	0.91
		$V_{g Sp}$ cm ³	6.1	8.6	14.9
Rotational speed ¹⁾	maximum at $V_{g \max}$	n_{nom} rpm	3900	3300	3000
	limited maximum ²⁾	n_{max1} rpm	4200	3550	3250
	intermittent maximum ³⁾	n_{max2} rpm	4500	3800	3500
	minimum	n_{min} rpm	500	500	500
Flow	at n_{nom} and $V_{g \max}$	q_v gpm	29.7	40.2	50
		q_v l/min	112.3	152.1	189.3
Power ⁴⁾	at n_{nom} , $V_{g \max}$ and $\Delta p = 4350$ psi	P hp	75	102	127
		P kW	56.2	76.1	94.7
Torque ⁴⁾	at $V_{g \max}$ and $\Delta p = 4350$ psi	M lb-ft	101	162	222
		M Nm	137.5	220.1	301.3
		M lb-ft	34	54	74
		M Nm	45.8	73.4	100.4
Rotary stiffness of drive shaft	S	c lb-ft/rad	23707	39388	57803
		c kNm/rad	32.14	53.40	78.37
	T	c lb-ft/rad	–	54435	68127
		c kNm/rad	–	73.80	92.37
Moment of inertia of the rotary group		J_{TW} lbs-ft ²	0.04	0.078	0.126
		J_{TW} kgm ²	0.0017	0.0033	0.0056
Maximum angular acceleration ⁵⁾		α rad/s ²	5500	4000	3300
Case volume		V gal	0.169	0.198	0.291
		V l	0.64	0.75	1.1
Weight (without through drive) approx. ⁶⁾		m lbs	55	60	86
		m kg	25	27	39

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

Determining the operating characteristics

$$\text{Flow } q_v = \frac{V_g \times n \times \eta_v}{231} \quad [\text{gpm}] \quad \left(\frac{V_g \times n \times \eta_v}{1000} \right) [\text{l/min}]$$

$$\text{Torque } M; = \frac{V_g \times \Delta p}{24 \times \pi \times \eta_{hm}} \quad [\text{lb-ft}] \quad \left(\frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}} \right) [\text{Nm}]$$

$$\text{Power } P = \frac{2 \pi \times M \times n}{33000} = \frac{q_v \times \Delta p}{1714 \times \eta_t} [\text{HP}] \quad \left(\frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p \times \eta_t}{600} \right) [\text{kW}]$$


Key

- V_g Displacement per revolution [in³ (cm³)]
- Δp Differential pressure [psi (bar)]
- n Rotational speed [rpm]
- η_v Volumetric efficiency
- η_{hm} Hydraulic-mechanical efficiency
- η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

- The values are applicable:
 - for the optimum viscosity range from $\nu_{opt} = 36$ to 16 cSt
 - for hydraulic fluid based on mineral oils (for HF hydraulic fluids, observe the technical data in 90225)
- Valid at half corner power (e.g. at $V_{g \max}$ and $p_N/2$)
- Valid at $\Delta p = 1000$ to 2200 psi ($\Delta p = 70$ to 150 bar) or $\Delta p < 4350$ psi ($\Delta p < 300$ bar) and $t < 0.1$ s
- Without boost pump

- The data are valid for values between the minimum required and maximum permissible rotational speed.
Valid for external excitation (e.g. diesel engine 2 to 8 times the rotary frequency; cardan shaft 2 times the rotary frequency).
The limit value is only valid for a single pump.
The load capacity of the connection parts must be considered.
- Weight may vary by equipment.

Permissible radial and axial loading of the drive shaft

Size	NG		28	28	45	45	63	63
Drive shaft		in	1	1 1/4	1	1 1/4	1 1/4	1 3/8
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	lbf	562	562	809	809	1124
			N	2500	2500	3600	3600	5000
	a	in	0.69	0.69	0.69	0.69	0.69	0.69
		mm	17.5	17.5	17.5	17.5	17.5	17.5
Maximum axial force		$+ F_{ax \max}$	lbf	222	222	337	337	495
			N	987	987	1500	1500	2200
		$- F_{ax \max}$	lbf	222	222	337	337	495
			N	987	987	1500	1500	2200


Notice

- The axial and radial loading generally influence the bearing service life.
- Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

Permissible input and through-drive torques

Size	NG		28	45	63
Torque at $V_{g \max}$ and $\Delta p = 4350 \text{ psi}^{1)}$	M	lb-ft	99	162	222
Torque at $V_{g \max}$ and $\Delta p = 300 \text{ bar}^{1)}$	M	Nm	134	220	301
Maximum input torque on drive shaft ²⁾ ANSI B92.1a (SAE J744)	S	$M_{E \max}$	lb-ft	232	444
			Nm	314	602
			in	1	1 1/4
	T	$M_{E \max}$	lb-ft	444	715
			Nm	602	970
			in	1 1/4	1 3/8
Maximum through-drive torque	$M_D \max$	lb-ft	162	232	324
		Nm	220	314	439

▼ Distribution of torques

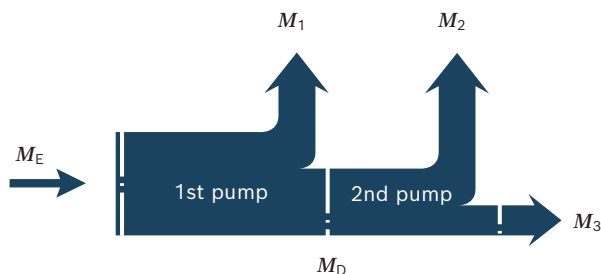

Torque at 1st pump	M_1
Torque at 2nd pump	M_2
Torque at 3rd pump	M_3
Input torque	$M_E = M_1 + M_2 + M_3$
	$M_E < M_{E \max}$
Through-drive torque	$M_D = M_1 + M_2$
	$M_D < M_{D \max}$

¹⁾ Efficiency not considered


²⁾ For drive shafts free of radial force

HD – Proportional control, hydraulic, pilot-pressure related

The output flow of the pump is infinitely variable in the range between 0 and 100%, proportional to the difference in pilot pressure applied to the two pilot signal ports (Y_1 and Y_2). The flow is reversible, depending on pilot pressure side Y_1 and Y_2 and the direction of rotation of the pump.

The pilot pressure or the pilot pressure difference acts as a setpoint value of the force on the control piston. It then directs control oil into and out of the stroking cylinder to adjust pump displacement according to the setpoint value. The mechanical feedback lever connected to the stroking cylinder closes the control circuit via a force comparison with the setpoint value of the hydraulic force. In this case, the pump swivel angle is adjusted proportionally to the current difference in pilot pressure.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

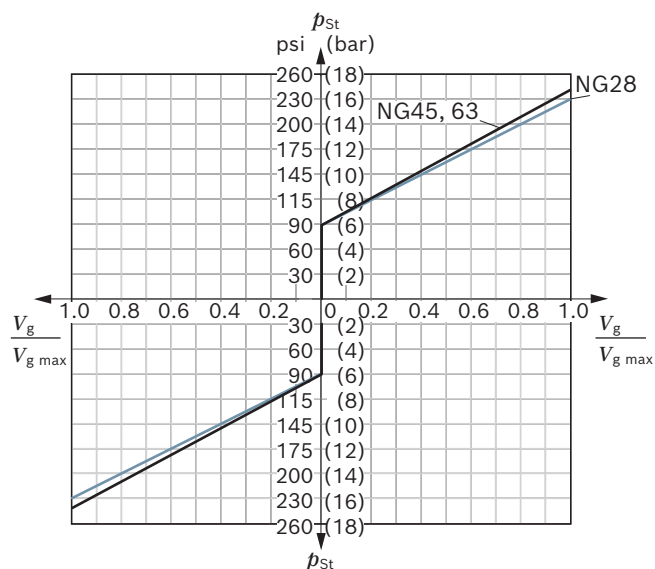

Size			28	45	63
Start of control ($V_{g\ 0}$)	p_{St}	psi	87	87	87
		bar	6	6	6
End of control ($V_{g\ max}$)	p_{St}	psi	230	242	242
		bar	16	16.7	16.7
Maximum required pilot oil volume	$q_{v\ St}$	gpm	0.1	0.1	0.1
		l/min	0.5	0.5	0.5


Key

V_g	Displacement
V_{g0}	Displacement in neutral position
V_{gmax}	Maximum displacement
p_{St}	Pilot pressure signal at port Y_1, Y_2
q_{vSt}	Maximum required pilot oil volume at port Y_1, Y_2


Notice

For exact neutral position, the pilot pressures Y_1 and Y_2 must be completely unloaded via the external control valve or the control pressure difference $Y_1 - Y_2$ must be compensated.

▼ Circuit diagram, version without pressure cut-off

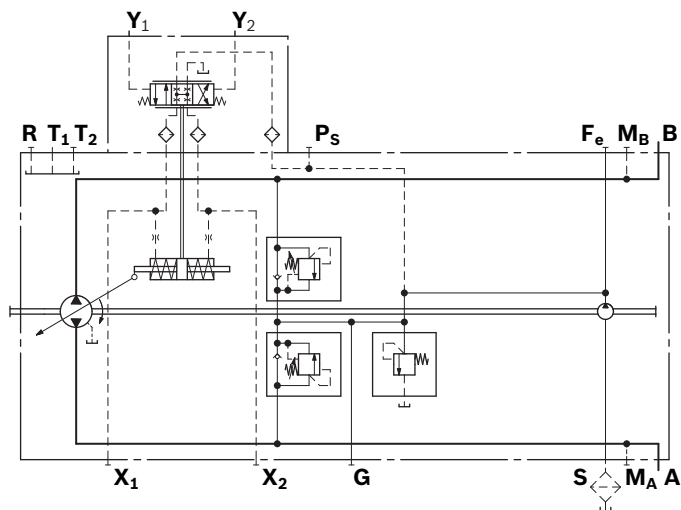


▼ Circuit diagram, version with pressure cut-off

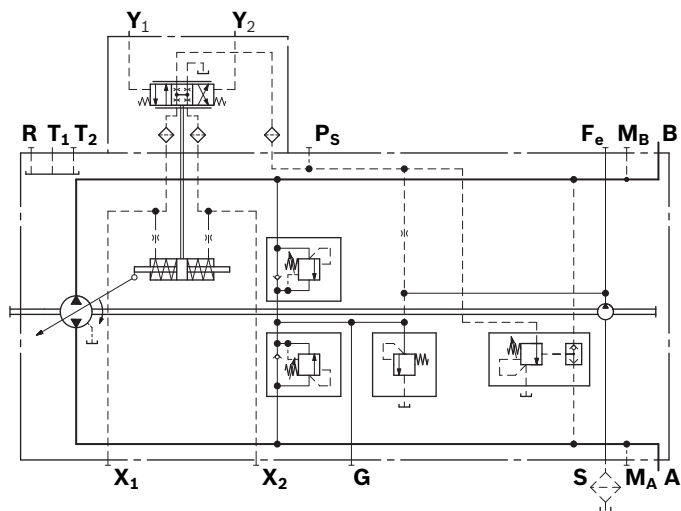

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Pilot signal	Y ₁	Y ₂	Y ₁	Y ₂
Control pressure	X ₁	X ₂	X ₁	X ₂
Flow direction	A to B	B to A	B to A	A to B
Working pressure	M _B	M _A	M _A	M _B

▼ Position of ports (example)

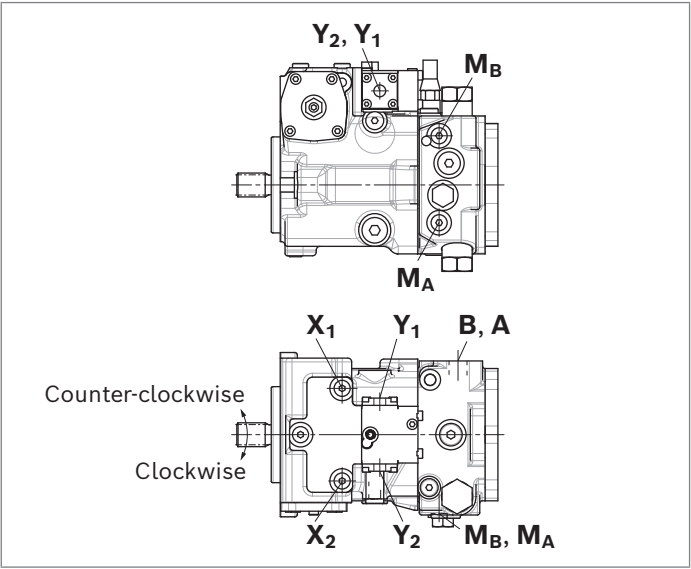


HW – Proportional control, hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the swivel angle of the control lever.

A feedback lever connected to the stroking piston maintains the pump flow for any given position of the control lever.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

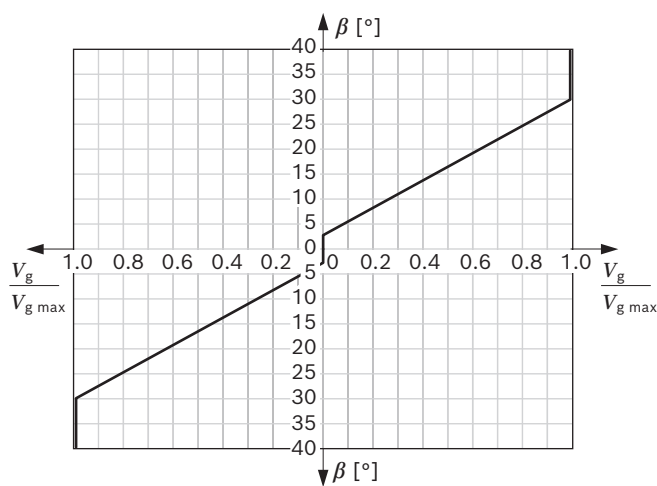

Size	28 ... 63
Start of control (V_{g0})	$\beta \pm 3^\circ$
End of control (V_{gmax})	$\beta \pm 30^\circ$
Rotational limiter control lever (internal)	$\beta \pm 38^\circ$

The maximum required torque at the control lever is 15 lb-in (170 Ncm). To prevent damage to the HW control module, a positive mechanical stop of $33^\circ \pm 1$ must be provided for the HW control lever on the customer side.

Key

V_g	Displacement
V_{g0}	Displacement in neutral position
V_{gmax}	Maximum displacement
β	Swivel angle at the control lever

Notice

- Spring-centering enables the pump, depending on pressure and rotational speed, to move automatically to the neutral position ($V_g = 0$) as soon as there is no longer any torque on the control lever of the HW control module.
- As standard delivery, the control lever is oriented toward the through drive (see dimensions).
- If necessary, the position of the control lever can be changed. The procedure is defined in the operating instructions.
- The position of the control lever can deviate from the installation drawing.


Option: Neutral position switch

The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of the central position in either direction. Thus, the neutral position switch provides a monitoring function for drive units that require the control lever at the HW control module to be in the neutral position during certain operating conditions (e.g. starting diesel engine).


Technical data

Load capacity	20 A (continuous), without switching operations
Switching capacity	15 A / 32 V (resistive load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH DT04-2P-EP04 (mating connector, see page 50)

▼ Circuit diagram, version without pressure cut-off

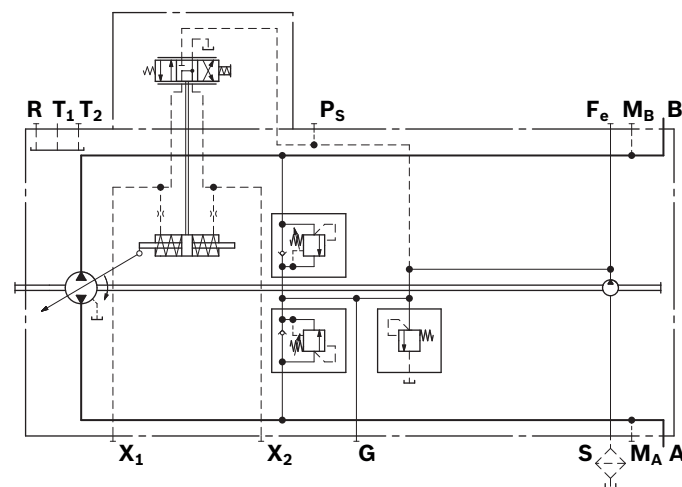


▼

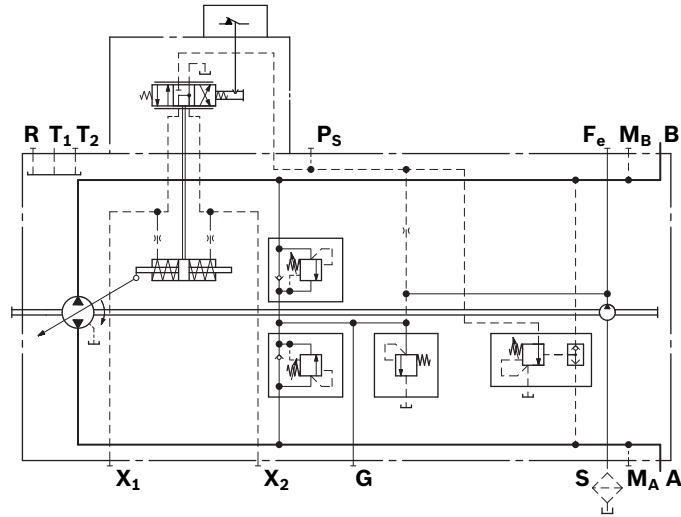

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Lever direction ¹⁾	ccw	cw	ccw	cw
Control pressure	X₂	X₁	X₂	X₁
flow direction	B to A	A to B	A to B	B to A
working pressure	M_A	M_B	M_B	M_A

▼

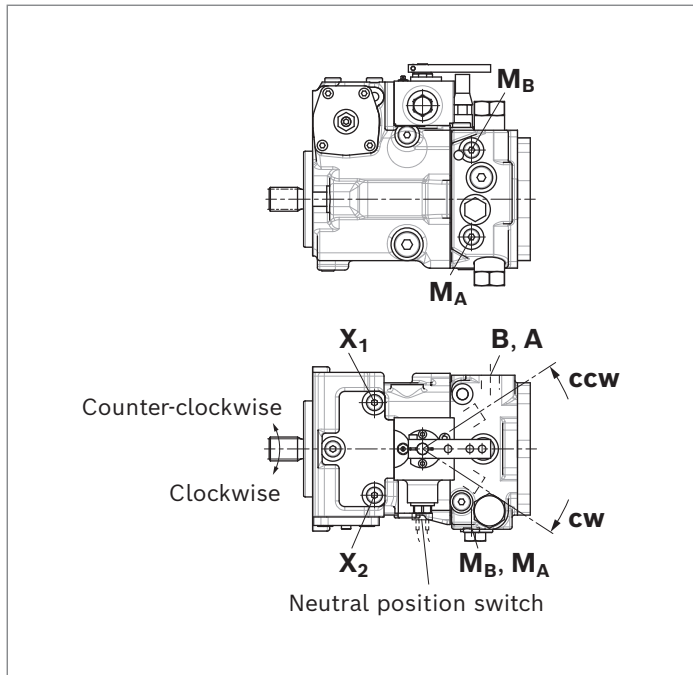

1) ccw = counterclockwise,
cw = clockwise

DA – Automatic control, speed related

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump drive speed. This pilot pressure is directed to the stroking cylinder of the pump by an electromagnetically actuated 4/3 way directional valve. The pump displacement is infinitely variable in each flow direction and is influenced by both pump drive speed and system pressure. The flow direction (e.g. the machine moving forward or backward) is determined by either solenoid **a** or **b** being activated. Increasing the pump drive speed generates a higher pilot pressure from the DA control valve, with a subsequent increase in pump flow.

Depending on the selected pump operating characteristics, increasing system pressure (e.g. machine load) causes the pump to swivel back towards a smaller displacement. An overload protection for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.

Any additional power requirement, e.g. for hydraulic functions from attachments, could cause the engine rotational speed to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics. Various override options are available for DA control function to allow controlled operation of the implement hydraulics with high rotational speeds at reduced travel speed.

The DA control valve can also be used in pumps with DG, HW, HD and EP control modules to protect the combustion engine against overload.


Notice

DA closed loop control is only suitable for certain types of travel drive systems and requires review of the motor and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

Technical data, switching solenoid	DA1	DA2
Voltage	12 V (±20%)	24 V (±20%)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g \max}$	current energized	current energized
Nominal resistance (at 68 F (20 °C))	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum required active current	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 50		

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Actuation of switching solenoid	a	b	a	b
Control pressure	X₂	X₁	X₂	X₁
Flow direction	B to A	A to B	A to B	B to A
Working pressure	M_A	M_B	M_B	M_A


▼ Position of ports (example)

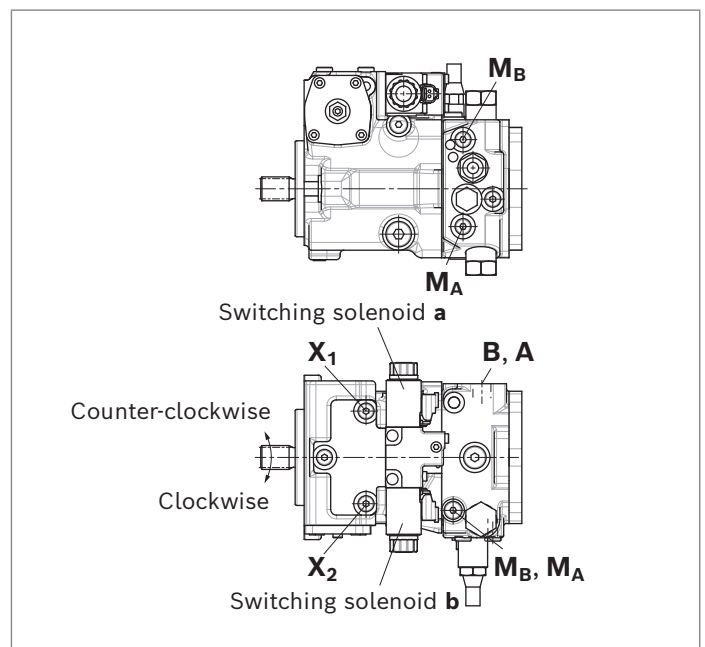

DA..2 – DA control valve, fixed setting

Pilot pressure is generated in relation to drive speed.

▼ Circuit diagram DA control valve, fixed setting, DA1D2/DA2D2¹⁾

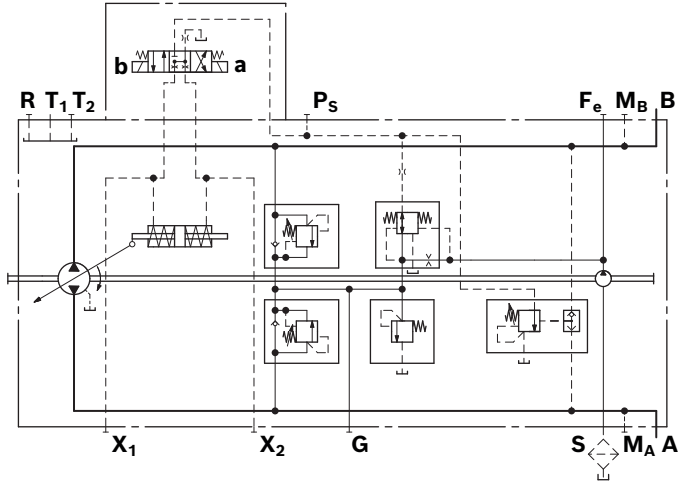

DA..3 – DA control valve, mechanically adjustable with position lever

Pilot pressure is generated in relation to drive speed.

Any desired reduction of pilot pressure, independent of drive speed, through mechanical actuation of the position lever (inch function).

The maximum permissible actuation torque at the position lever is $M_{\max} = 3 \text{ lb-ft (4 Nm)}$.

In the standard version, the position lever is configured to the control module, see dimensions.

The maximum angle of rotation is 70°.


DA..3R

Direction of actuation of the position lever: clockwise

DA..3L

Direction of actuation of the position lever: counter-clockwise

▼ Circuit diagram DA1D3/DA2D3¹⁾

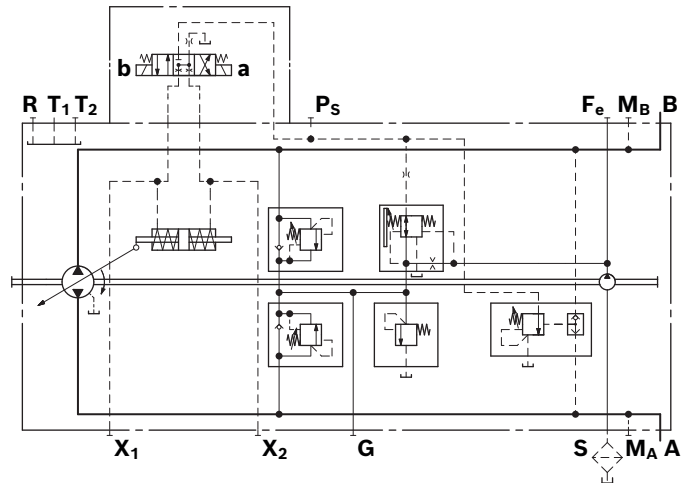

1) Size 63 with MH port

DA..7 – DA control valve, fixed setting, ports for pilot control device as inch valve


Any desired reduction of pilot pressure, independent of drive speed, is achieved by the mechanical actuation of the pilot control device.

The pilot control device is installed separately from the pump (for example in the driver's cabin) and connected to the pump by two hydraulic control lines via ports **P_S** and **Y**.

A suitable pilot control device must be ordered separately and is not included in the scope of delivery.

Notice: Rotary inch valves, see page 51.

▼ Circuit diagram DA1D7/DA2D7¹⁾

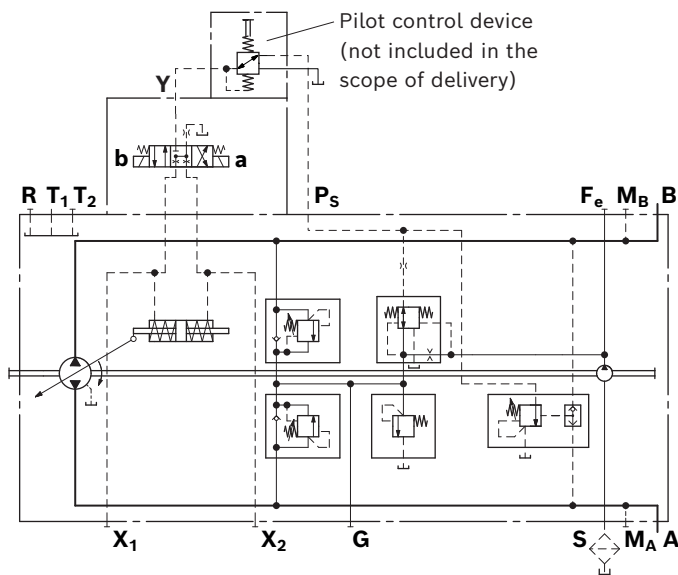

DA..8 – DA control valve, fixed setting and hydraulic inch valve mounted

Only for pumps with DA control module


Any desired reduction of pilot pressure, independent of the drive speed, hydraulically controlled (port **Z**).

The hydraulic inch valve at port **Z** is controlled with mineral oil-based hydraulic fluid.

Maximum permissible pilot pressure at port **Z**:

1150 psi (80 bar)

▼ Circuit diagram DA1D8/DA2D8¹⁾

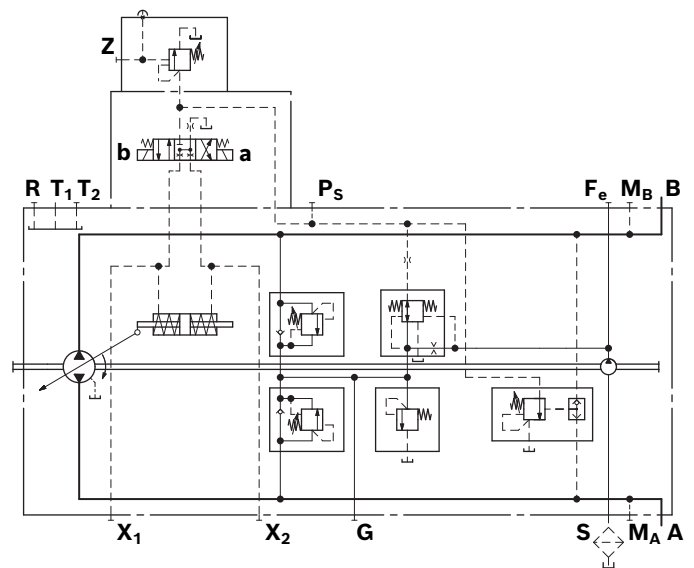


¹⁾ Size 63 with MH port


DG – Hydraulic control, direct operated

With the direct operated hydraulic control (DG), the output flow of the pump is controlled by a hydraulic control pressure, applied directly to the stroking piston through either port **X₁** or **X₂**. Flow direction is determined by which control pressure port is pressurized. Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed. In order to use the optional built-in pressure cut-off function, port **P_S** must be used for the selected control module as source of the control pressure **X₁** and **X₂** generated on the customer side. See page 42 for a functional description of the pressure cut-off. Maximum permissible control pressure: 580 psi (40 bar) Use of the DG control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all DG applications be reviewed by a Bosch Rexroth application engineer. If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

▼ Circuit diagram, version without pressure cut-off

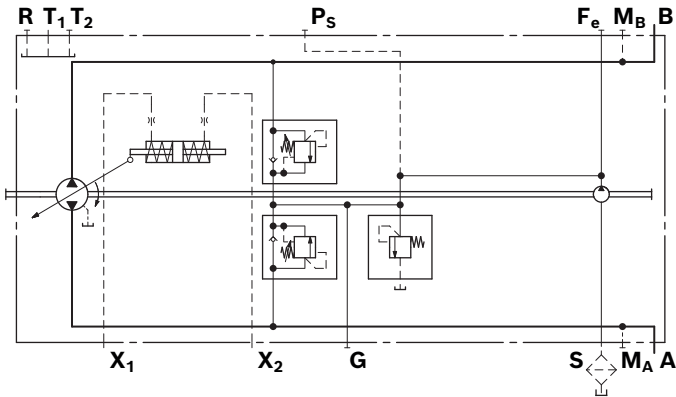


▼ Circuit diagram, version with pressure cut-off

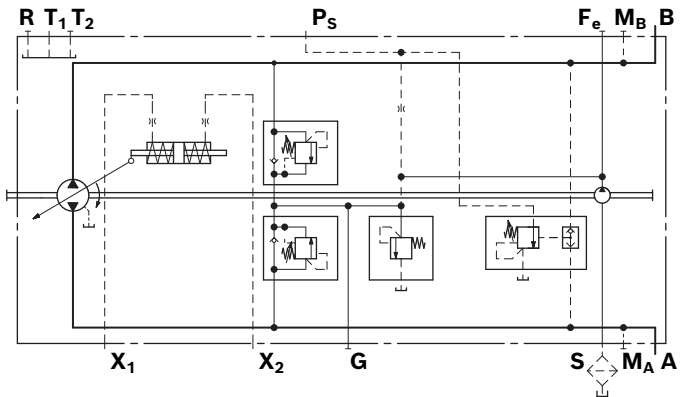

Correlation of direction of rotation, control and flow direction			
Direction of rotation	clockwise	counter-clockwise	
Control pressure	X ₁	X ₂	
Flow direction	A to B	B to A	
Working pressure	M _B	M _A	

▼ Position of ports (example)

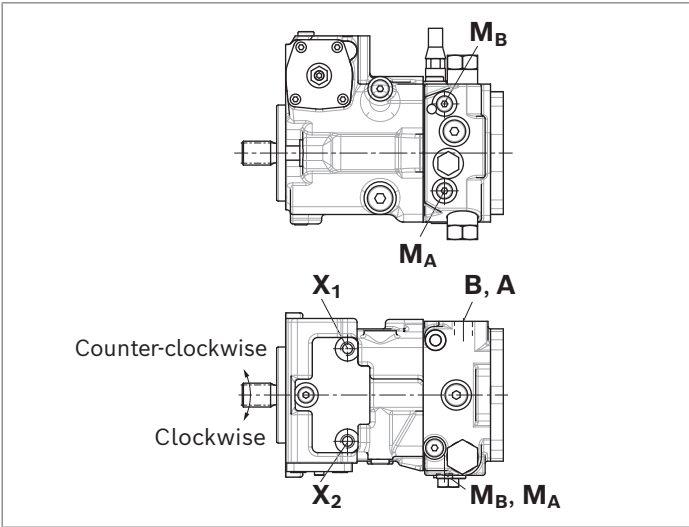


EP – Proportional control, electric

The output flow of the pump is infinitely variable in the range between 0 to 100%, proportional to the electrical current supplied to the solenoids. The flow is reversible, depending on solenoid side **a** or **b** and the direction of rotation of the pump.

The magnetic force acts as a setpoint value on the control piston. It then directs control oil into and out of the stroking cylinder to adjust pump displacement according to the setpoint value.

The mechanical feedback lever connected to the stroking piston closes the control circuit via a force comparison with the magnetic force. Here the pump swivel angle is adjusted proportionally to the current control current. If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

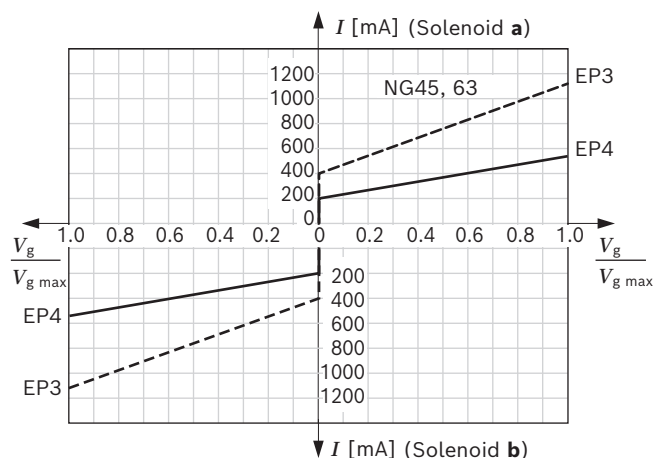

Notice

The proportional solenoids do not have manual override. Proportional solenoids with manual override and spring return are available on request.

Control current

EP3	NG	28	45	63
Start of control	mA	400	400	400
End of control	mA	1140	1115	1115
EP4	NG	28	45	63
Start of control	mA	200	200	200
End of control	mA	570	560	560


1) Minimum required oscillation range of the control current ΔI_{p-p} (peak to peak) within the respective control range (start of control to end of control)

Technical data, proportional solenoid	EP3	EP4
Voltage	12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Control current		
start of control at $V_g = 0$	400 mA	200 mA
end of control at $V_g \text{ max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 68 F (20 °C))	5.5 Ω	22.7 Ω
Dither		
frequency	100 Hz	100 Hz
minimum oscillation range ¹⁾	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 50		


Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

Further information can also be found on the Internet at www.boschrexroth.com/mobile-electronics

▼ Circuit diagram, version without pressure cut-off

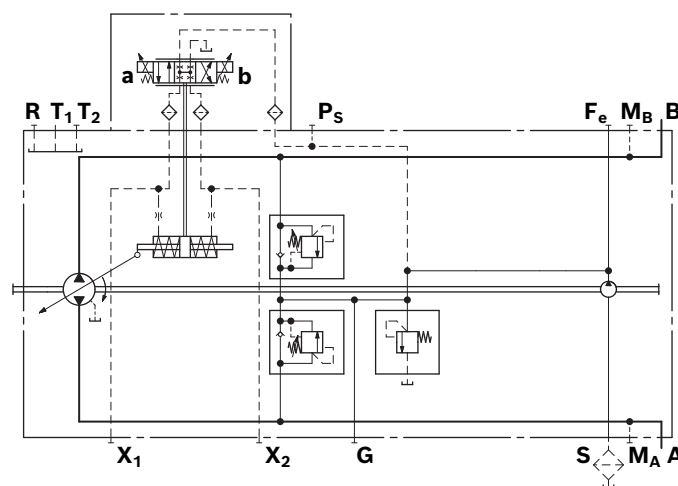


▼ Circuit diagram, version with pressure cut-off

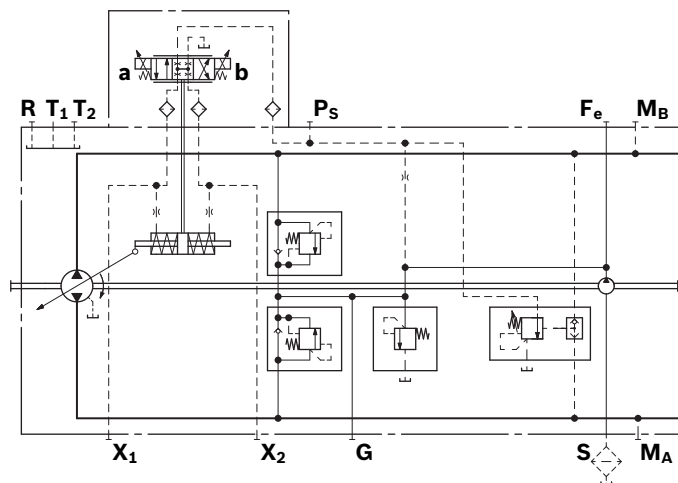

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X₁	X₂	X₁	X₂
Flow direction	A to B	B to A	B to A	A to B
Working pressure	M_B	M_A	M_A	M_B

▼ Position of ports (example)

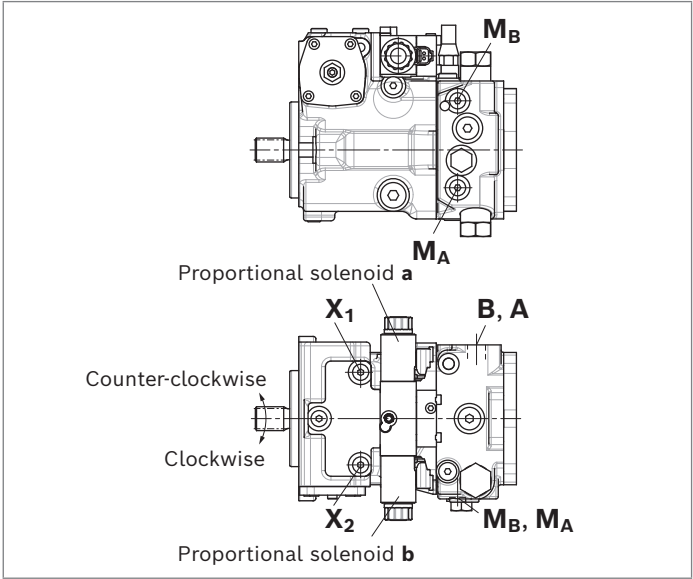


EZ – Two-point control, electric


By actuation of either switching solenoid **a** or **b**, internal control pressure is applied directly to the stroking piston of the pump, and the pump swivels to maximum displacement. The EZ control enables pump flow to be switched between $V_g = 0$ and $V_{g \max}$. Flow direction is determined by which solenoid is energized.

Technical data, switching solenoid	EZ1	EZ2
Voltage	12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g \max}$	current energized	current energized
Nominal resistance (at 68 F (20 °C))	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum required active current	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 50		

▼ Circuit diagram, version without pressure cut-off

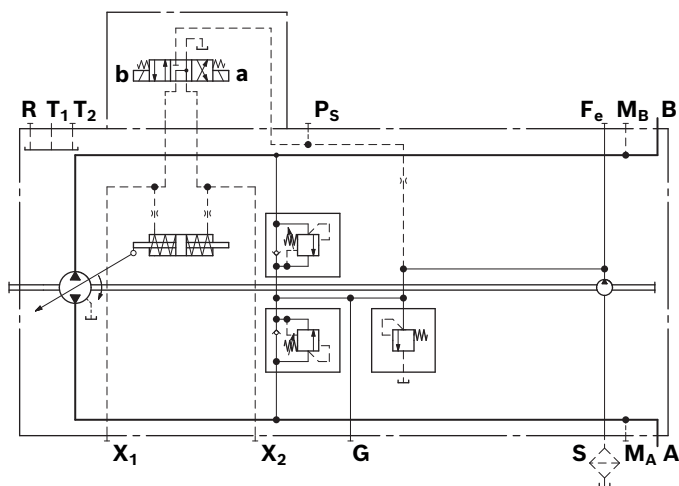


▼ Circuit diagram, version with pressure cut-off

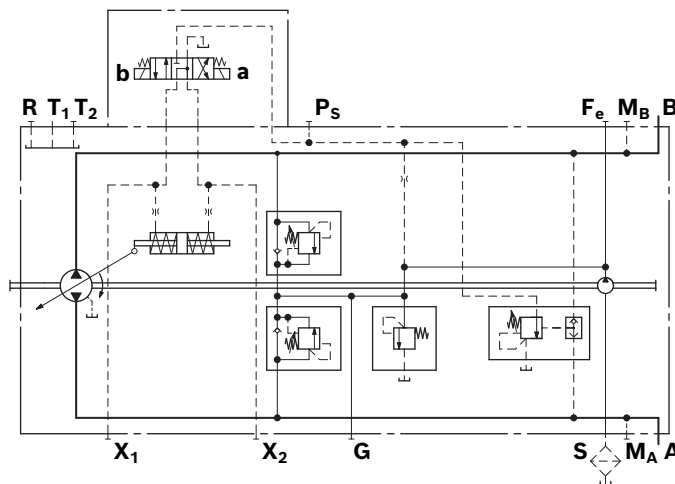

Correlation of direction of rotation, control and flow direction

Direction of rotation	clockwise		counter-clockwise	
Actuation of switching solenoid	a	b	a	b
Control pressure	X ₂	X ₁	X ₂	X ₁
Flow direction	B to A	A to B	A to B	B to A
Working pressure	M _A	M _B	M _B	M _A


▼ Position of ports (example)

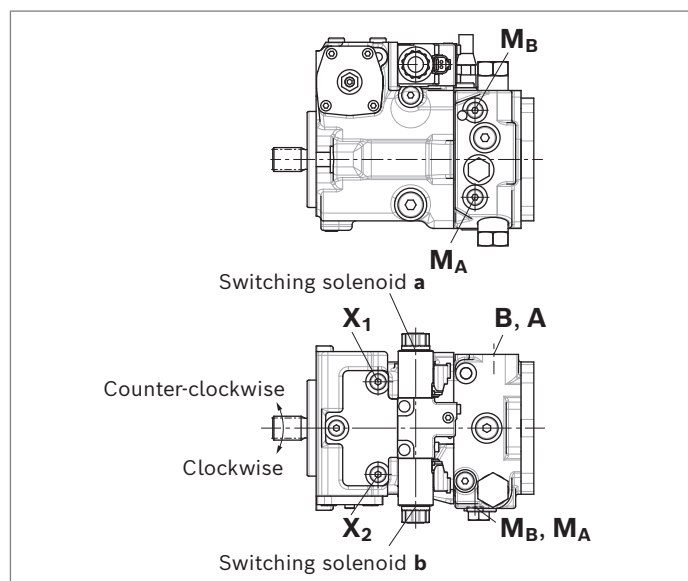


Dimensions, size 28

EP – Proportional control, electric


Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (60)

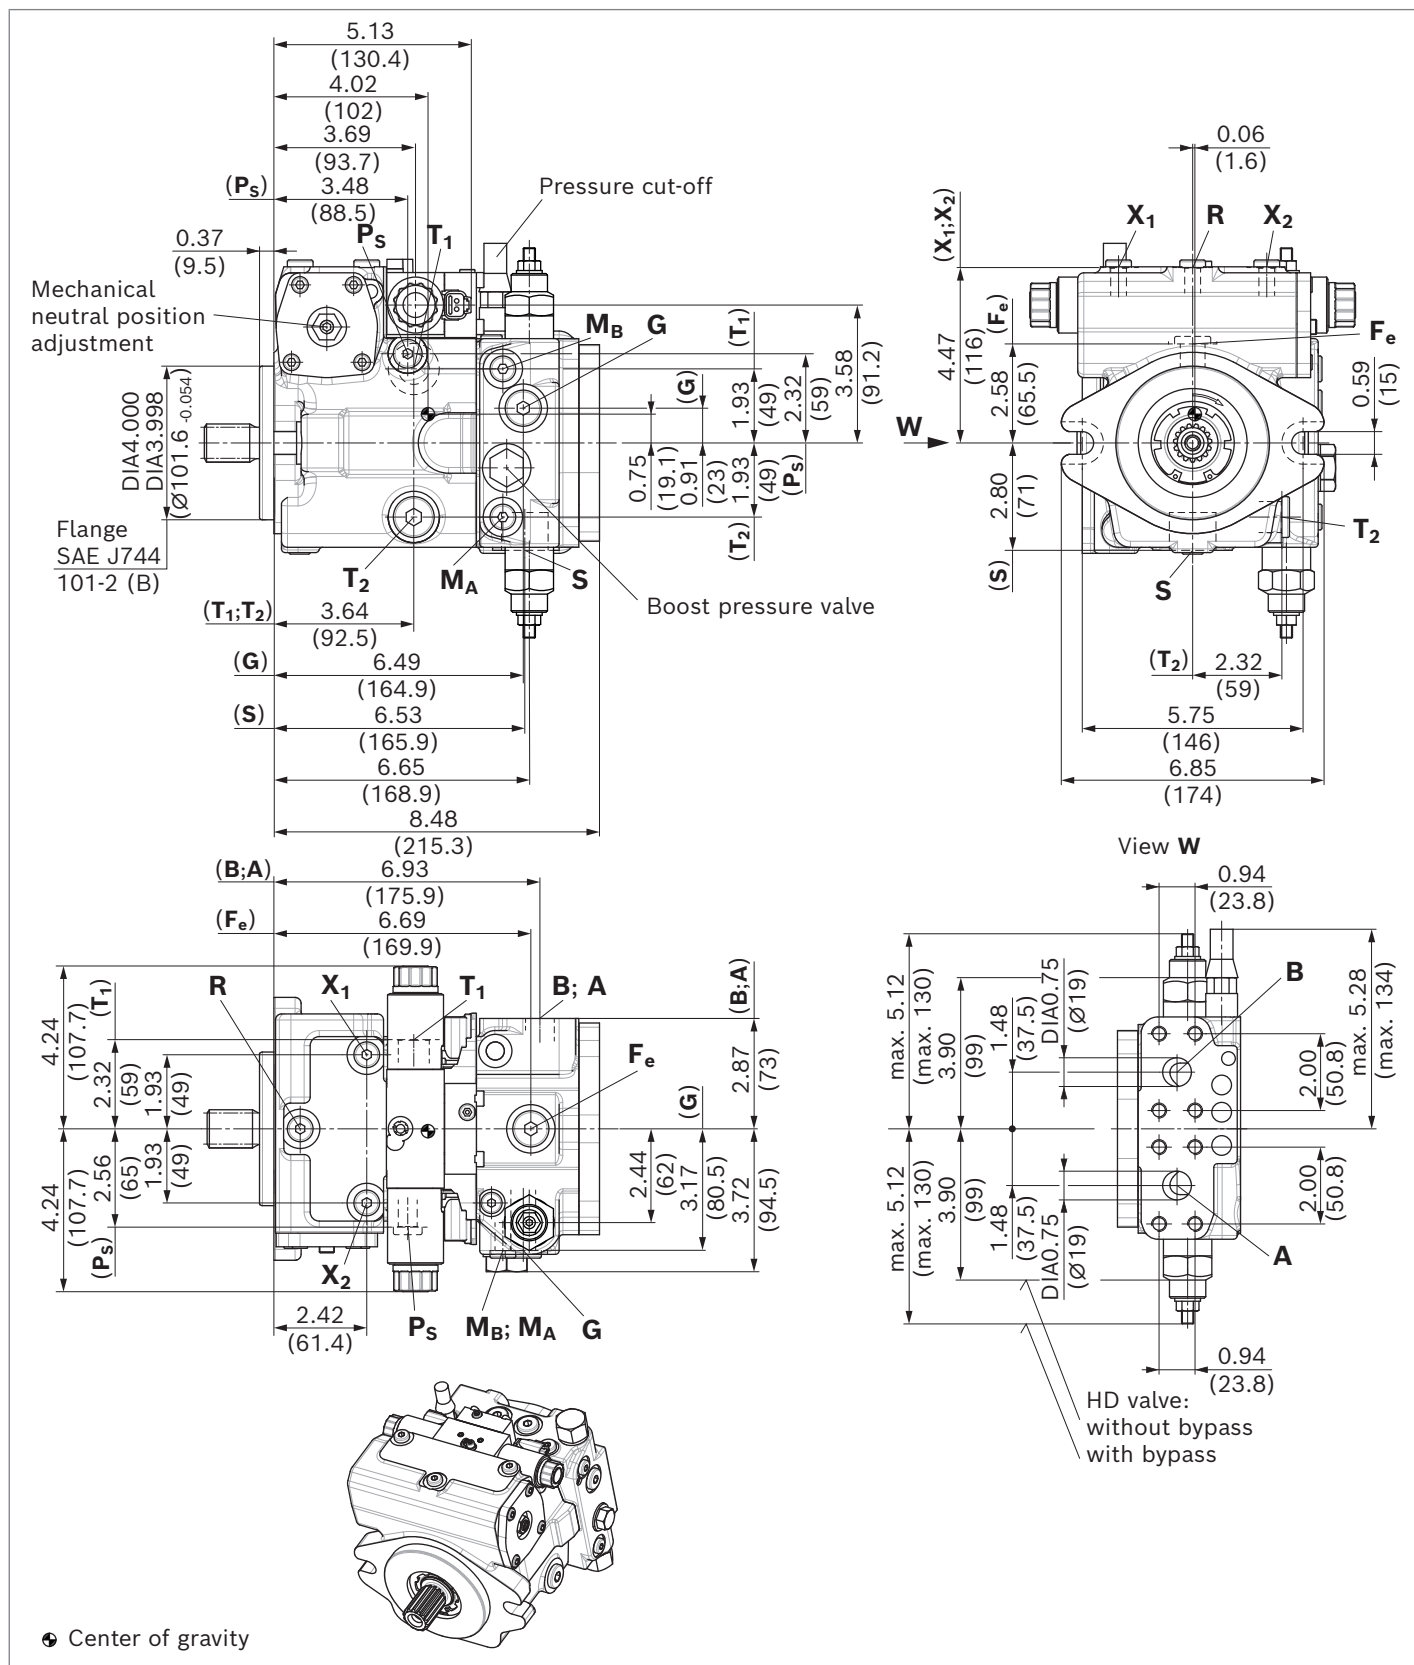

▼ Splined shaft ANSI B92.1a

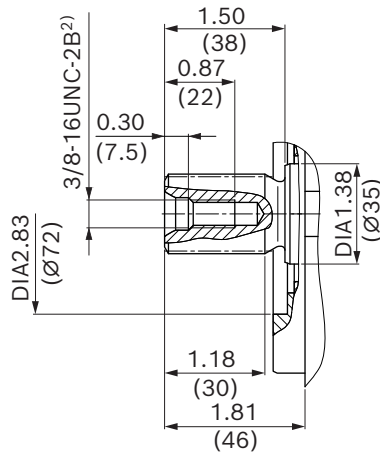S – 1 in 15T 16/32DP¹⁾

▼ Splined shaft ANSI B92.1a

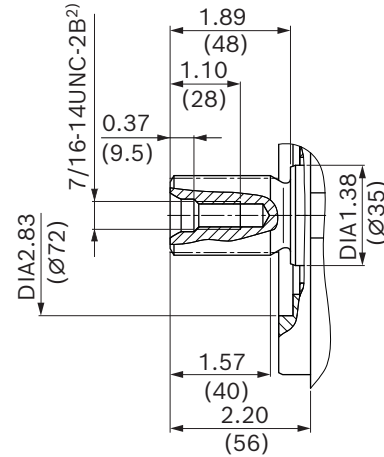T – 1 1/4 in 14T 12/24DP¹⁾

Ports		Standard	Size	$p_{\max}$ [psi (bar)] ³⁾	State ⁹⁾
A, B	Working port	SAEJ518 ⁴⁾	3/4 in	5100 (350)	O
	Fastening thread	ASME B1.1	3/8 in -16 UNC-2B; 0.67 (17) deep		
S	Suction port	ISO 11926 ⁵⁾	1 5/16 in -12 UN-2B; 0.79 (20) deep	75 (5)	O ⁷⁾
T₁	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	O ⁸⁾
T₂	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	X ⁸⁾
R	Air bleed port	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	45 (3)	X
X₁, X₂	Control pressure port (upstream of orifice)	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	580 (40)	X
G (F_a)	Boost pressure port inlet	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
G	Boost pressure port inlet (only DA control valve)	ISO 11926 ⁵⁾	3/8 in -24 UNF-2B; 0.67 (10) deep	580 (40)	X
P_S	Pilot pressure port	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	X
Y	Pilot pressure port output (only DA..7)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
M_A, M_B	Measuring port, pressure A, B	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	5100 (350)	X
F_e	Boost pressure port output	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
Y₁, Y₂	Pilot pressure port (pilot signal HD only)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
Z	Pilot pressure port (inch signal only DA..8)	DIN 3852 ⁶⁾	M10 × 1; 0.31 (8) deep	1150 (80)	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to ISO 11926-2.

6) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E


7) Plugged for external boost pressure supply.

8) Depending on installation position, **T₁** or **T₂** must be connected (see also installation instructions on page 54).


9) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

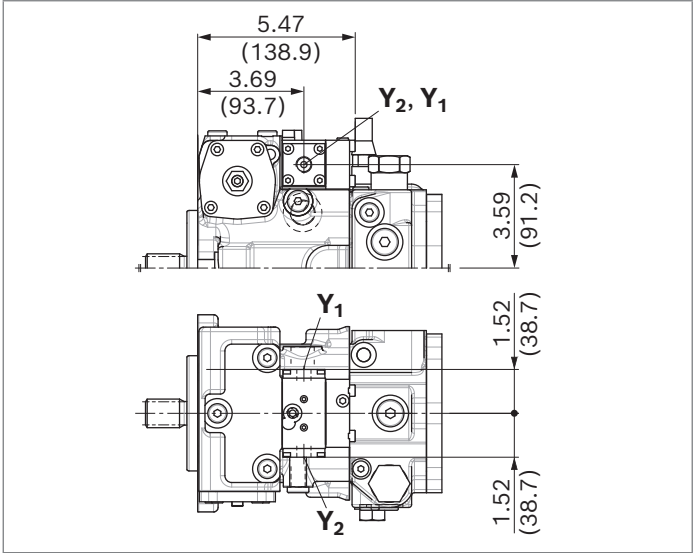


▼ **HW** – Proportional control, hydraulic, mechanical servo




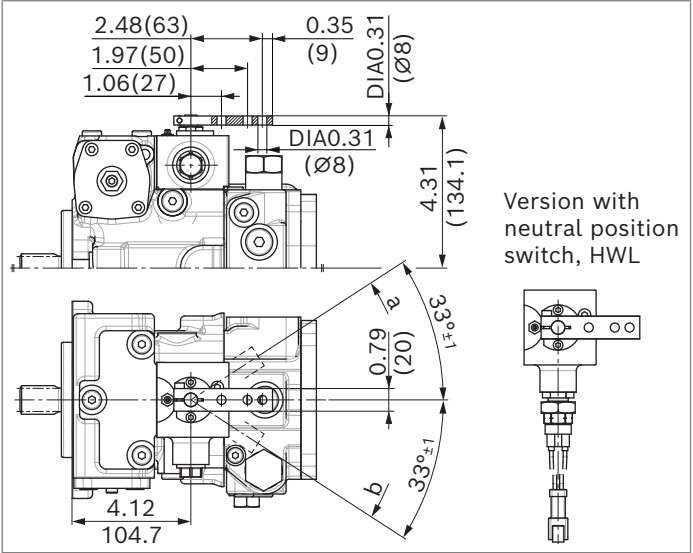


▼ **DG** – Hydraulic control, direct operated

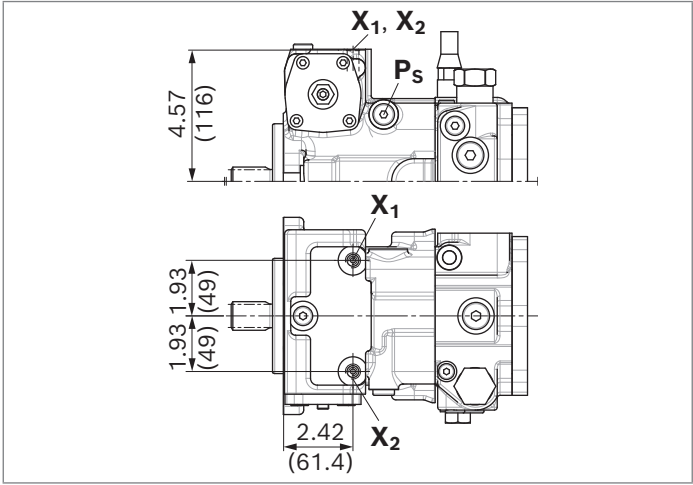

▼ **EZ** – Two-point control, electric

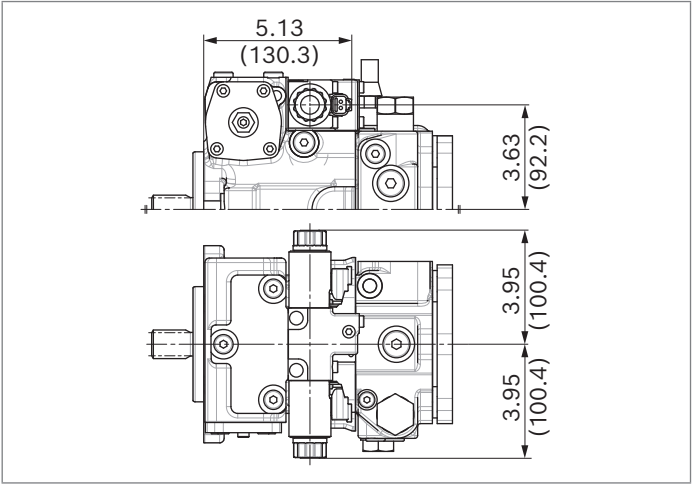


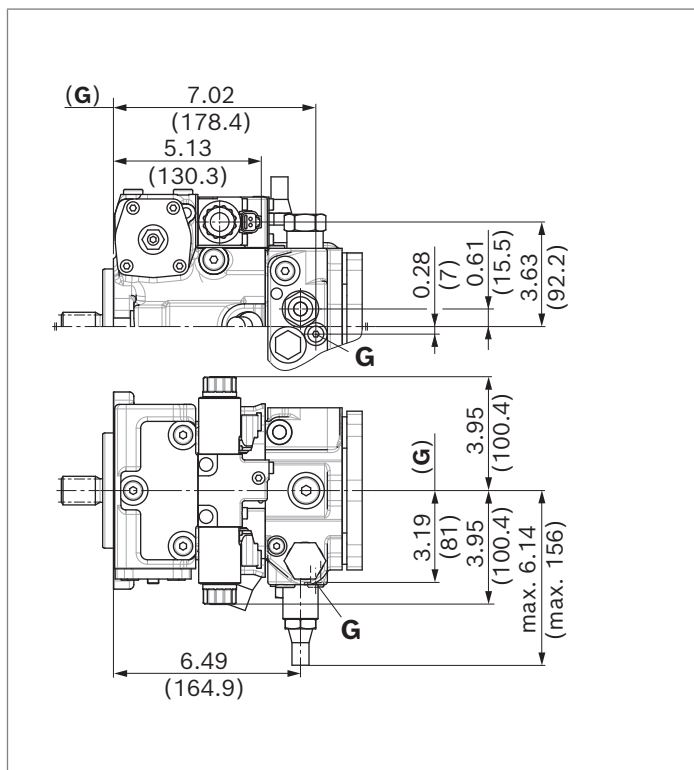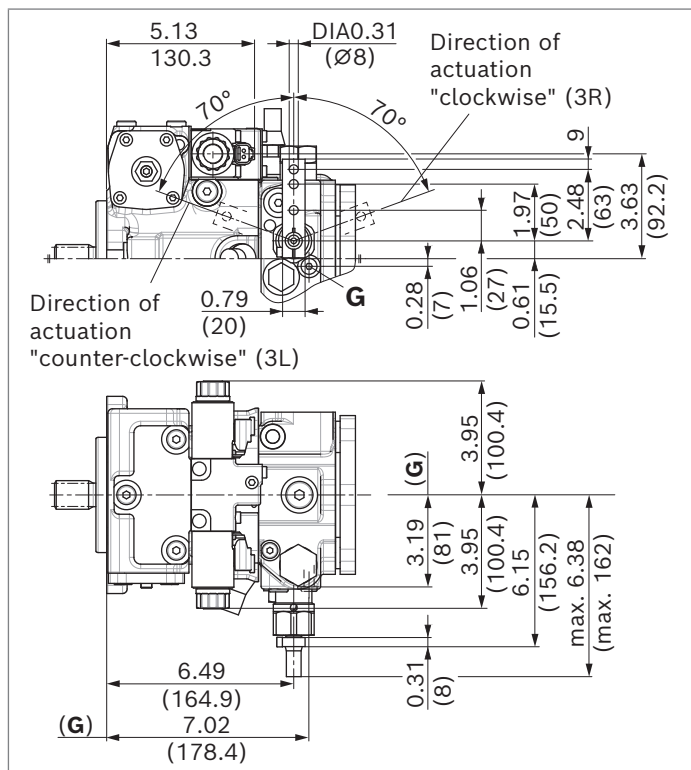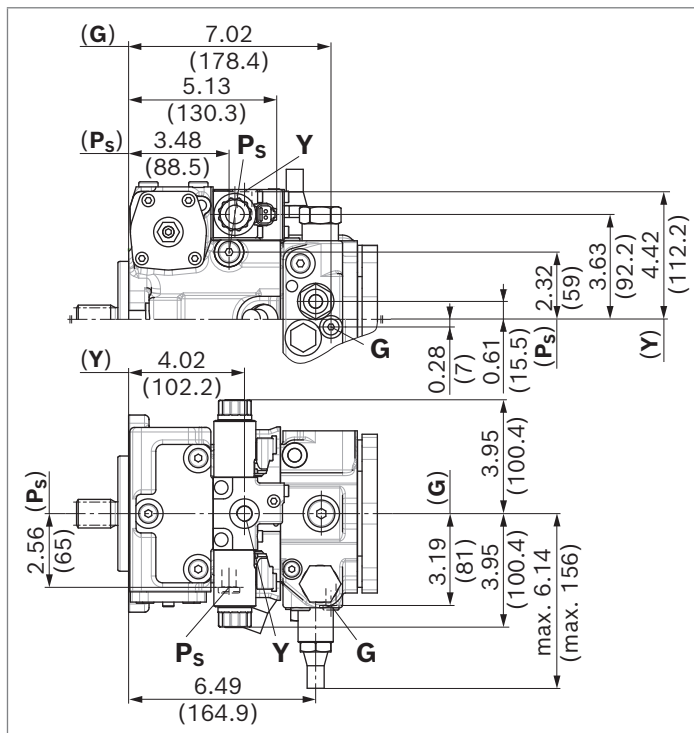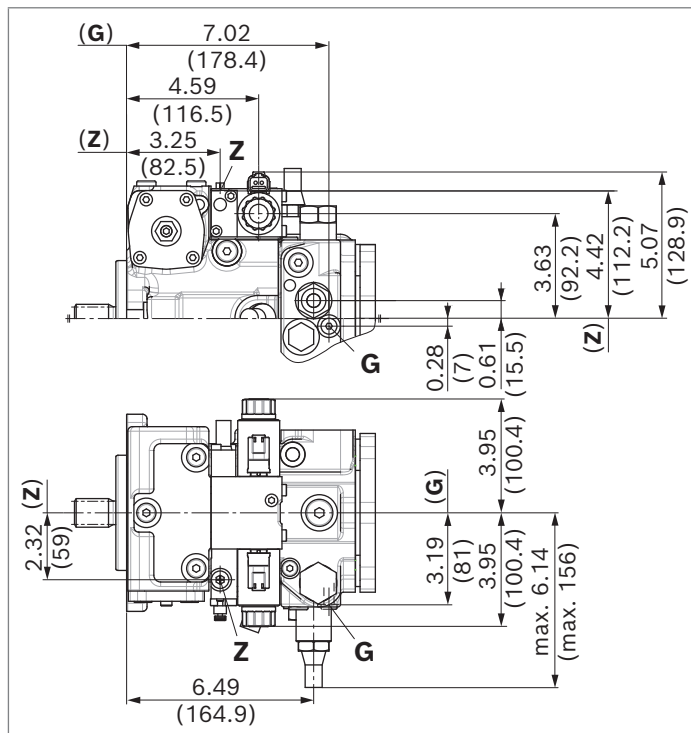DA control valve▼ **DA..2** – Fixed setting▼ **DA..3** – Mechanically adjustable with position lever▼ **DA..7** – Fixed setting and ports for pilot control device▼ **DA..8** – Fixed setting and inch valve mounted


Dimensions, size 45

EP – Proportional control, electric


Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (60)

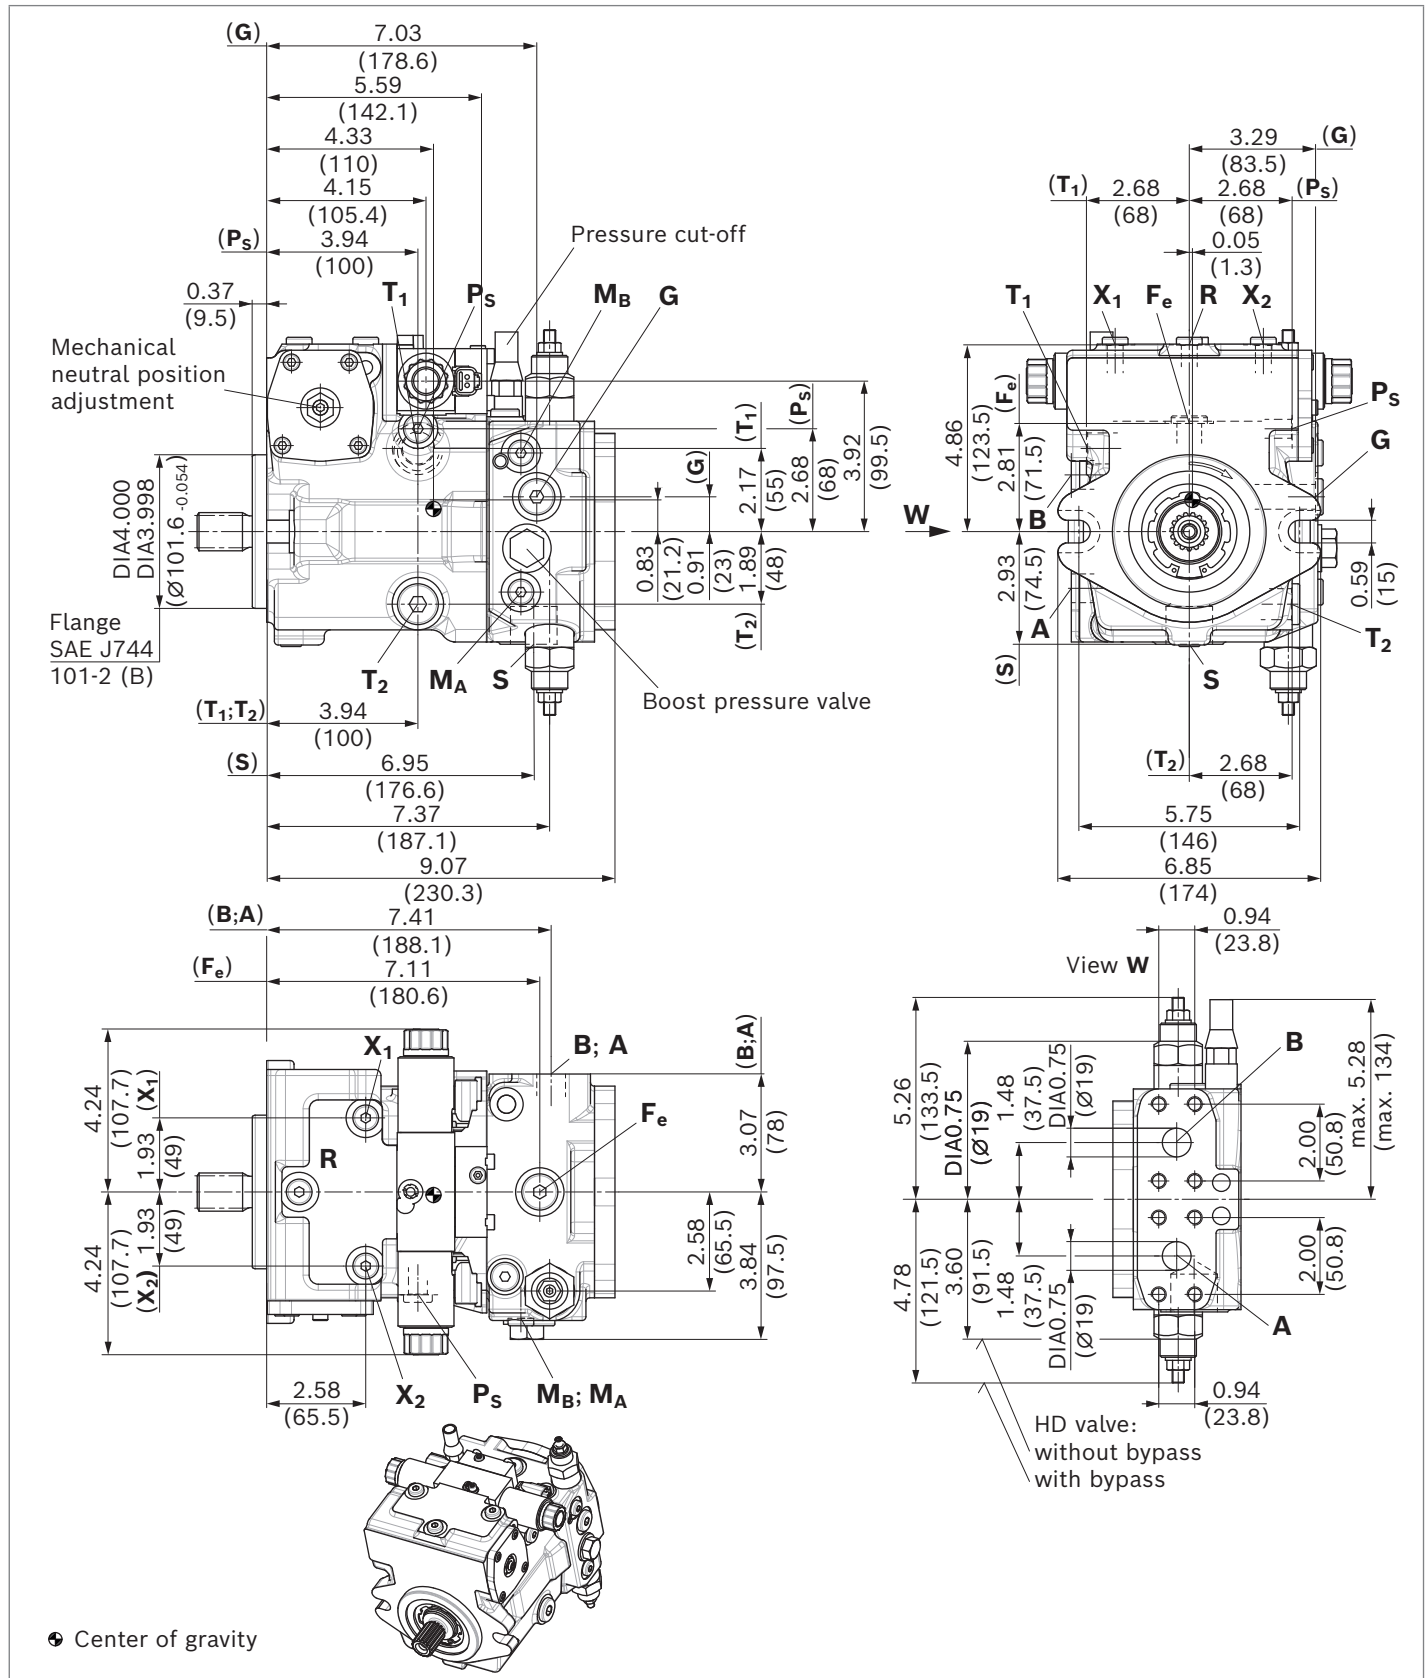

▼ Splined shaft ANSI B92.1a

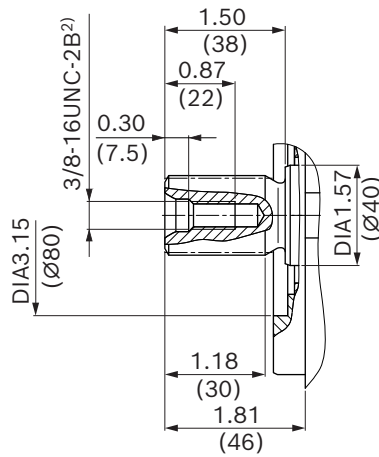S – 1 in 15T 16/32DP¹⁾

▼ Splined shaft ANSI B92.1a

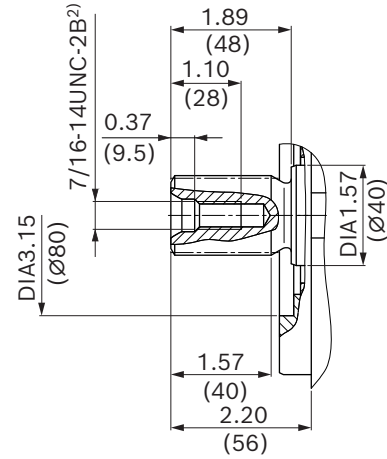T – 1 1/4 in 14T 12/24DP¹⁾

Ports		Standard	Size	p_{max} [psi (bar)] ³⁾	State ⁹⁾
A, B	Working port Fastening thread	SAEJ518 ⁴⁾ ASME B1.1	3/4 in 3/8 in -16 UNC-2B; 0.67 (17) deep	5100 (350)	O
S	Suction port	ISO 11926 ⁵⁾	1 5/16 in -12 UN-2B; 0.79 (20) deep	75 (5)	O ⁷⁾
T₁	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	O ⁸⁾
T₂	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	X ⁸⁾
R	Air bleed port	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	45 (3)	X
X₁, X₂	Control pressure port (upstream of orifice)	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	580 (40)	X
G (F_a)	Boost pressure port inlet	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
G	Boost pressure port inlet (only DA control valve)	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	580 (40)	X
P_s	Pilot pressure port	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	X
Y	Pilot pressure port output (only DA..7)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
M_A, M_B	Measuring port, pressure A, B	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	5100 (350)	X
F_e	Boost pressure port output	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
Y₁, Y₂	Pilot pressure port output (only HD)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
Z	Pilot pressure port (inch signal only DA..8)	DIN 3852 ⁶⁾	M10 × 1; 0.31 (8) deep	1150 (80)	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to ISO 11926-2.

6) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E


7) Plugged for external boost pressure supply.

8) Depending on installation position, **T₁** or **T₂** must be connected (see also installation instructions on page 54).


9) O = Must be connected (comes plugged)

X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

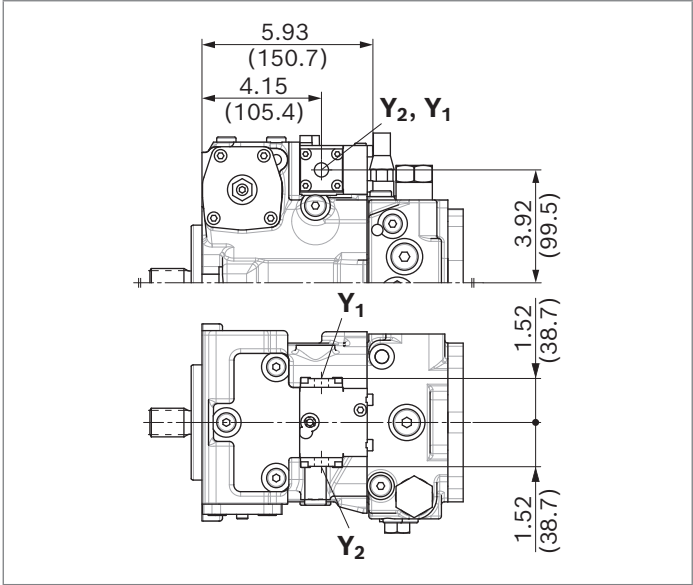


▼ **HW** – Proportional control, hydraulic, mechanical servo




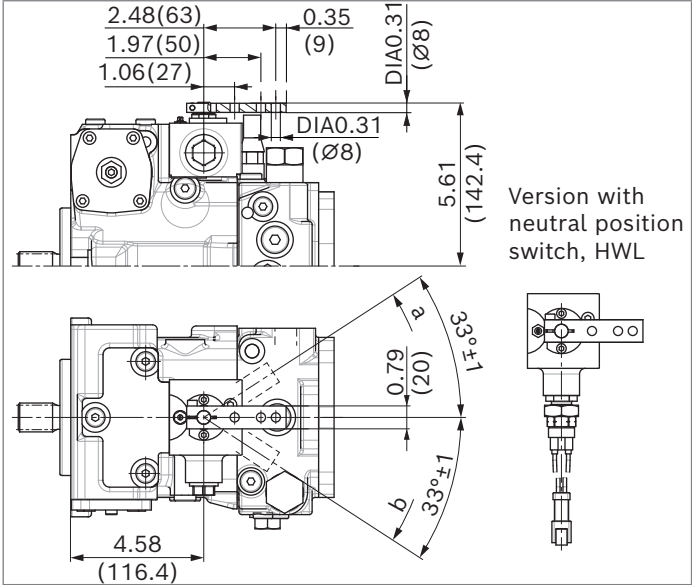


▼ **DG** – Hydraulic control, direct operated

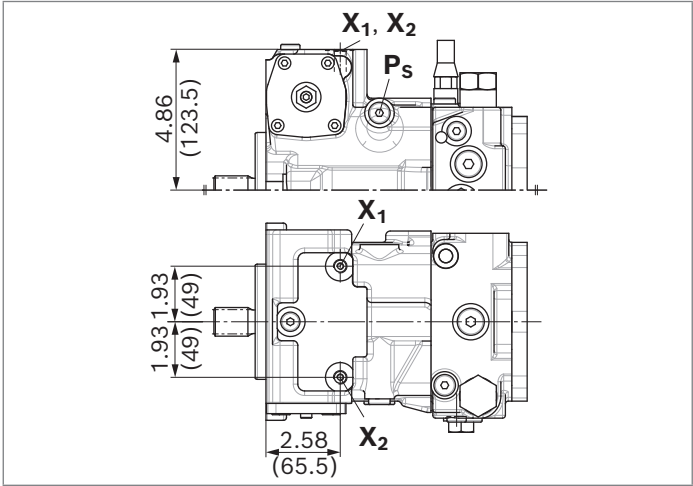

▼ **EZ** – Two-point control, electric

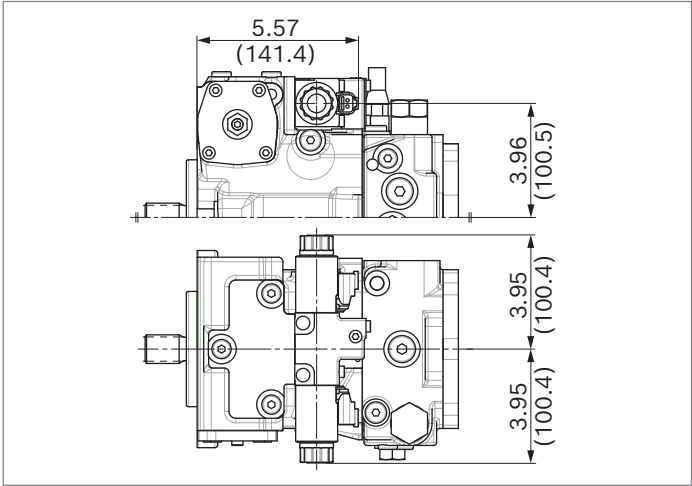


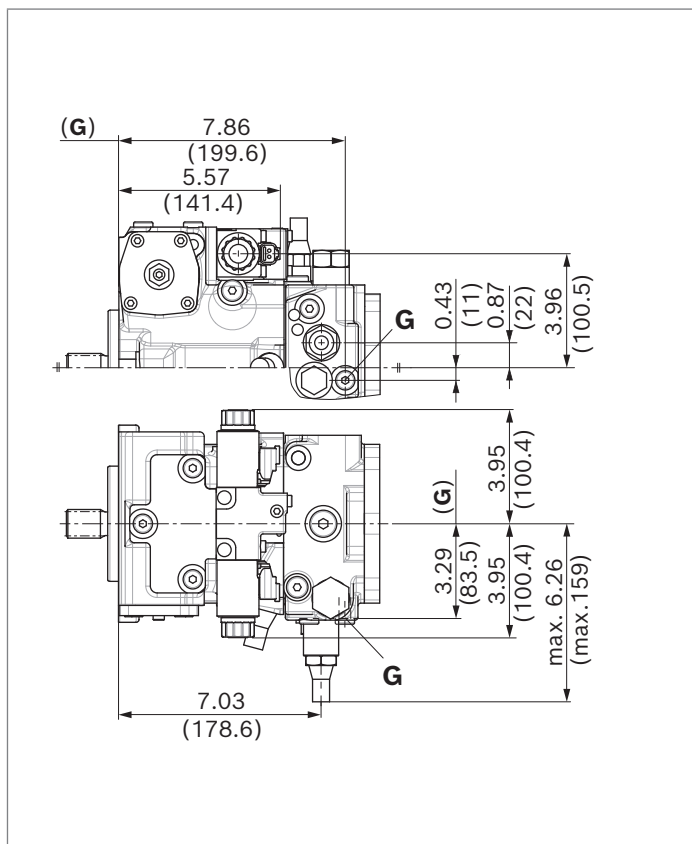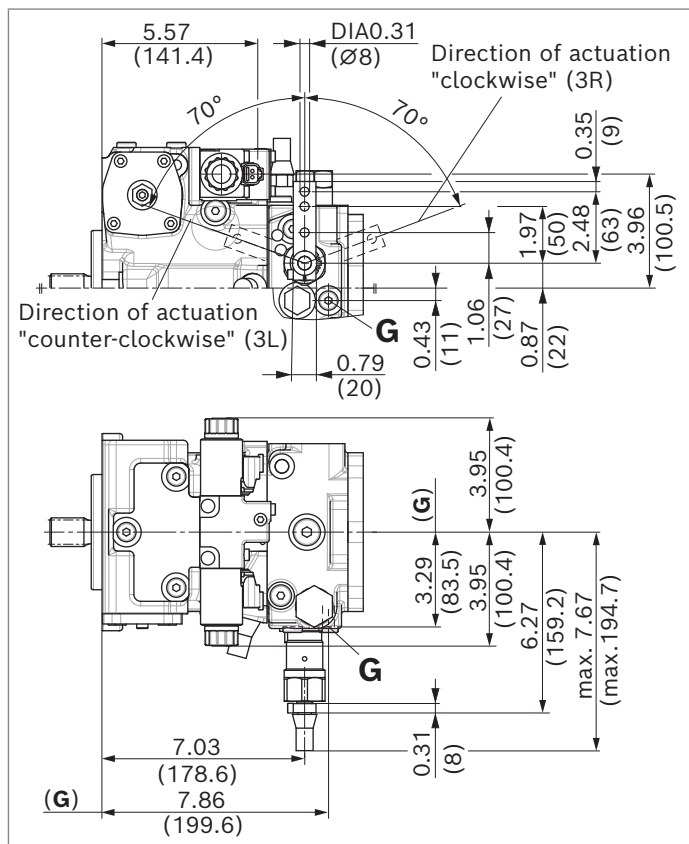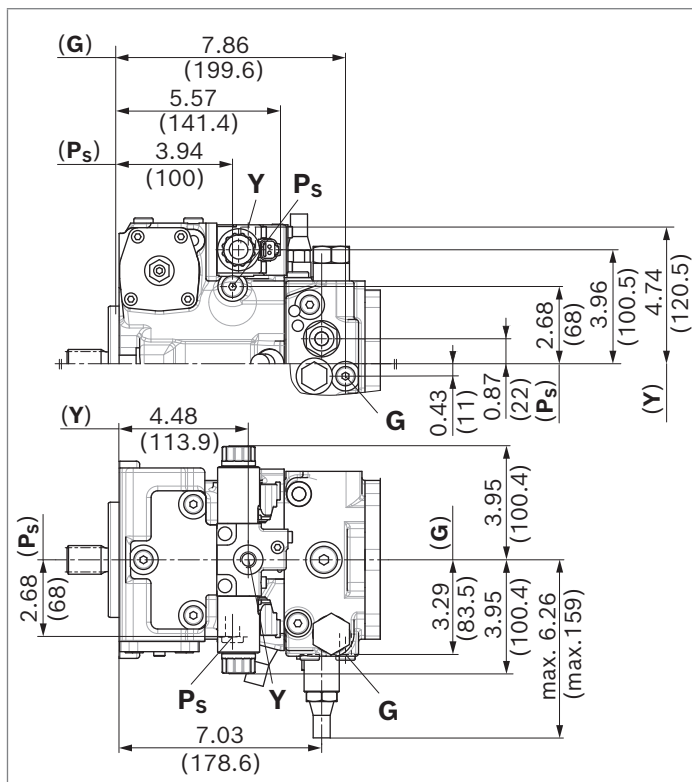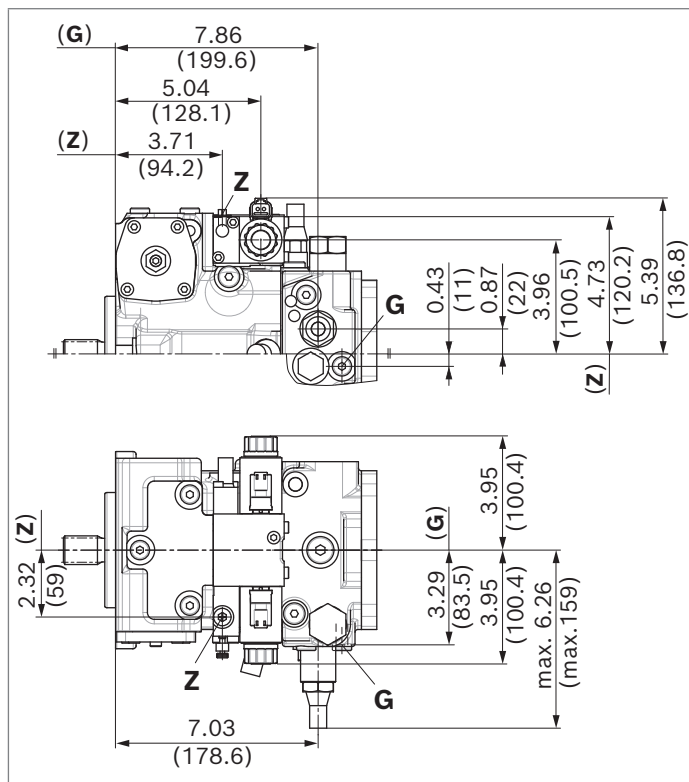DA control valve▼ **DA..2** – Fixed setting▼ **DA..3** – Mechanically adjustable with position lever▼ **DA..7** – Fixed setting and ports for pilot control device▼ **DA..8** – Fixed setting and inch valve mounted


Dimensions, size 63

EP – Proportional control, electric


Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (60)

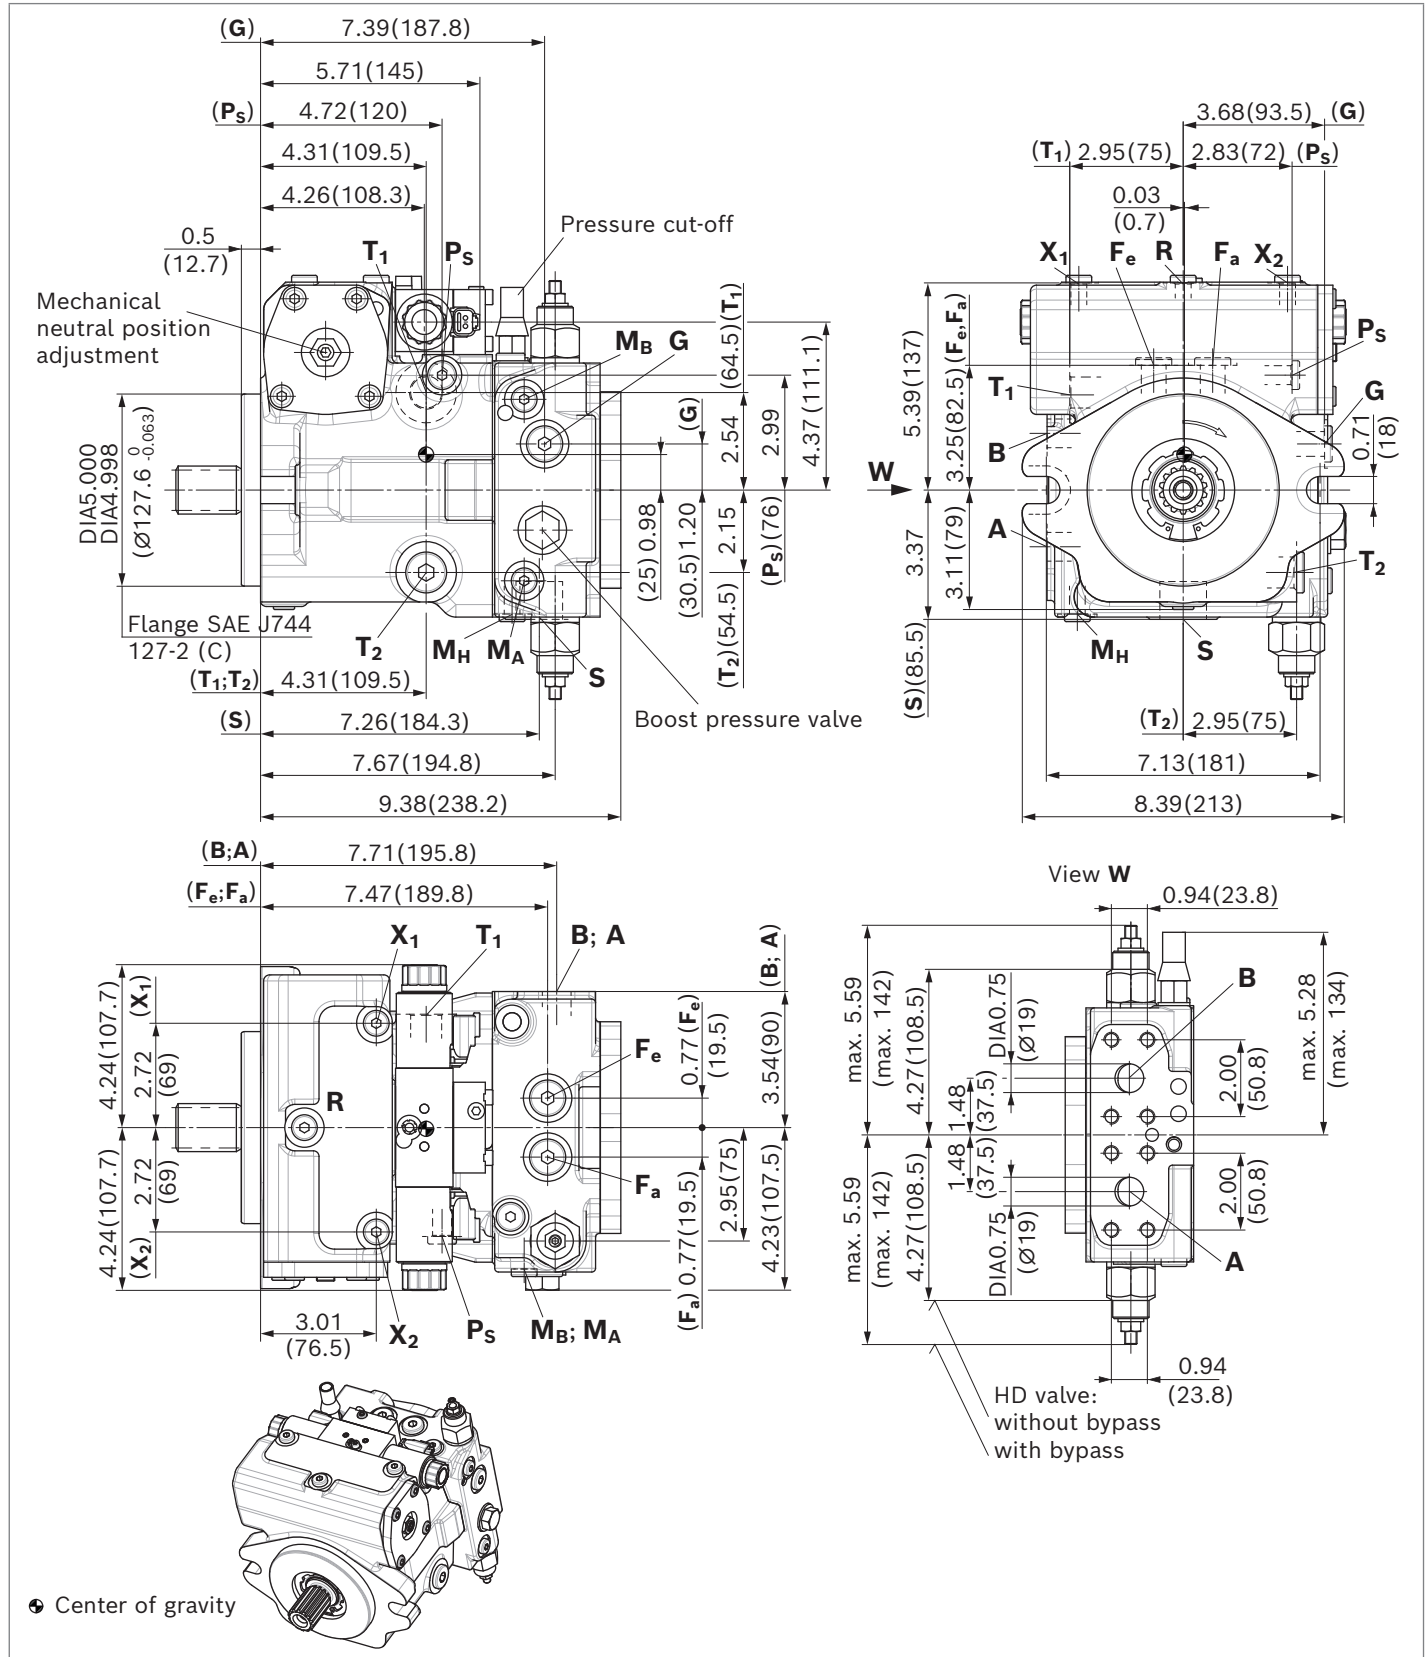

▼ Splined shaft ANSI B92.1a

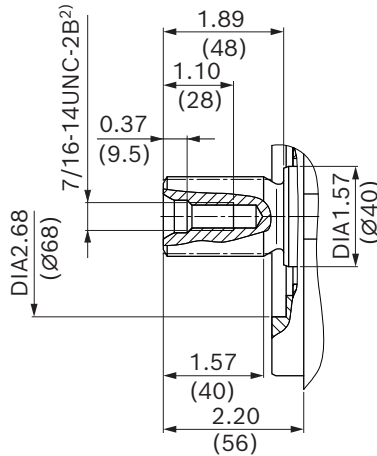S – 1 1/4 in 14T 12/24DP¹⁾

▼ Splined shaft ANSI B92.1a

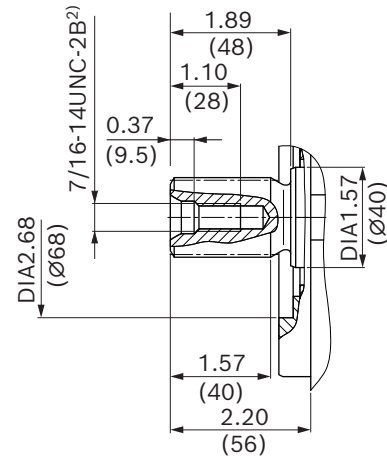T – 1 3/8 in 21T 16/32DP¹⁾

Ports		Standard	Size	$p_{\max}$ [psi (bar)] ³⁾	State ⁹⁾
A, B	Working port	SAEJ518 ⁴⁾	3/4 in	5100 (350)	O
	Fastening thread	ASME B1.1	3/8 in -16 UNC-2B; 0.67 (17) deep		
S	Suction port	ISO 11926 ⁵⁾	1 5/16 in -12 UN-2B; 0.79 (20) deep	75 (5)	O ⁷⁾
T ₁	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	O ⁸⁾
T ₂	Drain port	ISO 11926 ⁵⁾	7/8 in -14 UNF-2B; 0.67 (17) deep	45 (3)	X ⁸⁾
R	Air bleed port	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	45 (3)	X
X ₁ , X ₂	Control pressure port (upstream of orifice)	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	580 (40)	X
G	Boost pressure port inlet	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	X
P _S	Pilot pressure port	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	X
Y	Pilot pressure port output (only DA..7)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
M _A , M _B	Measuring port, pressure A, B	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	5100 (350)	X
M _H	Measuring port, high pressure	ISO 11926 ⁵⁾	7/16 in -20 UNF-2B; 0.47 (12) deep	5100 (350)	X
F _a	Boost pressure port inlet	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
F _e	Boost pressure port output	ISO 11926 ⁵⁾	3/4 in -16 UNF-2B; 0.59 (15) deep	580 (40)	X
Y ₁ , Y ₂	Pilot pressure port output (only HD)	ISO 11926 ⁵⁾	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
Z	Pilot pressure port (inch signal only DA..8)	DIN 3852 ⁶⁾	M10 × 1; 0.31 (8) deep	1150 (80)	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to ISO 11926-2.

6) The countersink can be deeper than specified in the standard. Ports designed for straight stud ends according to EN ISO 9974-2 type E


7) Plugged for external boost pressure supply.

8) Depending on installation position, **T₁** or **T₂** must be connected (see also installation instructions on page 54).


9) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

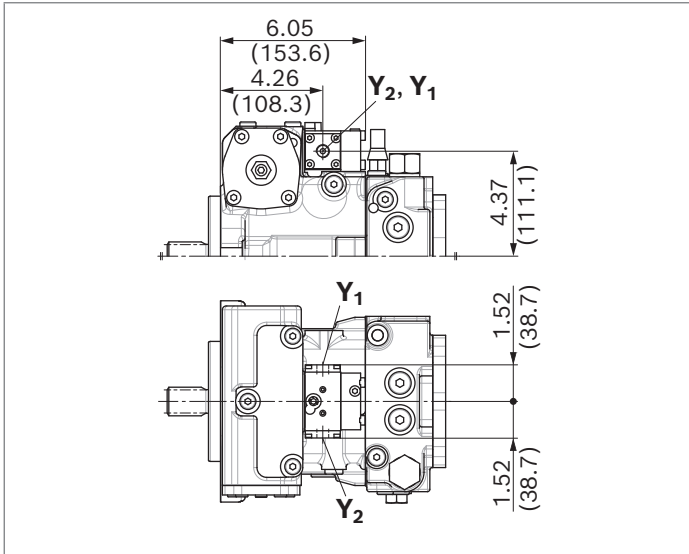


▼ **HW** – Proportional control, hydraulic, mechanical servo




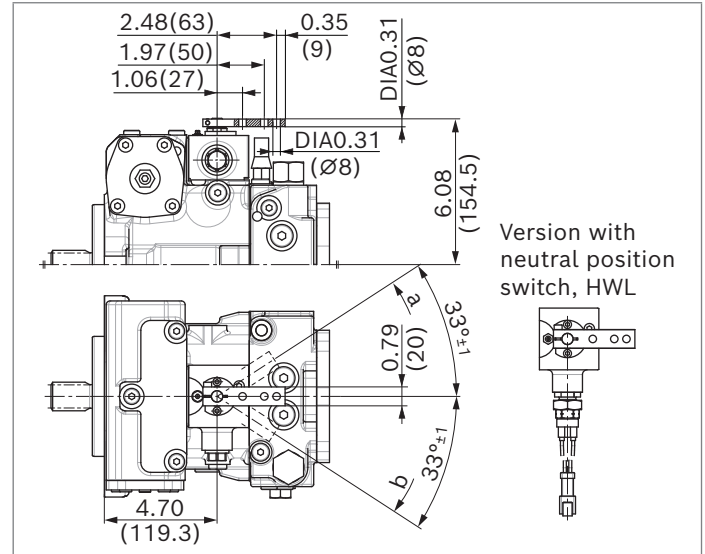


▼ **DG** – Hydraulic control, direct operated

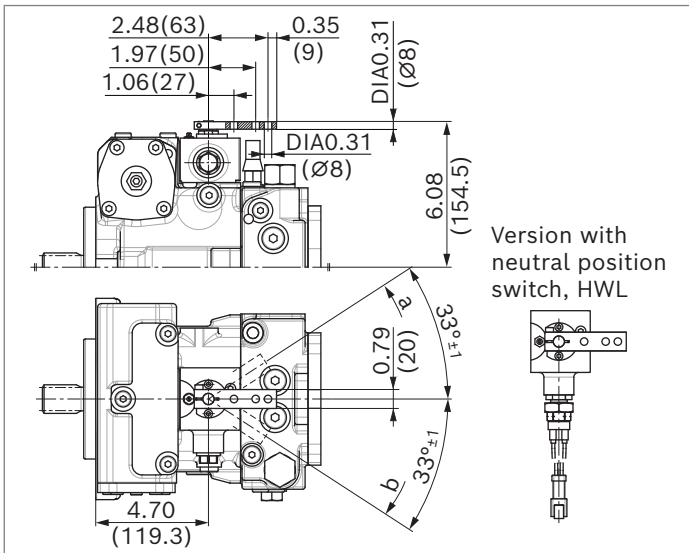

▼ **EZ** – Two-point control, electric

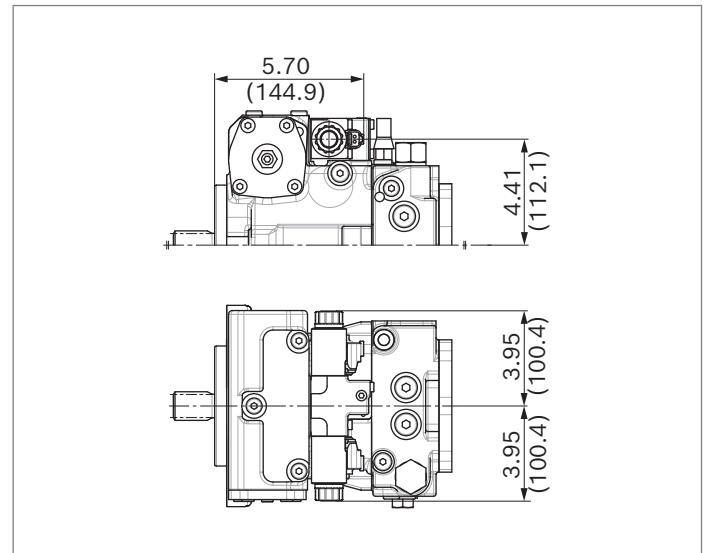


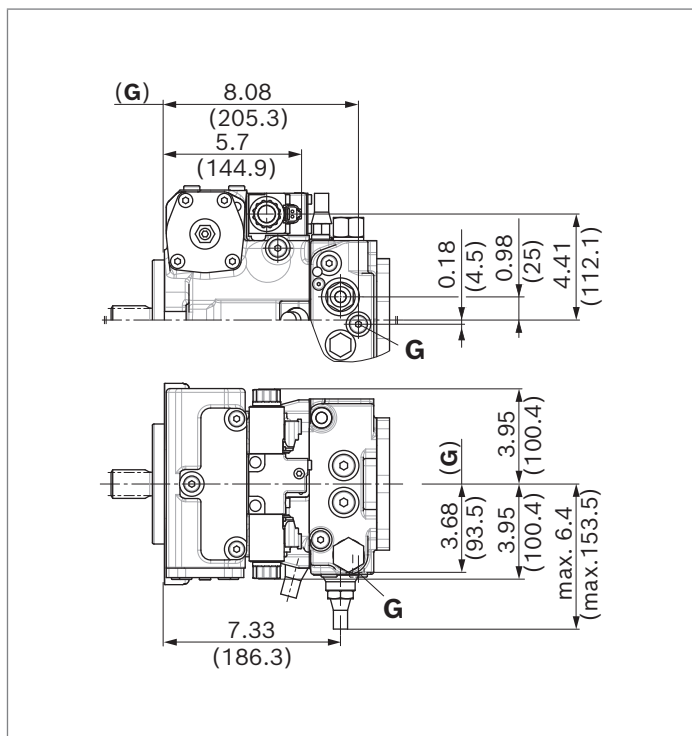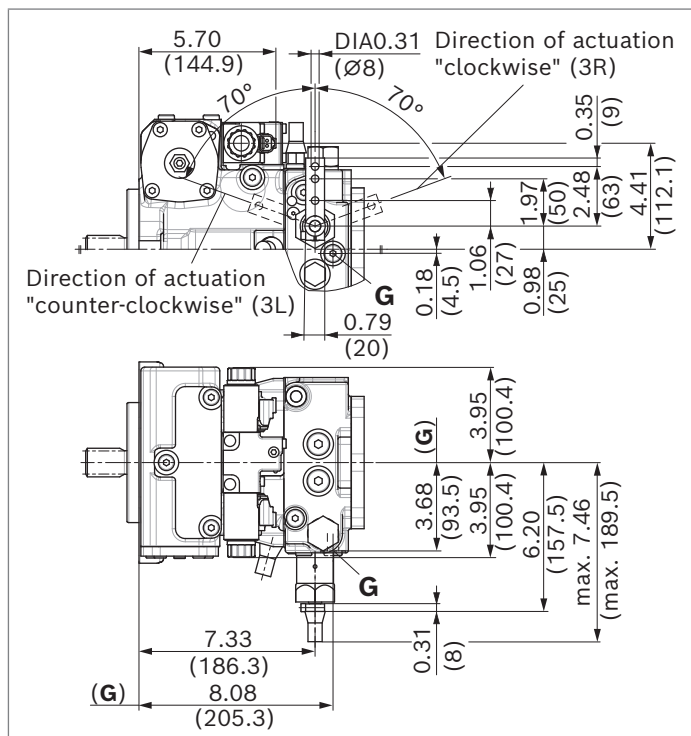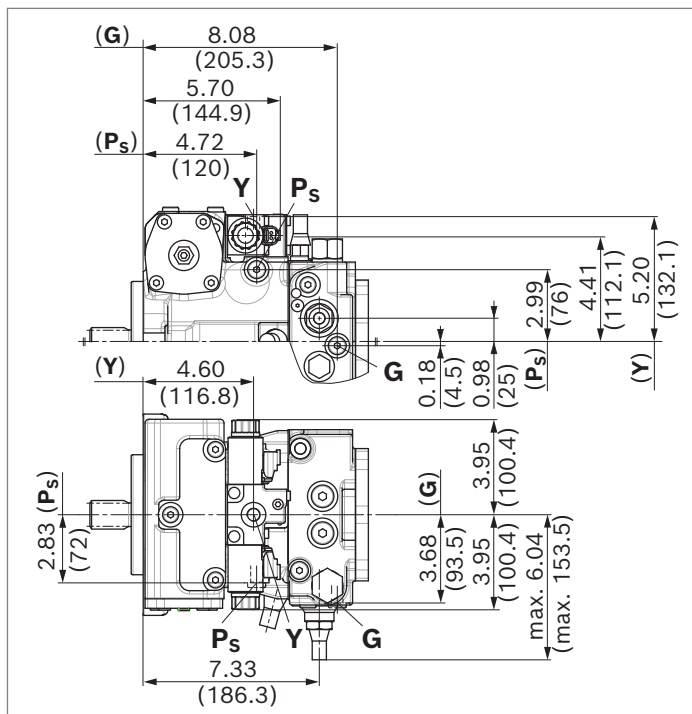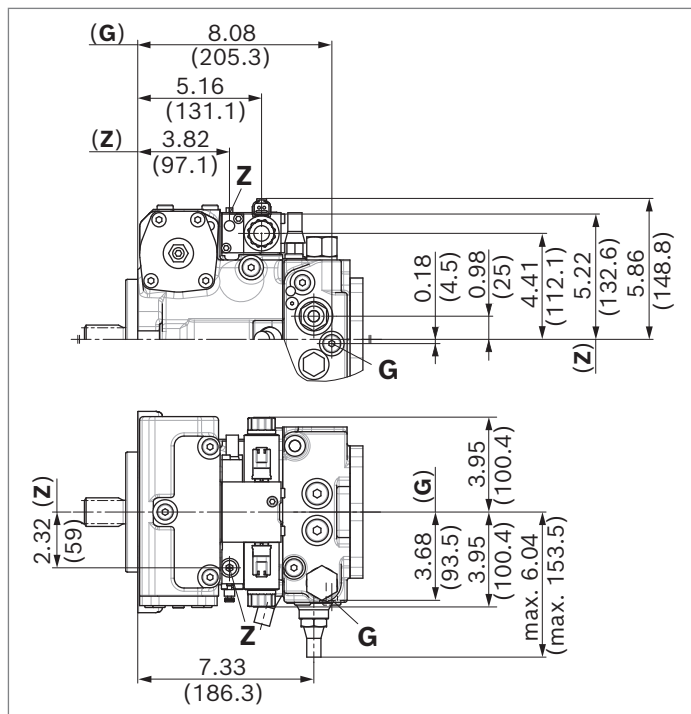DA control valve▼ **DA..2** – Fixed setting▼ **DA..3** – Mechanically adjustable with position lever▼ **DA..7** – Fixed setting and ports for pilot control device▼ **DA..8** – Fixed setting and inch valve mounted

Dimensions of through drive

Flange SAE J744	Hub for splined shaft ¹⁾		28	45	63	Code
Without through drive			•	•	•	00
82-2 (A)	5/8 in	9T 16/32DP	•	•	•	01

▼ **N00** – without boost pump, without through drive / **F00** – with boost pump, without through drive

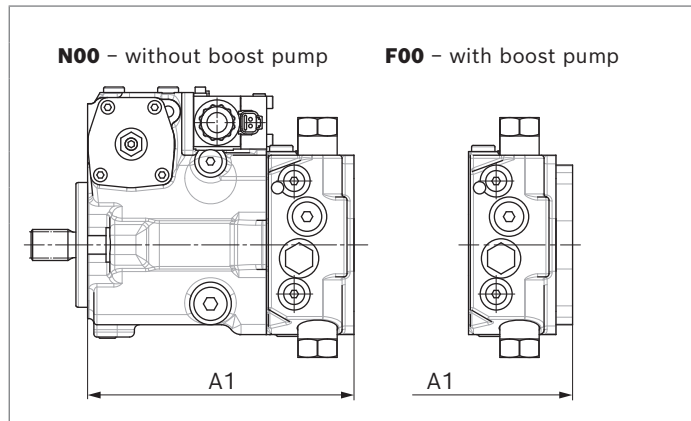


NG		A1 (N00)	A1 (F00)
28	in	7.94	8.48
	mm	201.7	215.3
45	in	8.54	9.07
	mm	216.8	230.5
63	in	8.84	9.38
	mm	224.5	238.2

▼ **F01⁵⁾, size 28 (with boost pump)**

Flange SAE J744: 82-2 (A)


Hub for splined shaft 5/8 in 9T 16/32DP¹⁾

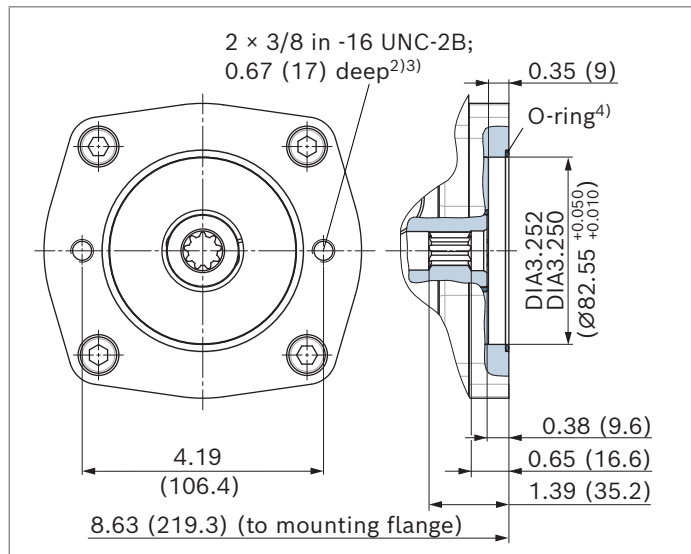

▼ **K01⁵⁾, size 28 (without boost pump)**

Flange SAE J744: 82-2 (A)

Hub for splined shaft 5/8 in 9T 16/32DP¹⁾

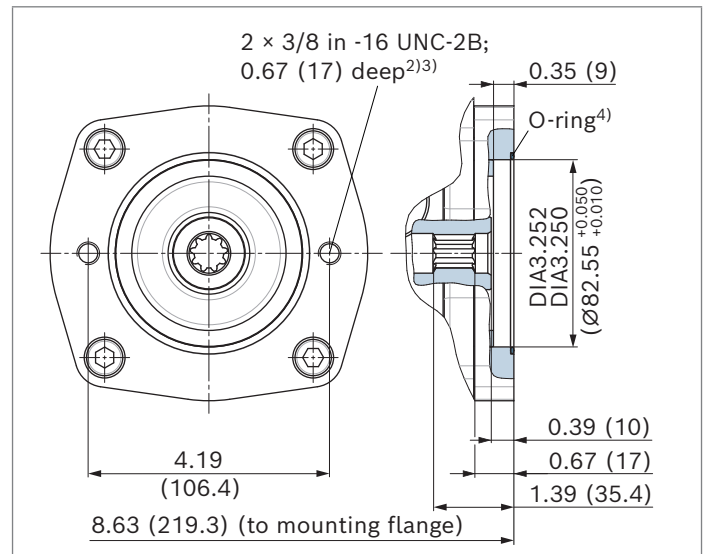


- 1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.
- 2) Thread according to ASME B1.1
- 3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1
- 4) O-ring included in the scope of delivery
- 5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.


Flange SAE J744	Hub for splined shaft ¹⁾		28	45	63	Code
82-2 (A)	5/8 in	9T 16/32DP	•	•	•	01

▼ **F01⁵⁾, size 45 (with boost pump)**


Flange SAE J744: 82-2 (A)

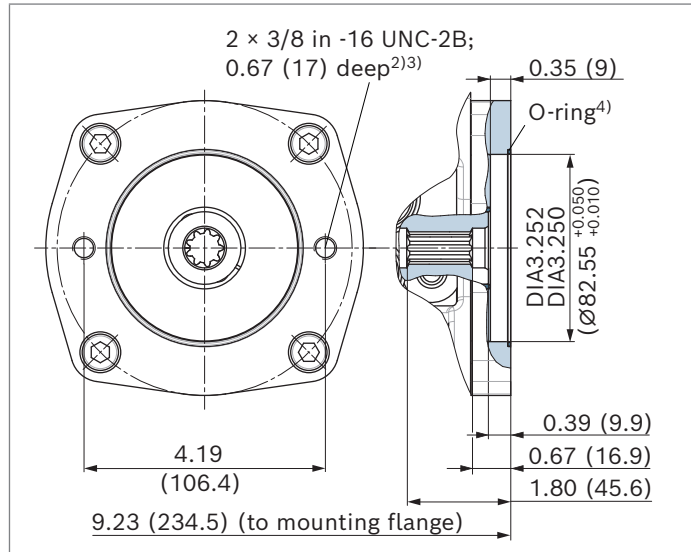Hub for splined shaft 5/8 in 9T 16/32DP¹⁾▼ **K01⁵⁾, size 45 (without boost pump)**


Flange SAE J744: 82-2 (A)

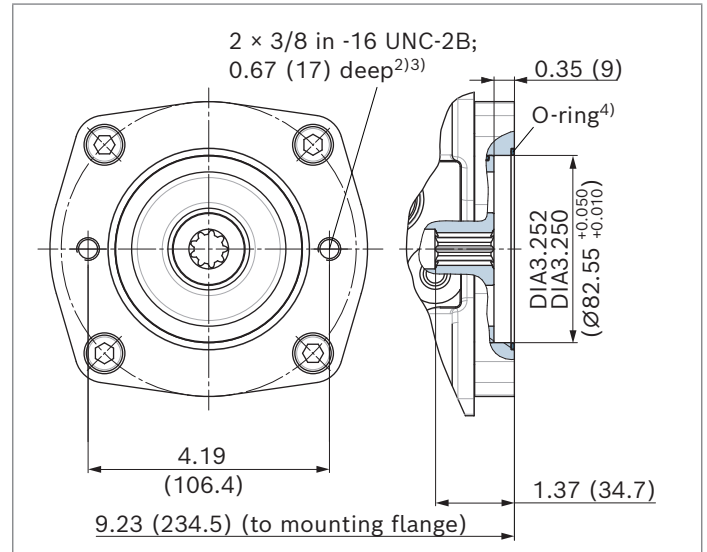Hub for splined shaft 5/8 in 9T 16/32DP¹⁾▼ **F01⁵⁾, size 63 (with boost pump)**

Flange SAE J744: 82-2 (A)

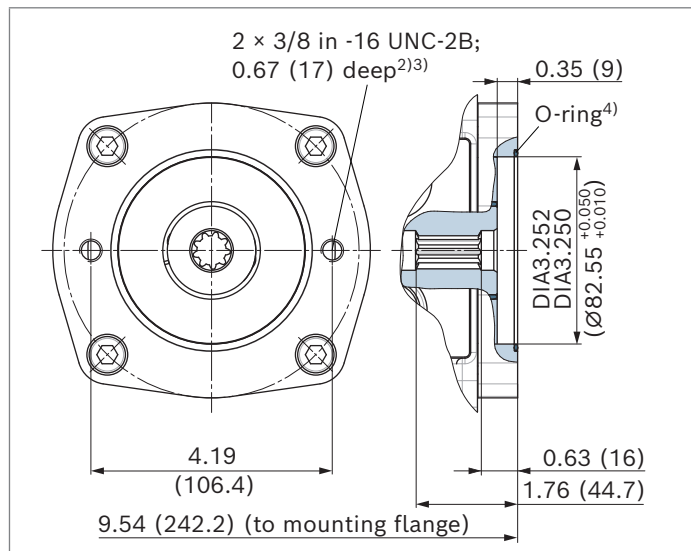Hub for splined shaft 5/8 in 9T 16/32DP¹⁾▼ **K01⁵⁾, size 63 (without boost pump)**

Flange SAE J744: 82-2 (A)

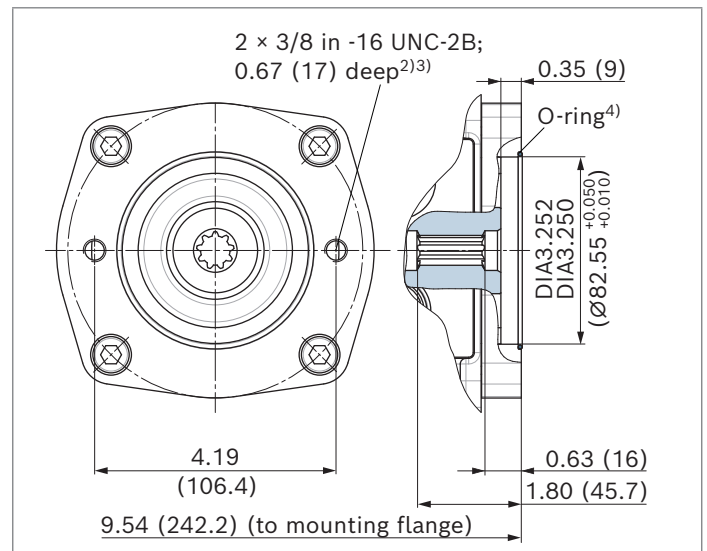Hub for splined shaft 5/8 in 9T 16/32DP¹⁾

1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.

2) Thread according to ASME B1.1

3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1

4) O-ring included in the scope of delivery


5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

Flange SAE J744	Hub for splined shaft ¹⁾		28	45	63	Code
101-2 (B)	7/8 in	13T 16/32DP	•	•	•	02

▼ **F02⁵⁾, size 28 (with boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 7/8 in 13T 16/32DP¹⁾

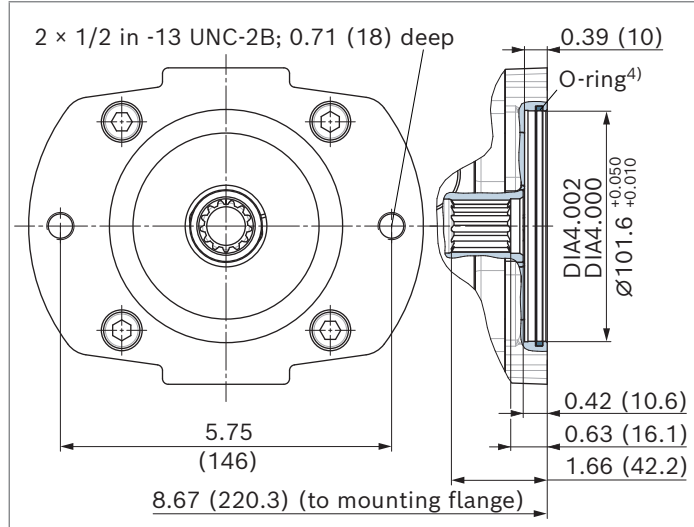

▼ **K02⁵⁾, size 28 (without boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 7/8 in 13T 16/32DP¹⁾

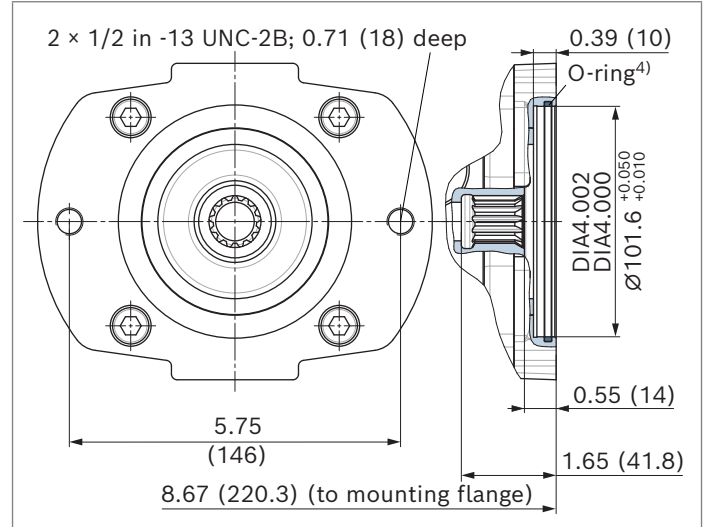

▼ **F02⁵⁾, size 45 (with boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 7/8 in 13T 16/32DP¹⁾

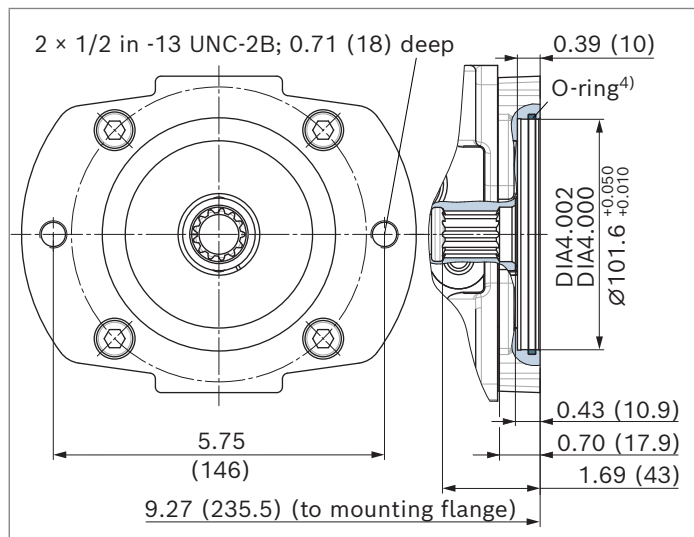

▼ **K02⁵⁾, size 45 (without boost pump)**

Flange SAE J744: 101-2 (B)

Hub for splined shaft 7/8 in 13T 16/32DP¹⁾

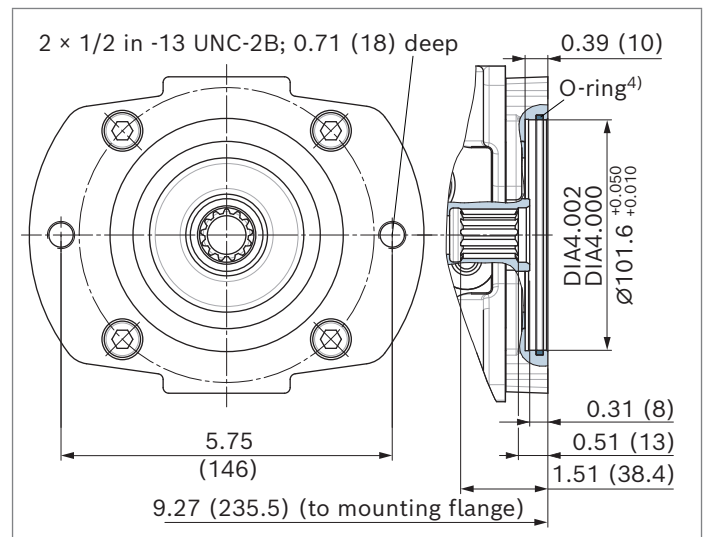


- 1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.
- 2) Thread according to ASME B1.1
- 3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1
- 4) O-ring included in the scope of delivery
- 5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.


Flange SAE J744	Hub for splined shaft ¹⁾		28	45	63	Code
101-2 (B)	7/8 in	13T 16/32DP	•	•	•	02
	1 in	15T 16/32DP	•	•	•	04

▼ **F02⁵⁾, size 63 (with boost pump)**


Flange SAE J744: 101-2 (B)

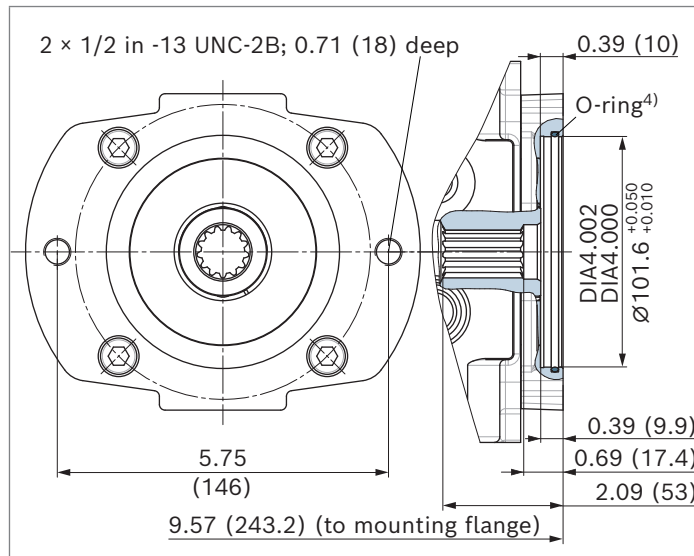Hub for splined shaft 7/8 in 13T 16/32DP¹⁾▼ **K02⁵⁾, size 63 (without boost pump)**


Flange SAE J744: 101-2 (B)

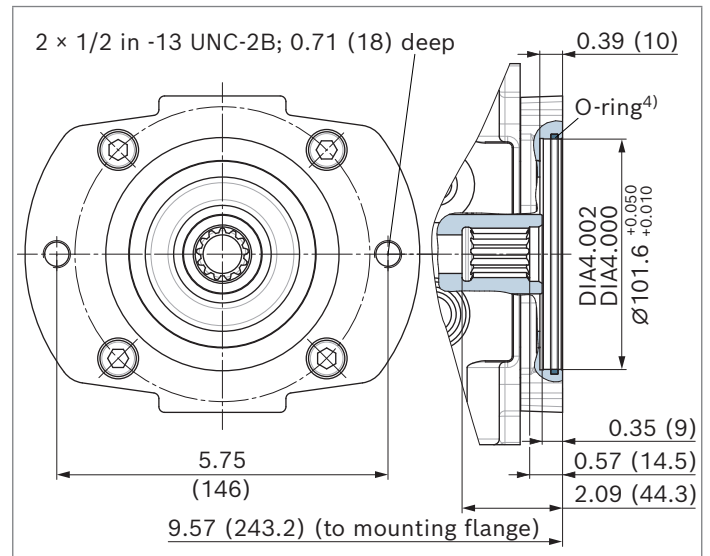Hub for splined shaft 7/8 in 13T 16/32DP¹⁾▼ **F04⁵⁾, size 28 (with boost pump)**

Flange SAE J744: 101-2 (B)

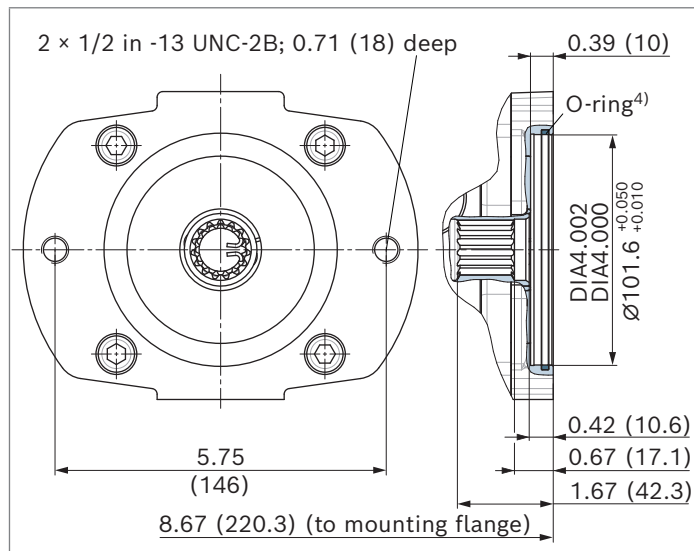Hub for splined shaft 1 in 15T 16/32DP¹⁾▼ **K04⁵⁾, size 28 (without boost pump)**

Flange SAE J744: 101-2 (B)

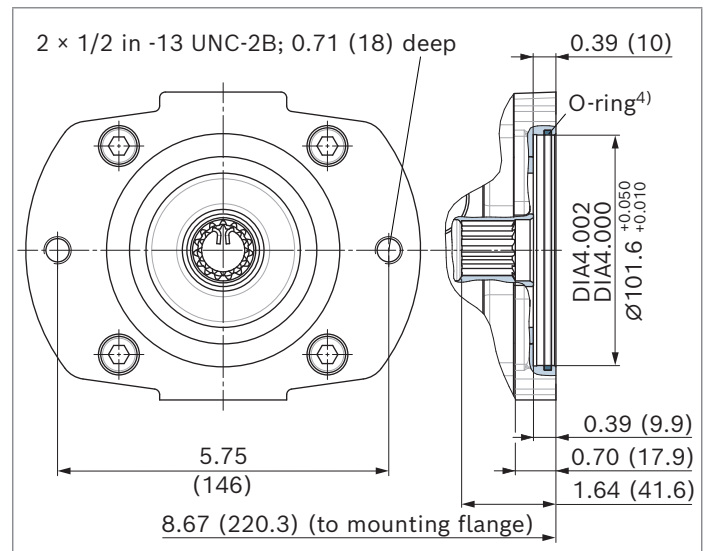Hub for splined shaft 1 in 15T 16/32DP¹⁾

1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.

2) Thread according to ASME B1.1

3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1

4) O-ring included in the scope of delivery


5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

Flange SAE J744	Hub for splined shaft ¹⁾		28	45	63	Code
101-2 (B)	1 in	15T 16/32DP	•	•	•	04

▼ **F04⁵⁾, size 45 (with boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 1 in 15T 16/32DP¹⁾

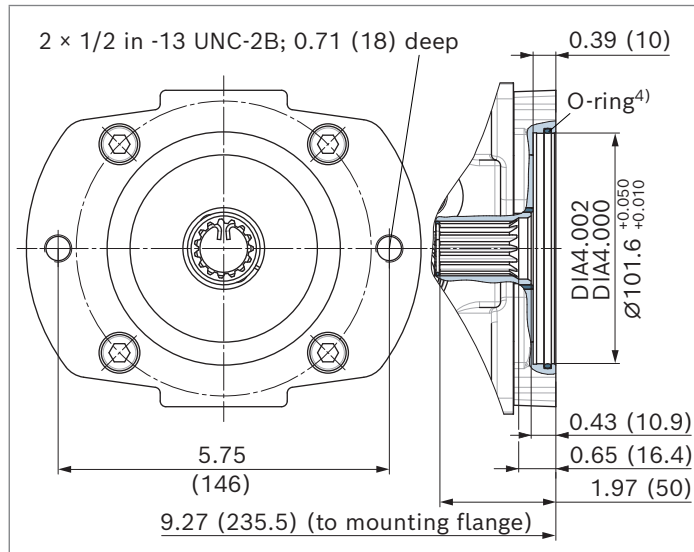

▼ **K04⁵⁾, size 45 (without boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 1 in 15T 16/32DP¹⁾

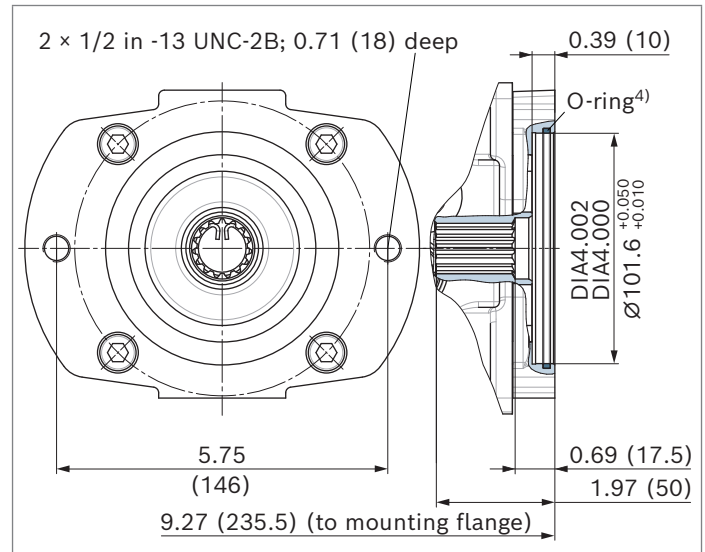

▼ **F04⁵⁾, size 63 (with boost pump)**

Flange SAE J744: 101-2 (B)


Hub for splined shaft 1 in 15T 16/32DP¹⁾

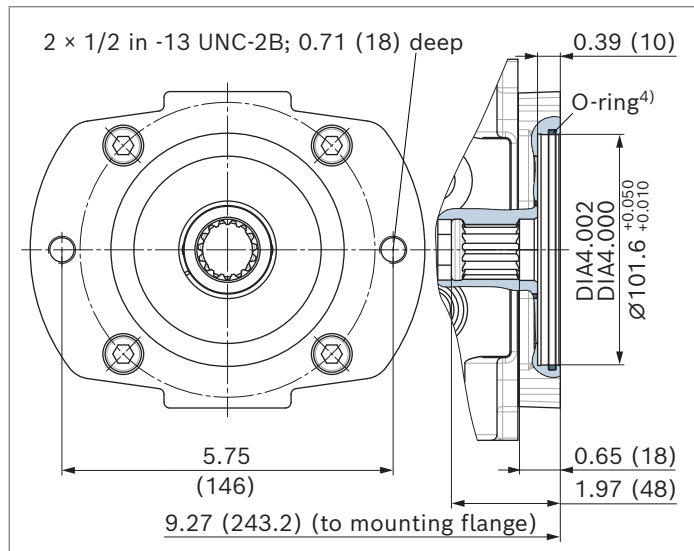

▼ **K04⁵⁾, size 63 (without boost pump)**

Flange SAE J744: 101-2 (B)

Hub for splined shaft 1 in 15T 16/32DP¹⁾

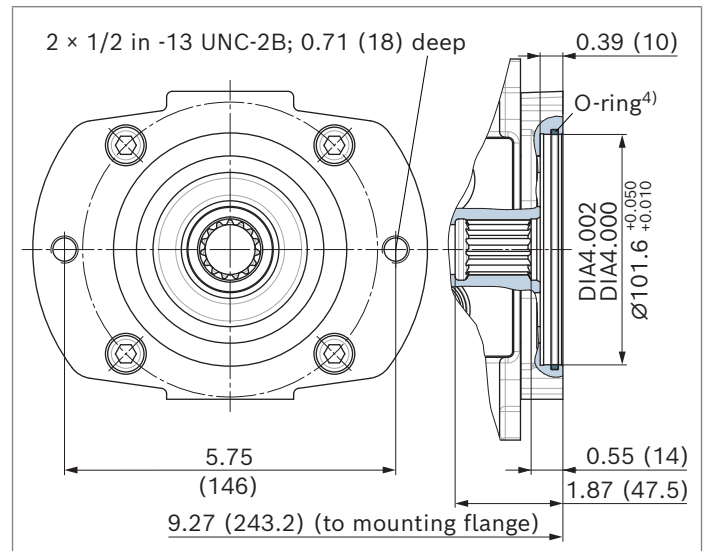


- 1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.
- 2) Thread according to ASME B1.1
- 3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1
- 4) O-ring included in the scope of delivery
- 5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.


Flange SAE J744	Hub for splined shaft ¹⁾	28	45	63	Code
127-2 (C)	1 1/4 in 14T 12/24DP	-	-	●	07

▼ **F07⁵⁾, size 63 (with boost pump)**

Flange SAE J744: 127-2 (C)

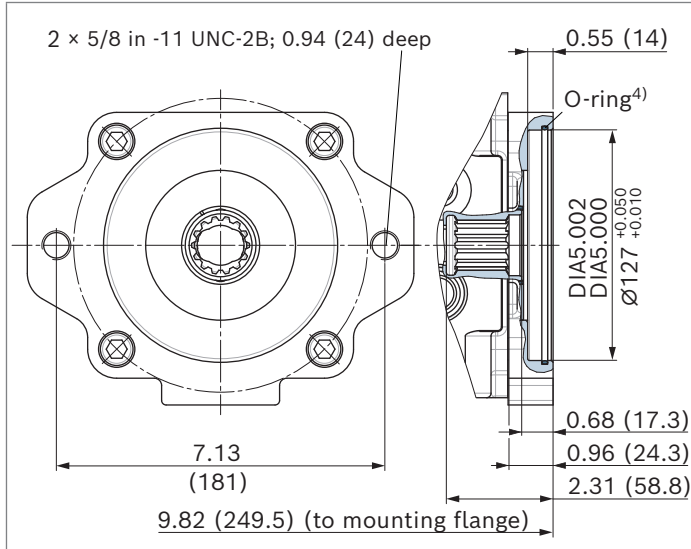Hub for splined shaft 1 1/4 in 14T 12/24DP¹⁾▼ **K07⁵⁾, size 63 (without boost pump)**

Flange SAE J744: 127-2 (C)

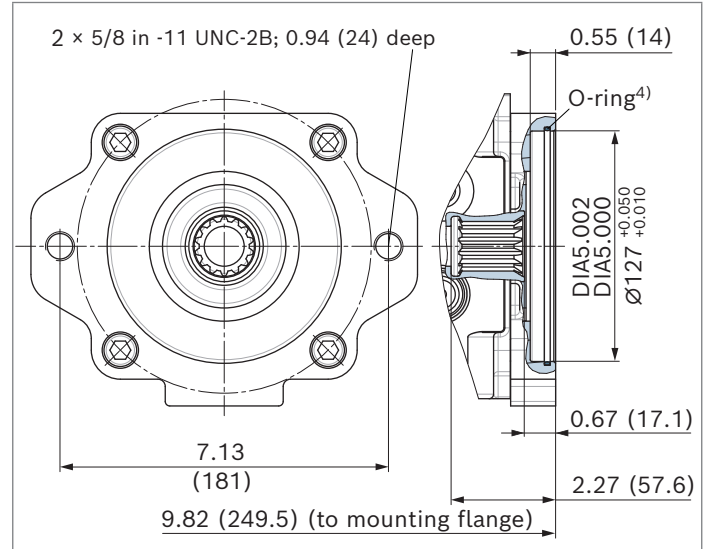Hub for splined shaft 1 1/4 in 14T 12/24DP¹⁾

1) Involute spline of the splined shaft in accordance with ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5. Design for connecting overview according to SAE J744.

2) Thread according to ASME B1.1

3) Design according to VDI 2230 with $\mu = 0.1$ for screw quality 8.8 according to ISO 898-1

4) O-ring included in the scope of delivery

5) Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.

Overview of mounting options

Through drive ¹⁾			Mounting options – 2nd pump			
Flange	Hub for splined shaft	Code	A10VG/10 NG (shaft)	A10VG/60 NG (shaft)	A4VG/32 NG (shaft)	External gear pump ²⁾
82-2 (A)	5/8 in	F/K01	–	–	–	AZPF, AZPS NG4 ... 28 AZPW NG5 ... 22
101-2 (B)	7/8 in	F/K02	–	–	–	AZPN-11 NG20 ... 25 AZPG-22 NG28 ... 100
	1 in	F/K04	28, 45 (S)	45 (S5)	28 (S)	–
127-2 (C)	1 1/4 in	F/K07	63 (S)	–	40, 56 (S)	–

Through drive ¹⁾			Mounting options – 2nd pump			
Flange	Hub for splined shaft	Code	A10V(S)O/31 NG (shaft)	A10VO/32 NG (shaft)	A10V(S)O/5X NG (shaft)	A11VO/1 NG (shaft)
82-2 (A)	5/8 in	F/K01	18 (U)	–	10, 18 (U)	–
101-2 (B)	7/8 in	F/K02	28 (S) 45 (U)	45 (U)	28 (S) 45 (U)	–
	1 in	F/K04	45 (S)	45 (S)	45 (S) 60, 63 (U)	40 (S)
127-2 (C)	1 1/4 in	F/K07	–	–	–	–

Notice

The mounting options listed only apply for drive shaft versions with undercut. Please contact us for drive shafts without undercut.


¹⁾ Availability of the individual sizes, see type code on page 3.

²⁾ Bosch Rexroth recommends special versions of the gear pumps.
Please contact us.

Combination pumps A10VG + A10VG

Total length A

A10VG				
1st pump		NG28	NG45	NG63
NG28	in	435.5	–	–
	mm	435.5	–	–
NG45	in		18.35	
	mm		466.0	
NG63	in	18.05	18.65	19.20
	mm	458.5	473.7	487.7

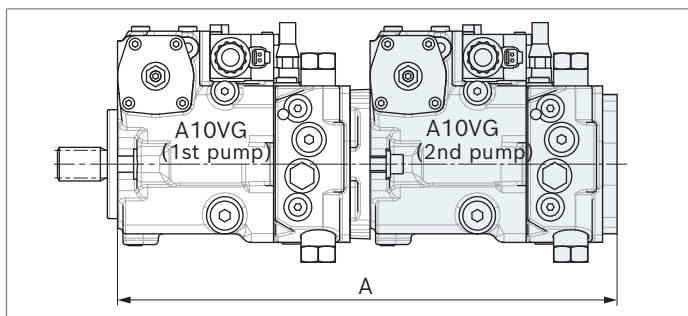

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes.

When ordering combination pumps the type designations for the 1st and the 2nd pump must be linked by a "+".

Order example:

**AA10VG45EP4D1/10R-NTC60F043SP-0 +
AA10VG45EP4D1/10R-NSC60F003SP-0**

For combination pumps, we recommend a support. Without additional support from the second pump, calculation of the mounting flange is necessary for every load case, please contact us.

Notice

- The combination pump type code is shown in shortened form in the order confirmation.
- The permissible through-drive torques are to be observed (see page 10).

1) 2nd pump without through drive and with boost pump, F00

High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic gear (pump and motor) from overloading. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

The high-pressure relief valves are exclusively intended to protect the system from high-pressure peaks until the control dynamics of the pressure cut-off ensure the intended maximum working pressure.

A hydraulic-mechanical or electronic pressure cut-off must be provided for permanent high-pressure limitation.


Setting ranges

High-pressure relief valve, direct operated	Differential pressure setting Δp_{HD}
Setting range valve 3, 5	4650 psi (320 bar)
Δp_{HD} 3600 ... 4650 psi	4350 psi (300 bar)
(Δp_{HD} 250 ... 320 bar)	3900 psi (270 bar)
(see type code)	
Setting range valve 4, 6	3600 psi (250 bar)
Δp_{HD} 1450 ... 3600 psi	3350 psi (230 bar)
(Δp_{HD} 100 ... 250 bar)	2900 psi (200 bar)
(see type code)	2200 psi (150 bar)
	1450 psi (100 bar)

Settings on high-pressure relief valve A and B	
Differential pressure setting	$\Delta p_{HD} = \dots$ psi
Test pressure of the HD valve (at q_{V1})	$p_{max} = \dots$ psi
$(p_{max} = \Delta p_{HD} + p_{Sp})$	

- ▶ The valve settings are made at $n = 1000$ rpm and at $V_{g\ max}$ (q_{V1}). There may be deviations in the opening pressures with other operating parameters.
- ▶ When ordering, state the differential pressure setting Δp_{HD} in the plain text.

▼ Circuit diagram

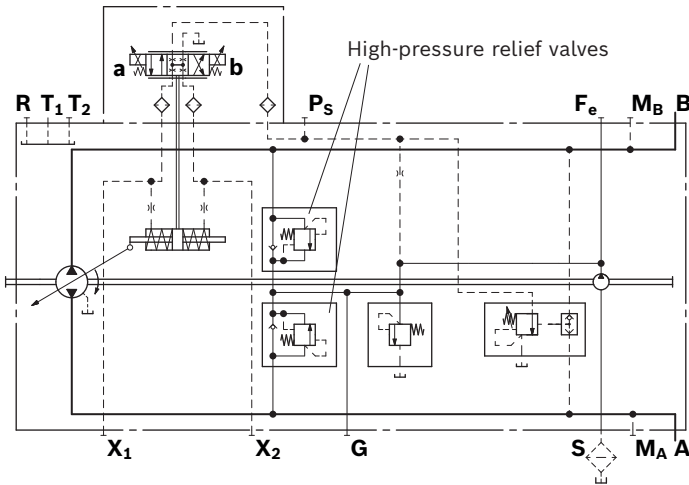


Example: Δp Drive design = 3900 psi (270 bar) ($p_{A, B} - p_{Sp}$)

Max. working pressure $p_{A, B}$	- Boost pressure p_{Sp}	+ Safety	= Differential pressure Δp_{HD}
4200 psi (290 bar)	- 290 psi (20 bar)	+ 435 psi (30 bar)	= 4350 psi (300 bar)

- ▶ Test pressure of the HD valve (at q_{V1}):
 $p_{max} = 4650$ psi (320 bar) ($p_{max} = \Delta p_{HD} + p_{Sp}$)

▼ Setting diagram

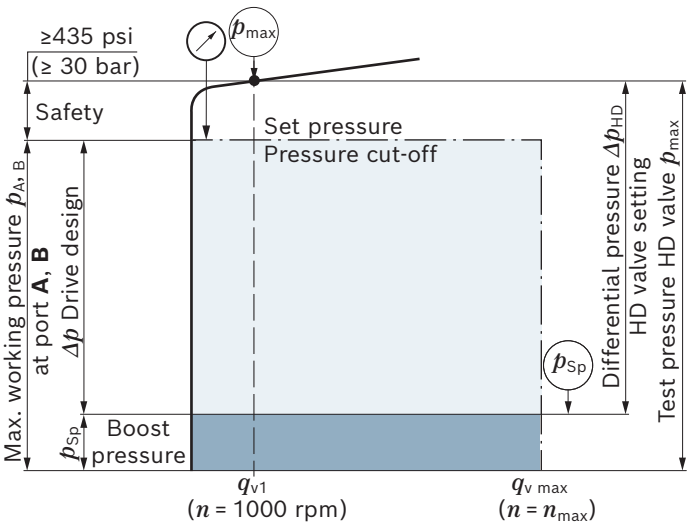

Key	
HD valve	High-pressure relief valve
Test pressure HD valve p_{max}	The factory-set pressure value set at q_{V1} .
Differential pressure HD valve Δp_{HD}	Test pressure HD valve (absolute) minus the boost pressure setting
Maximum working	The overall design of the hydrostatic drive is based on the maximum working pressure $p_{A, B}$. It comprises the boost pressure setting and the Δp drive design.
Δp drive design	Differential pressure value determining the available torque at the hydraulic motor ($p_{A, B} - p_{Sp}$).
Boost pressure p_{Sp}	Boost pressure setting of the boost-pressure relief valve
Safety	Required distance between maximum working pressure (and/or pressure cut-off) and test pressure of the high-pressure relief valve to prevent constant response of the high-pressure relief valves at maximum working pressure.

Notice

Upon response of the high-pressure relief valve, the permissible temperature and viscosity must be complied with.

1) Omitted with version without pressure cut-off

Bypass function

A connection between the two high-pressure passages **A** and **B** can be established using the bypass function (e.g. for machine towing).

► **Towing speed**

The maximum towing speed depends on the gear ratio in the vehicle and must be calculated by the vehicle manufacturer. The corresponding flow of $q_v = 7.9$ gpm (= 30 l/min) may not be exceeded.

► **Towing distance**

Only tow the vehicle out of the immediate danger zone. For further information on the bypass function, see the operating instructions.

Notice

The bypass function is not illustrated in the circuit diagrams.

Pressure cut-off

The pressure cut-off is a pressure control which, after reaching the set pressure, adjusts the displacement of the pump back to $V_{g \min}$.

This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.

The high-pressure relief valves provide protection against pressure peaks when the swashplate swivels quickly, and safeguard the maximum pressure in the system.


The setting range of the pressure cut-off may be anywhere within the entire working pressure range. However, it must at least be set 435 psi (30 bar) lower than the setting value of the high-pressure relief valves (see setting diagram, page 42).

The function of the pressure cut-off in combination with a DG control is described on page 18.


Please state the setting value of the pressure cut-off in plain text when ordering.

▼ Circuit diagram with pressure cut-off Electric control, EP_D

Sizes 28 and 45

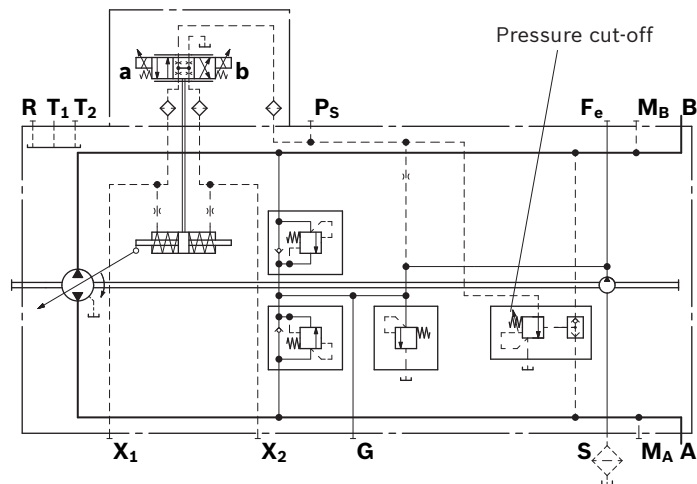

Size 63

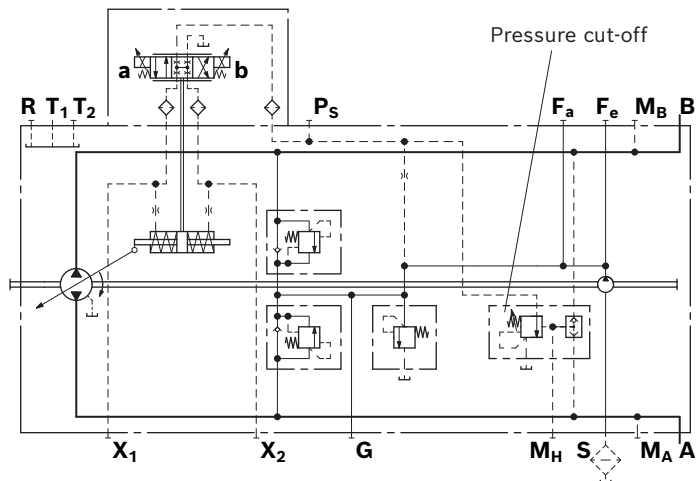


Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used. By means of two threaded pins, the stroke of the stroking piston, and thereby the maximum swivel angle of the pump, can be limited.


Notice
Threaded pins are mounted from the inside (screw-out protection) and can no longer be removed from the outside.

Dimensions

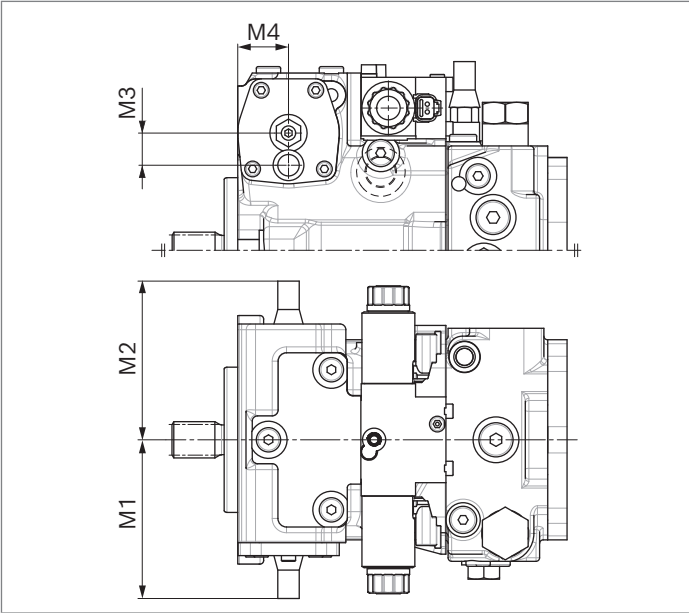

NG		M1	M2	M3	M4
45	in	max. 4.45	max. 4.45	0.89	1.40
	mm	max. 113	max. 113	22.5	35.5
63	in	max. 5.30	max. 5.37	1.04	1.69
	mm	max. 134.5	max. 136.5	26.5	43

▼ Circuit diagram sizes 63

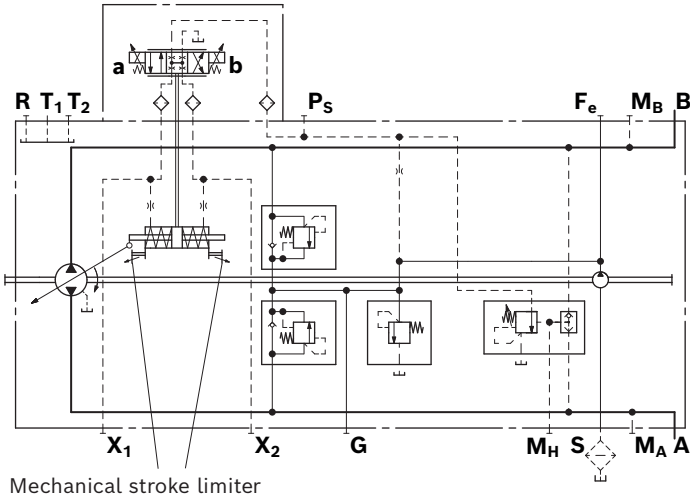


Measuring ports **M_A**, **M_B**, **M_H**


Standard port plate

The measuring ports **M_A**, **M_B** and **M_H** are designed based on ISO 11926 and designed for straight stud ends according to EN ISO 11926-2. The countersink may, however, be deeper than specified in the standard.

▼ Porting pattern

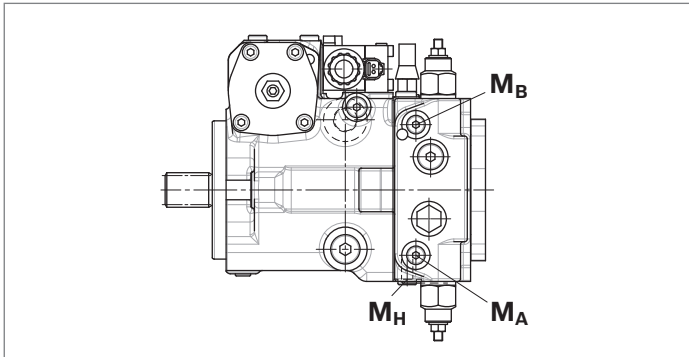

▼ Countersink of the measuring ports **M_A**, **M_B** and **M_H**

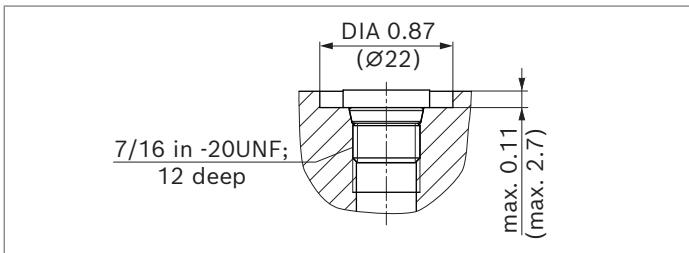

Notice

Measuring port **M_H** available on size 63 only

Filtration in the boost pump suction line


Version S

Filter version	Suction filter
Recommendation	With contamination indicator, with bypass
Recommended flow resistance at filter element	
At $v = 30 \text{ cSt}$, $n = n_{\max}$	$\Delta p = 1.5 \text{ psi}$ ($\Delta p = 0.1 \text{ bar}$)
At $v = 1000 \text{ cSt}$, $n = n_{\max}$	$\Delta p = 4.5 \text{ psi}$ ($\Delta p = 0.3 \text{ bar}$)
Pressure at suction port S	
Continuous $p_{S \min}$ ($v \leq 30 \text{ cSt}$)	$\geq 12 \text{ psi}$ (0.8 bar) absolute
Short-term, at a cold start ($t < 3 \text{ min}$)	$\geq 7.5 \text{ psi}$ (0.5 bar) absolute
Maximum pressure $p_{S \max}$	$\leq 75 \text{ psi}$ (5 bar) absolute


Use of version S is preferred.

The suction filter is not included in the scope of delivery.

▼ Circuit diagram sizes 28 and 45

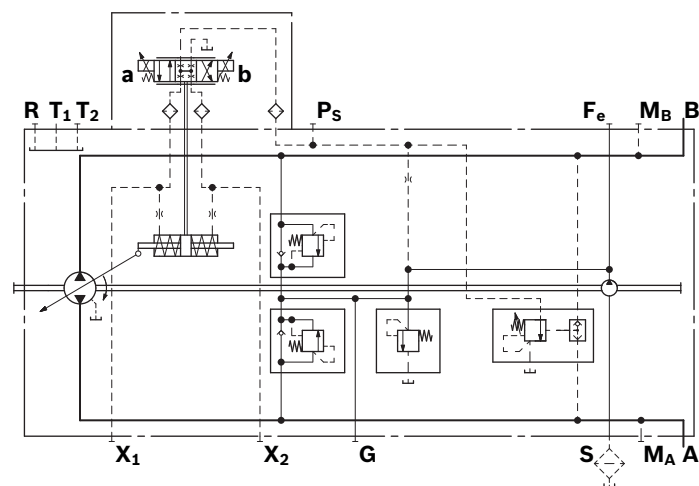

▼ Circuit diagram size 63

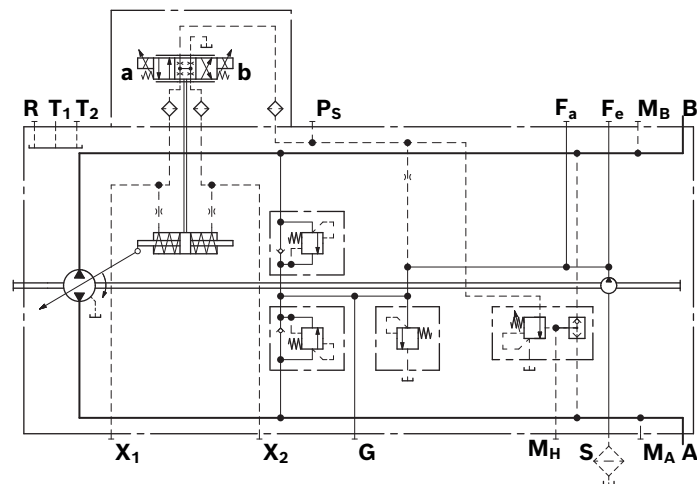

Filtration in the boost pump pressure line


Version D

Ports for external boost circuit filtration


Ports		
Boost pressure inlet	NG 28, 45	Port G (F_a)
	NG 63	Port F_a
Boost pressure output	Port F_e	
Filter version	Boost pressure filter	
Recommendation	With contamination indicator, with cold start valve	
Filter arrangement	Separate in the pressure line (inline filter)	

The boost pressure filter is not included in the scope of delivery.

▼ Circuit diagram sizes 28 and 45

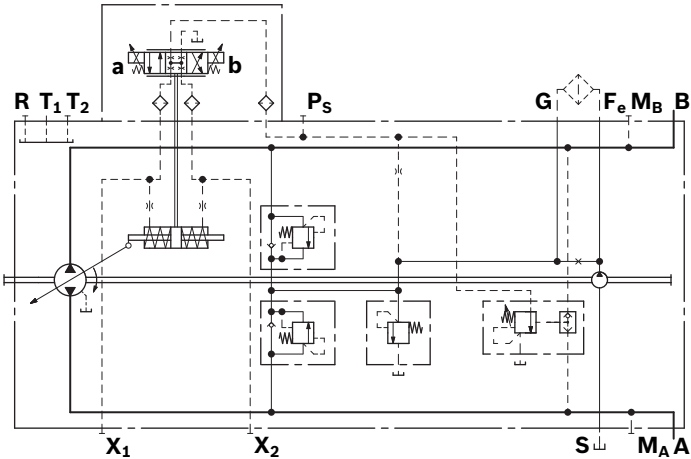

▼ Circuit diagram size 63

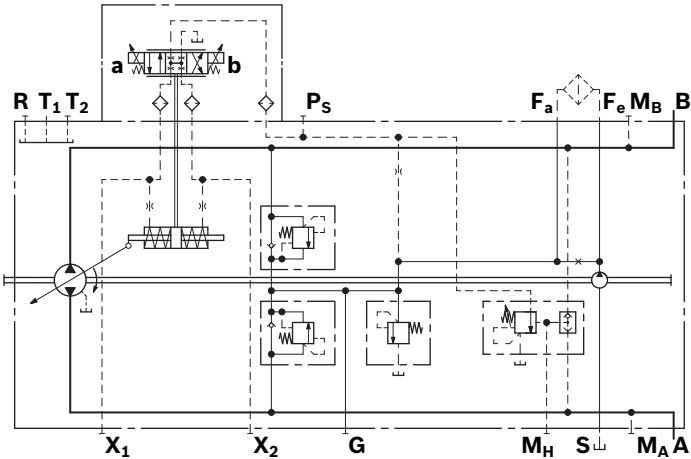

Notice

- ▶ No pressure filtration is possible with NG28 and 45 in connection with a DA control valve.
- ▶ For NG 28 and 45, port **G** serves as "boost pressure port inlet".
- ▶ Filters with bypass are **not recommended**, (exception DG, see below). Please contact us for applications with a bypass.
- ▶ On versions with DG control (with pilot pressure not from a boost circuit), a filter must be used that fulfills the requirements with regard to filtration of the hydraulic fluid (see page 5).
- ▶ The pressure drop at the filter is viscosity- and contamination-dependent. Note the maximum permissible pressure of the boost pump in combination with the set feed pressure.

External boost pressure supply

Version E

This variation should be used in variants without integrated boost pump (**N** and/or **K**).

With sizes 28, 45 and 63, port **S** is plugged and not permissible for external boost pressure supply.


▼ Boost pressure supply

Size	Port
28, 45 (without DA control valve)	G
28, 45 (with DA control valve)	F_e
63	F_a


The filter should be installed separately on port **F_a**, **F_e** or **G** before the boost pressure supply.

To ensure the functional reliability, maintain the required cleanliness level for the boost pressure fluid fed in at port **F_a**, **F_e** or **G** (see page 6).

▼ Circuit diagram size 28 and 45, boost pressure supply on port G

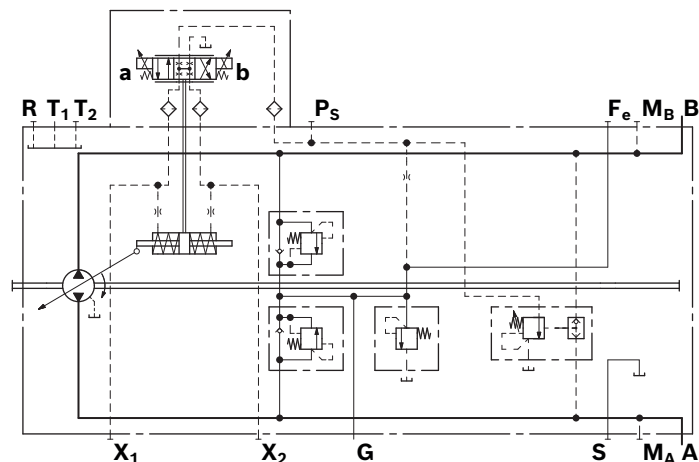

▼ Circuit diagram size 63, boost pressure supply at port F_a

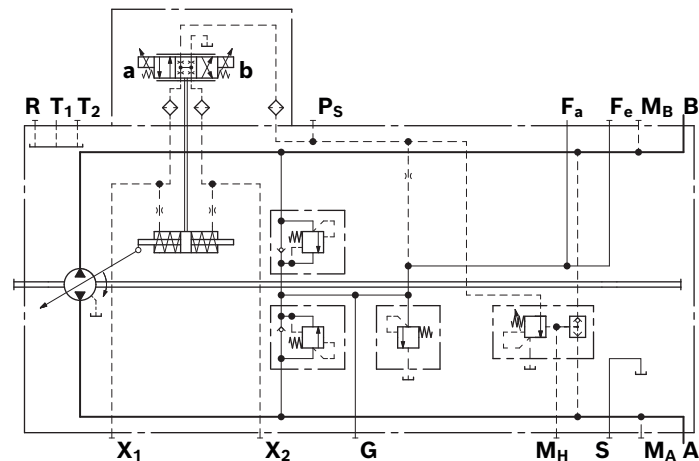

Connector for solenoids

DEUTSCH DT04-2P-EP04

- ▶ **P:** Molded, 2-pin, without bidirectional suppressor diode (standard).
- ▶ **Q:** Molded, 2-pole, with bi-directional suppressor diode (only for switching solenoids on control module EZ and DA)

The following type of protection ensues with the mounted mating connector:


- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

The protection circuit with bidirectional suppressor diode is needed to limit overvoltages. Overvoltages are caused by switching off the current with switches, relay contacts or by disconnecting the mating connector while voltage is applied.

▼ Switching symbol

without bidirectional suppressor diode

with bidirectional suppressor diode

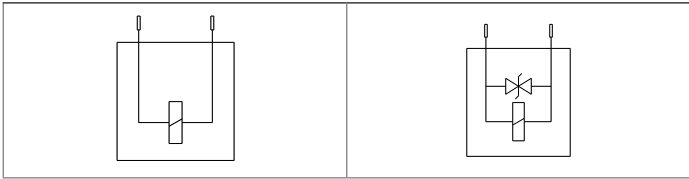

▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid body.
- ▶ The procedure is defined in the operating instructions.

Rotary inch valve

The rotary inch valve allows for any reduction of pilot pressure independently of drive speed, through mechanical actuation of the control lever. The control lever is equipped with an internal rotational limiter $\pm 90^\circ$ (drawing item **1** and **2**).

The valve is arranged separately from the pump and is connected to the pump by a hydraulic control line via port **P_S** (maximum line length: approx. 6.5 ft (2 m)). The rotary inch valve must be ordered separately.


Material number	Direction of actuation of the control lever	Throttle cross-section $\varnothing$
R902048734	Clockwise	0.18 (4.6)
R902048735	Counter-clockwise	0.18 (4.6)
R902070172	Clockwise	0.11 (2.7)
R902066994	Counter-clockwise	0.11 (2.7)

Notice


The rotary inch valve can be used regardless of the control module. If necessary, the position of the control lever can be changed.

▼ Circuit diagram

Hydraulic closed loop control, rotary speed dependent, DA with separately attached rotary inch valve

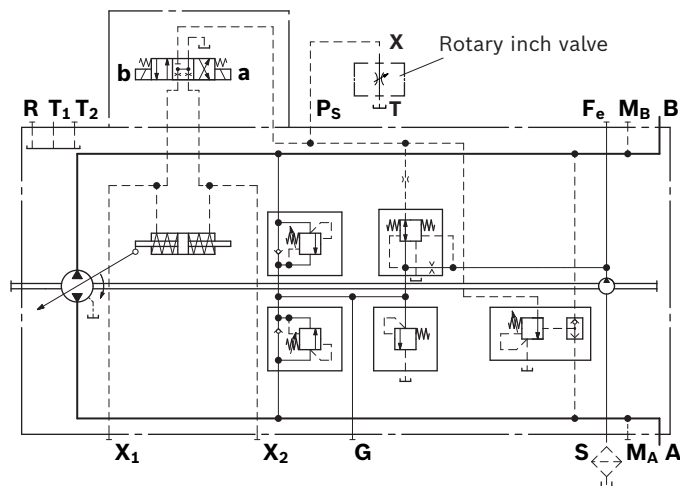

Dimensions

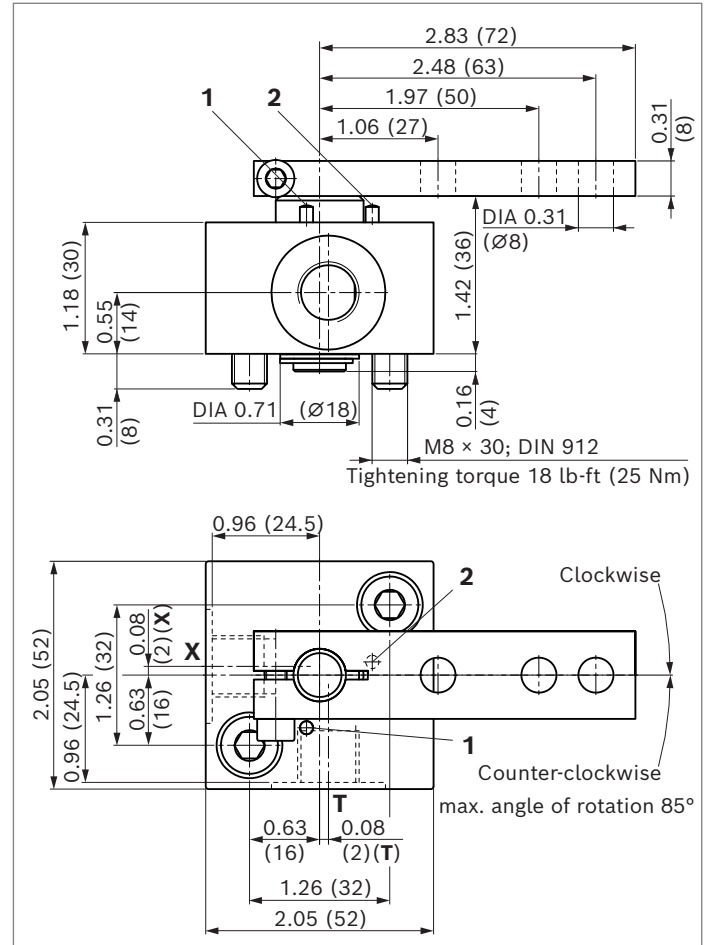

Notice

To prevent damage to the rotary inch valve, a positive mechanical stop of $\pm 85^\circ$ must be provided for the control lever on the customer side.

Ports		Standard ¹⁾	Size	$p_{\max}$ [psi (bar)] ²⁾	State ³⁾
X	Pilot pressure port	ISO 11926	9/16 in -18 UNF-2B; 0.51 (13) deep	580 (40)	O
T	Drain port	ISO 11926	9/16 in -18 UNF-2B; 0.51 (13) deep	45 (3)	O

1) The countersink may be deeper than specified in the standard.
Ports designed for straight stud ends according to EN ISO 9974-2 type E.

2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) O = Must be connected (plugged on delivery)


Flushing valve

The purpose of the flushing valve is to remove heat from the hydraulic circuit. Hydraulic fluid is flushed out via the flushing spool of the respective low-pressure side of the closed circuit, from a pressure differential between A and B of 45 psi (3 bar) and low pressure of 230 psi (16 bar). It is necessary to replace both the flushing flow and the internal leakage of the axial piston units with a boost pressure supply. The boost pressure supply with filtered and cooled hydraulic fluid lowers the circuit temperature. The flushing flow is determined by an orifice in the flushing valve. This depends on the orifice size, the pressure differential between the low pressure and the pressure in the drain line, as well as the viscosity. A pressure retention valve is also integrated in the flushing valve. As soon as the pressure level falls below the set retention pressure, e.g. due to excessive flushing flow or to excessively low rotational speeds, the pressure retention valve reduces the flushing flow and thus prevents impermissible pressure drops. The valve is mounted to the port plate.


▼ Permissible variants

Flushing valve		
Sealing material	NBR (nitrile rubber)	
Orifices	Orifice Ø	Theoretical flushing flow
	0.05 in (1.2 mm)	0.8 gpm (3.2 l/min)
	0.06 in (1.6 mm)	1.5 gpm (5.5 l/min)
	0.08 in (2.0 mm)	2.3 gpm (8.8 l/min)
	0.09 in (2.4 mm)	3.3 gpm (12.5 l/min)
	0.12 in (3.0 mm)	5.3 gpm (20 l/min)
Flushing side	A and B alternately, 45 to 75 psi (3 to 5 bar) switching pressure	
Flushing spool damping	medium	
Retention pressure	230 psi (16 bar)	

▼ Circuit diagram

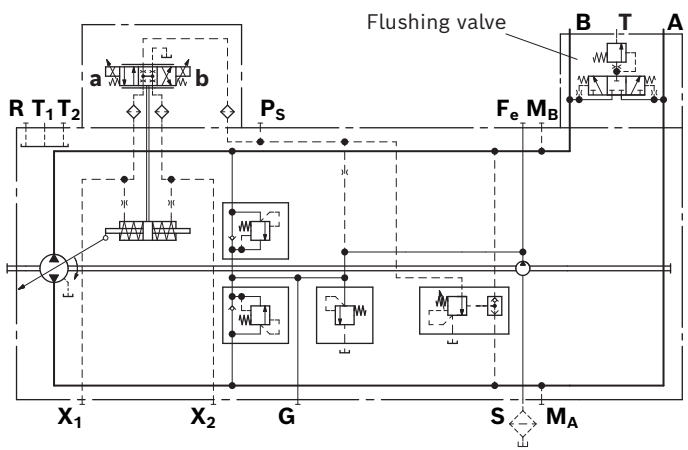

Dimensions

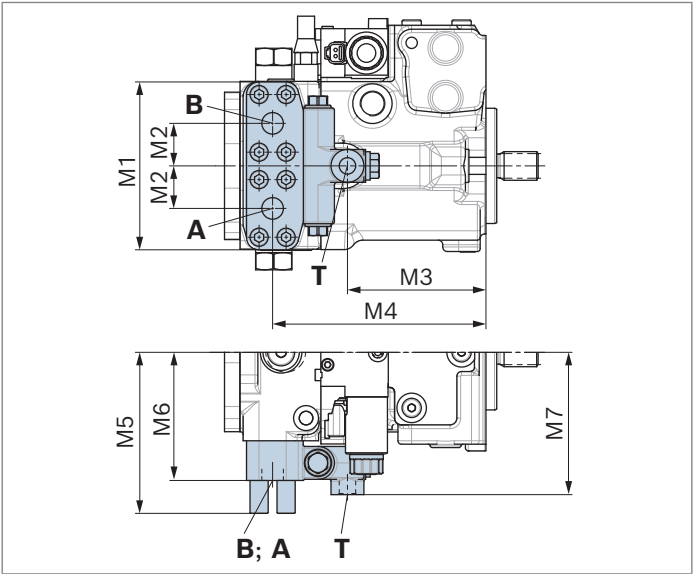

NG		M1	M2	M3	M4	M5	M6	M7
28	in	5.83	1.48	4.33	6.93	5.39	4.25	4.74
	mm	148	37.5	109.9	175.9	137	108	120.5
45	in	5.83	1.48	4.81	7.41	5.59	4.45	4.94
	mm	148	37.5	122.1	188.1	142	113	125.5
63	in	5.83	1.48	5.11	7.71	6.06	4.92	5.41
	mm	148	37.5	129.8	195.8	154	125	137.5

Installation dimensions for coupling assembly


To ensure that rotating components (coupling hub) and fixed components (housing, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the pump size and the splined shaft.

SAE splined shaft (spline according to ANSI B92.1a)

Splined shaft **S** and/or **T**

The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring d_2 in the area near the shaft collar (dimension $x_2 - x_3$).

Observe diameter of relief on size 28 and 45.

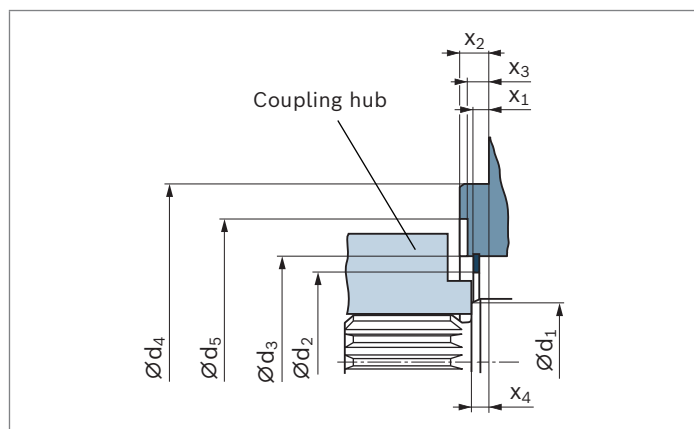

NG		d_1	$d_{2 \text{ min}}$	d_3	d_4	d_5	x_1	x_2	x_3	x_4
28	in	DIA1.32	DIA1.71	DIA2.165 ±0.004	DIA4.000 DIA3.998	DIA2.83	0.154 +0.008	0.374 -0.02	0.28	0.315 +0.035 -0.024
	mm	Ø33.5	Ø43.4	Ø55 ±0.1	Ø101.6 0 -0.054	Ø72	3.9 +0.2	9.5 -0.5	7	8 +0.9 -0.6
45	in	DIA1.52	DIA2.02	DIA2.480 ±0.004	DIA4.000 DIA3.998	DIA3.15	0.169 +0.008	0.374 -0.02	0.28	0.315 +0.035 -0.024
	mm	Ø38.5	Ø51.4	Ø63 ±0.1	Ø101.6 0 -0.054	Ø80	4.3 +0.2	9.5 -0.5	7	8 +0.9 -0.6
63	in	DIA1.52	DIA2.14	DIA2.677 ±0.004	DIA5.000 DIA4.998	–	0.276 +0.008	0.50 -0.02	–	0.315 +0.035 -0.024
	mm	Ø38.5	Ø54.4	Ø68 ±0.1	Ø127 0 -0.063	–	7.0 +0.2	12.7 -0.5	–	8 +0.9 -0.6

Installation instructions

General

The axial piston unit must be filled with hydraulic fluid and air bleed during commissioning and operation. This must also be observed during longer standstills, as the axial piston unit can empty itself via the hydraulic lines.

Particularly in the installation position "drive shaft upwards", filling and air bleeding must be carried out completely as there is e.g. a danger of dry running. The leakage in the housing area must be directed to the reservoir via the highest drain port (**T₁**, **T₂**).

For combination pumps, the leakage must be drained off at each single pump.

If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain lines must be laid.

To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g. reservoir, frame parts).

Under all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height h_s results from the total pressure loss; it must not, however, be higher than $h_{s\ max} = 31.5\ in\ (800\ mm)$.

The suction pressure at port **S** must also not fall below the minimum value of 12 psi (0.8 bar) absolute during operation (cold start 7.5 psi (0.5 bar) absolute).

When designing the reservoir, ensure that there is adequate distance between the suction line and the drain line. We recommend using a baffle (baffle plate) between suction line and drain line. A baffle improves the air separation ability as it gives the hydraulic fluid more time for desorption. Apart from that, this prevents the heated return flow from being drawn directly back into the suction line. The suction port must be supplied with filtered, cooled, calmed and degassed hydraulic fluid over a sufficient period of time.

Installation position

See the following examples 1 to 10.

Further installation positions are available upon request.

Recommended installation position: 1 and 2.

Notice


- For optimum function and dynamics of the axial piston unit, a complete filling of the two stroking chambers **X₁** and **X₂** with hydraulic fluid is required. By swiveling the swashplate several times during commissioning, this can usually be ensured. In case of unfavorable installation positions, air bleeding of the stroking chambers may take some time, so we recommend filling the stroking chambers via ports **X₁** and **X₂** before installation.
- In certain installation positions, an influence on the adjustment or control can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.
- If filling via the **F_e** connection is not possible, please contact your responsible contact person at Bosch Rexroth.

Key	
R	Air bleed port
S	Suction port
T₁, T₂	Drain port
X₁, X₂	Control pressure port
F_e	Boost pressure port output
SB	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
h_{min}	Minimum required distance to reservoir bottom (100 mm)
$h_{s\ max}$	Maximum permissible suction height (800 mm)


Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.


▼ Installation position 1

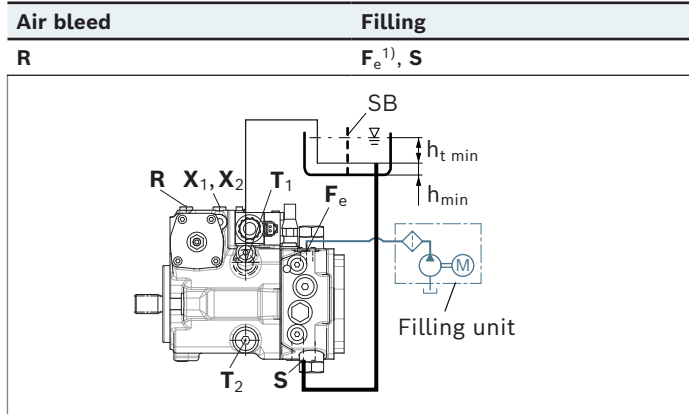


▼ Installation position 4

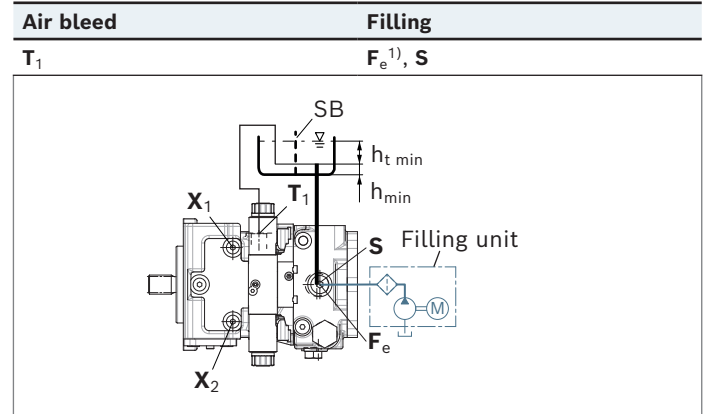


▼ Installation position 2

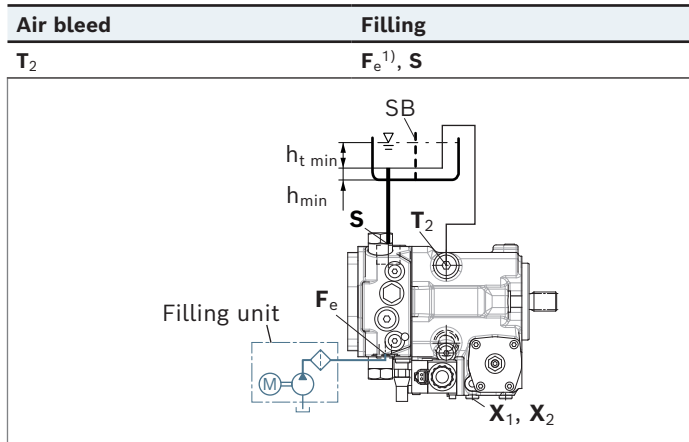

▼ Installation position 5

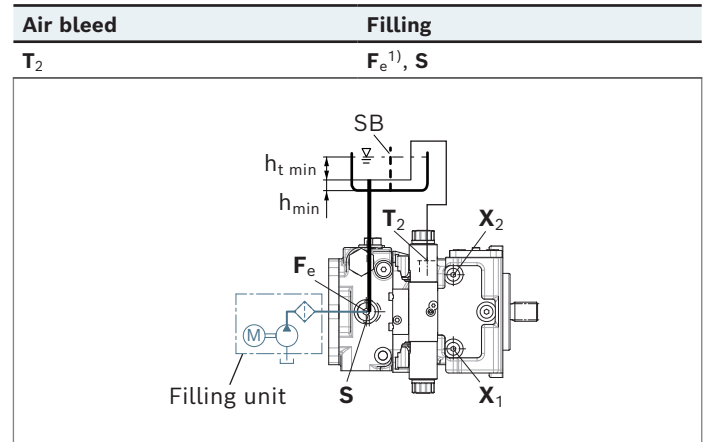

▼ Installation position 3

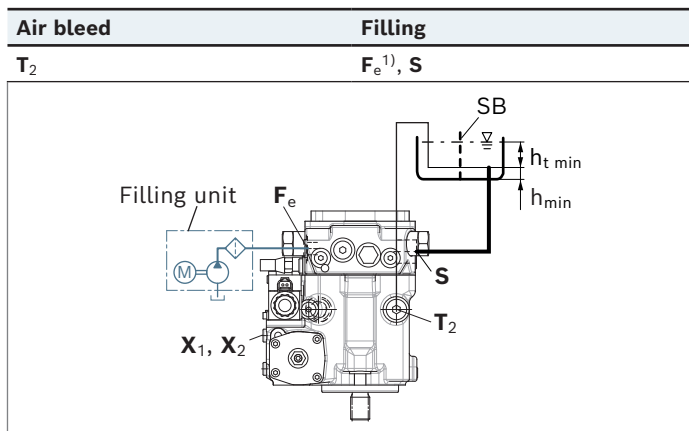


1) Recommendation: Filling with filter/filling unit.
When filling without filter/filling unit, the pump must be filled at the highest drain port.

Above-reservoir installation


Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Observe the maximum permissible suction height
 $h_{S \max} = 800 \text{ mm}$.


▼ **Installation position 6**

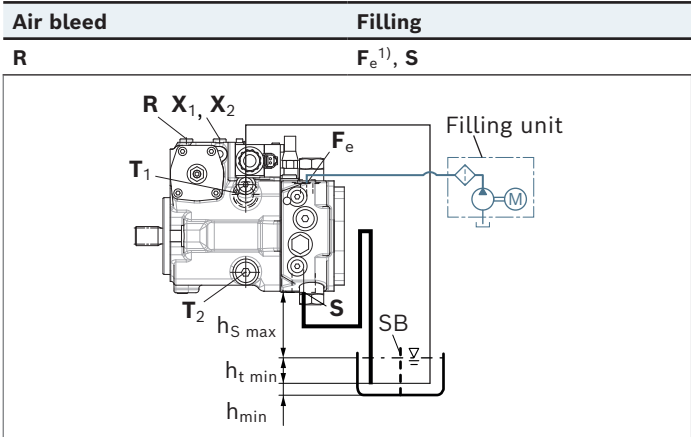


▼ **Installation position 9**

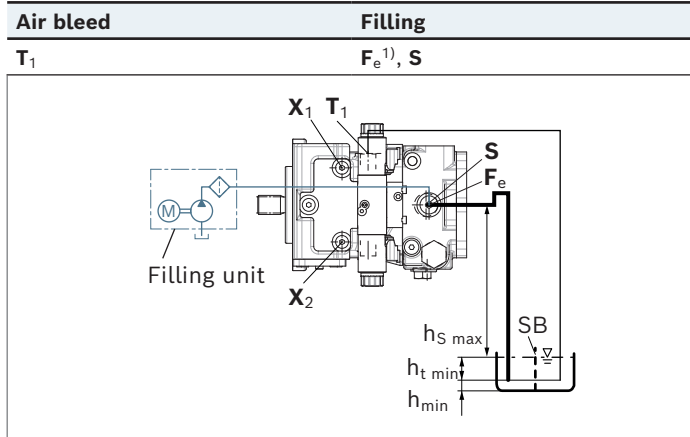


▼ **Installation position 7**

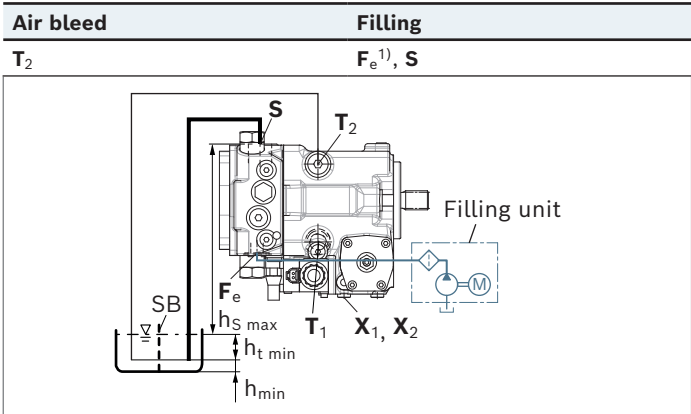

▼ **Installation position 10**

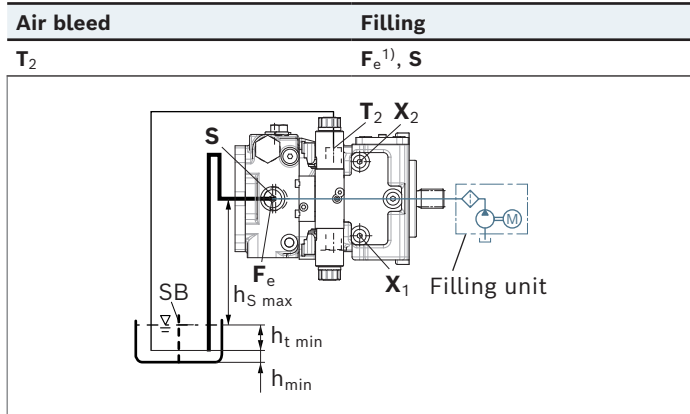

▼ **Installation position 8**

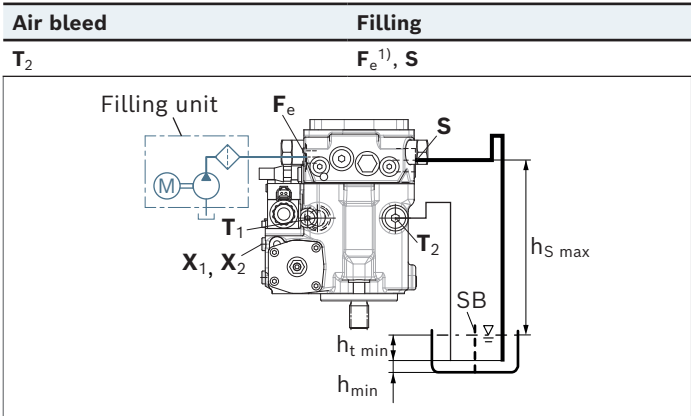

1) Recommendation: Filling with filter/filling unit.
When filling without filter/filling unit, the pump must be filled at the highest drain port.

Project planning notes

- ▶ The pump is intended for use in a closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding operating instructions completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservation protection for a maximum of 12 months. If longer preservation protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the operating instructions.
- ▶ Not all configuration variants of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF_D) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. Applying a direct voltage signal (DC) to solenoids does not create electromagnetic interference (EMI) nor is the solenoid affected by EMI. Electromagnetic interference (EMI) potential exists when operating and controlling a solenoid with a modulated direct voltage signal (e.g. PWM signal). Appropriate testing and measures should be taken by the machine manufacturer to ensure other components or operators (e.g. those with pacemaker) are not affected by this potential.
- ▶ Pressure cut-off (hydraulic or electronic) is not a sufficient safeguard against pressure overload. Therefore, a pressure relief valve must be added to the hydraulic system (integrated into the pump or externally in the system). Observe the technical limits of the pressure relief valves here.
- ▶ With dynamic power flow (change of pumps to operation as a motor) a maximum of 95% $V_{g \max}$ is permissible. We recommend configuring the software accordingly.
- ▶ Please note that a hydraulic system is an oscillating system. This can lead, for example, to the stimulation the natural frequency within the hydraulic system during operation at constant rotational speed over a long period of time. The excitation frequency of the pump is 9 times the rotational speed frequency. This can be prevented, for example, with suitably designed hydraulic lines.
- ▶ Please note the details regarding the tightening torques of port threads and other screw connections in the operating instructions.
- ▶ The ports and fastening threads are designed for the $p_{\max}$ permissible pressures of the respective ports, see the connection tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The service ports and function ports are only intended to accommodate hydraulic lines.

Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk.

The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.

- ▶ Moving parts in high-pressure relief valves may in certain circumstances become stuck in an undefined position due to contamination (e.g. impure hydraulic fluid). This can result in restriction or loss of load-holding functions in lifting winches. The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to keep the load in a safe position and ensure they are properly implemented.

Related documentation

Product-specific documentation

Document type	Title	Document number
Operating instructions	Axial piston variable pump A10VG series 10	92750-01-B
Data sheet	Storage and preservation of axial piston units	90312

Documentation for mounted components

Document type	Title	Document number
Data sheet	Proportional pressure reducing valve FTDRE 2 K	58032
	Pressure sensor PR4	95156
	Flushing valve with pressure retention valve SV	95512

Documentation for hydraulic fluids

Document type	Title	Document number
Data sheet	Hydraulic fluids based on mineral oils and related hydrocarbons	90220
	Environmentally acceptable hydraulic fluids	90221
	Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)	90222
	Axial piston units for operation with fire-resistant hydraulic fluids (HFDR, HFDU, HFA, HFB, HFC, HFC-E)	90225
	Rating of hydraulic fluids used in Rexroth hydraulic components (pumps and engines)	90235
	Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)	90245

Bosch Rexroth Corporation
8 Southchase Court
Fountain Inn, SC 29644-9018
USA
Telephone (864) 967-2777
Facsimile (864) 962-5338
www.boschrexroth-us.com

© Bosch Rexroth AG 1999. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.