
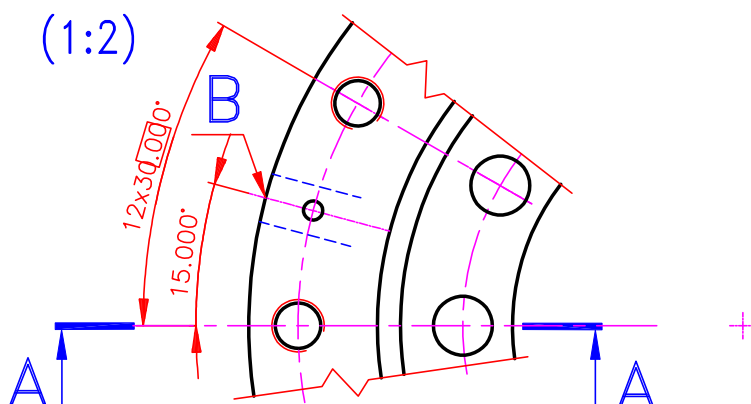


A—A

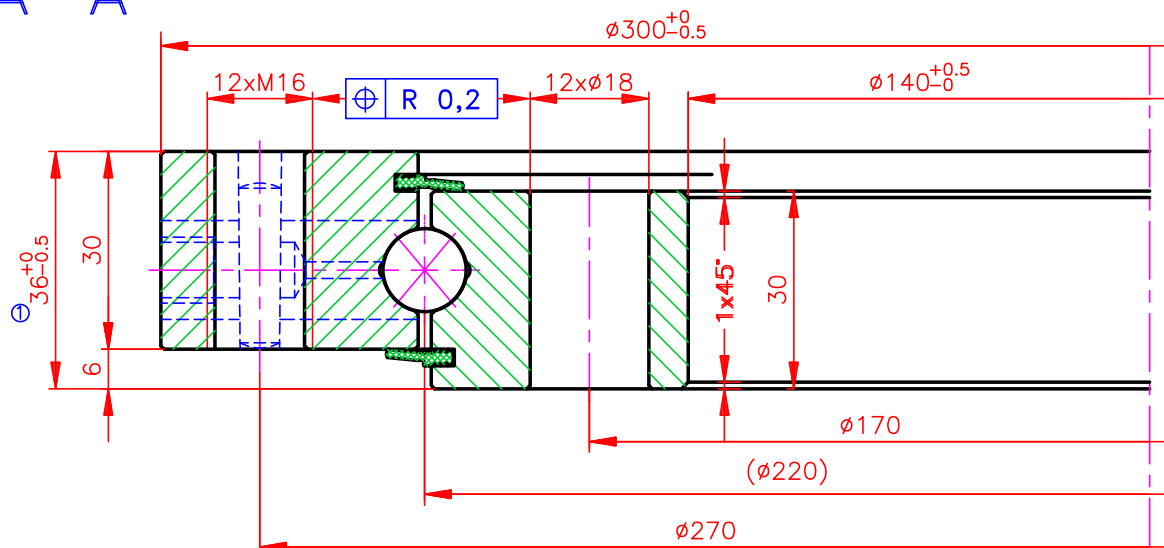

⊗ ⊗ — MATERIAL RINGS —STEEL STN 41 4209 (eqv.100CrMn6)

- AXIAL CLEARANCE: 0,06 mm
- RADIAL CLEARANCE: 0,03 mm
- THE BEARING WILL BY FILLED WITH THE SOLID LUBRICANT ON THE LITHIUM BASE
- WORK TEMPERATURE TO 120°C)
- B — PLUG

Zmeny Changes	2	Zmena č.133	24.6.96	Zmeny Changes			
	1	Zmena č.101	10.8.95				
Index	Predtým Before	Teraz Now	Dát—Podp Date—Name	Index	Predtým Before	Teraz Now	Dát—Podp Date—Name
Mierka: Scale:	1:1 (1:2)	Kreslil: Drawn by:	STOKLASA 16.2.1999	Schválil: Approved by:	BARTOŠ 16.2.1999	Hmotnosť: Mass:	~11,3 kg
 PSL a.s., POVAŽSKÁ BYSTRICA SLOVAKIA	Názov — označenie: Title — designacion: JEDNORADOVÉ GUĽKOVÉ LOŽISKO SO ŠTVORBODOVÝM STYKOM SINGLE ROW BALL FOUR-POINT CONTACT BEARING 90-1B13-0220-0318				Číslo výkresu: Drawing No: 9-0318-PV		Ind. zm.: 2