


AVVOLGITUBO GEMELLATO A 4 VIE IDRAULIC 4 PORT HOSE REEL

ENROULEUR HYDRAULIQUE À 4 TUYAUX 4-FACH-SCHLAUCHROLLE


A4.12

Max flow rate: 40 l/min
 Working pressure: standard 300 bar
 optional 400 bar
 Max hose speed: 30 m/min
 Temperature range: -20/+80°C
 Optional temperature range: -40/+80°C

A4D400=modello destro/right model
 A4S400=modello sinistro/left model

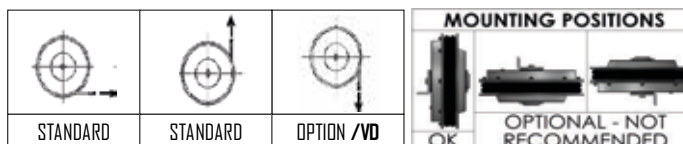

Corsa verticale verso il basso opzionale = CODICE/VD
 Vertical downwards is optional = CODE/VD

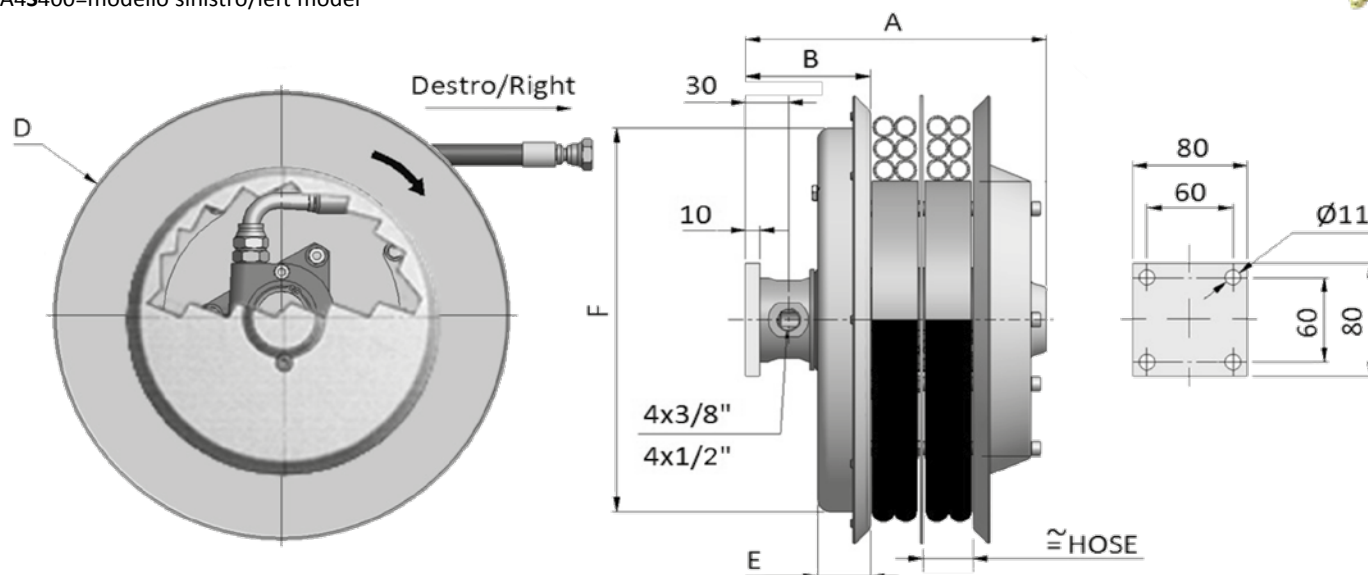

Disegno tecnico disponibile a richiesta
 Technical drawing available on request



Disponibile a richiesta conforme Atex II 2G
 Available on request Atex II 2G compliant



Modello destro Right model	A	B	D	E	F	Senza tubo Without hose		Ø	Con tubo - with hose					
	mm					kg			Lungh.totale Total length	Lungh. utile Usable length	R8 XX=R8	B1 XX=B1	T2 XX=T2	B2 XX=B2
									m	m				
A4D296.12.XX	252	129	295	37	291	21		1/2"	1.5	1.2				
A4D321.12.XX	252	129	325	37	272	23		1/2"	2.5	2.2				
A4D341.12.XX	252	129	340	37	272	25		1/2"	2.5	2.2				
A4D370.12.XX	252	129	370	37	272	30		1/2"	3.5	3.2				
A4D400.12.XX	252	129	400	47	272	33		1/2"	4.5	4.2				
A4D420.12.XX	252	129	420	47	322	35		1/2"	4.7	4.2				
A4D470.12.XX	252	129	478	47	322	38		1/2"	7.5	7.0				
A4D520.12.XX	252	129	520	47	422	45		1/2"	9.0	8.5				
A4D570.12.XX	252	129	570	47	422	50		1/2"	10.7	10.2				
A4D600.12.XX	252	129	620	47	422	63		1/2"	12.5	12.0				
A4D650.12.XX	252	129	650	47	422	75		1/2"	14.5	14.0				
A4D700.12.XX	252	129	720	47	532	-		1/2"	16.0	15.5				
A4D800.12.XX	252	129	820	57	532	87		1/2"	21.0	20.0				