
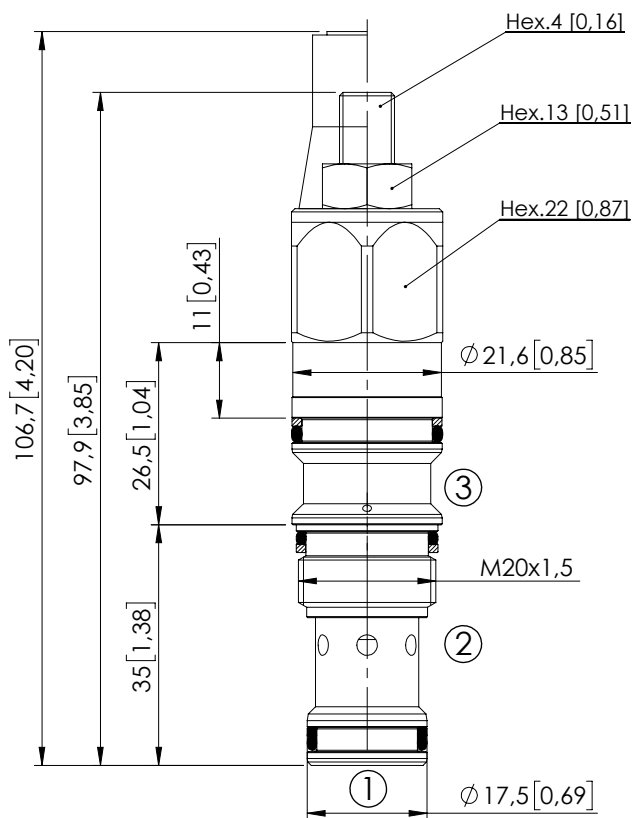


OVERCENTRE VALVE

CBSN-060-DSRR

POPPET TYPE
DIFFERENTIAL AREA

Dimensions: mm [inches]



SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	60 l/min (16 gpm)
Cavity:	VP000161 (SUN T-11A)
Weight:	0,18 kg (0,4 lbs)
Installation torque:	40 - 50 Nm (30 - 37 ft-lb)
Seal kit:	RC700161
Contamination class to ISO 4406:	See technical spec.
MTTFd:	150 - 1200 years: See technical spec.


NOTES

Setting: at least 1.3 times the load induced pressure.


Turn clockwise to increase the setting.

For other configurations/quick codes not available in this catalogue page please consult factory

SEALING CAP

Ordering code:
AT000020

CURVES

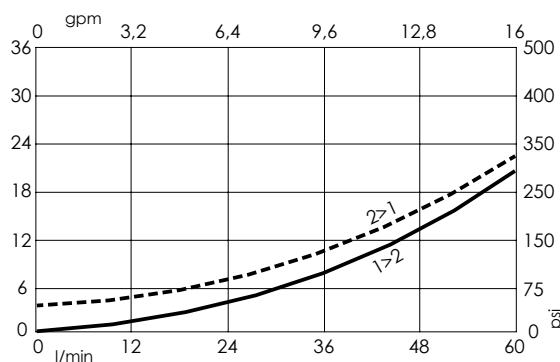

ORDERING CODES

Quick code	Description	Pilot ratio	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
CB000024	CBSN-060-DSRR-03-161-N350	3:1	350 bar (5000 psi)	140-350 bar (2000-5000 psi)	197 bar/turn (2900 psi/turn)
CB000034	CBSN-060-DSRR-03-161-N200	3:1	200 bar (2900 psi)	70-210 bar (1000-3000 psi)	147 bar/turn (2100 psi/turn)
CB000072	CBSN-060-DSRR-08-161-N350	8:1	350 bar (5000 psi)	140-350 bar (2000-5000 psi)	93 bar/turn (1300 psi/turn)
CB000073	CBSN-060-DSRR-08-161-N200	8:1	200 bar (2900 psi)	70-210 bar (1000-3000 psi)	55 bar/turn (800 psi/turn)