

CLAMSHELL BUCKETS CLA-L · CLA-MR

HANDLING OF SAND AND LOOSE MATERIALS

COMPATIBLE WITH




EXCAVATORS
TRUCK CRANES




CLA-L closed side walls




TECHNICAL DESIGN

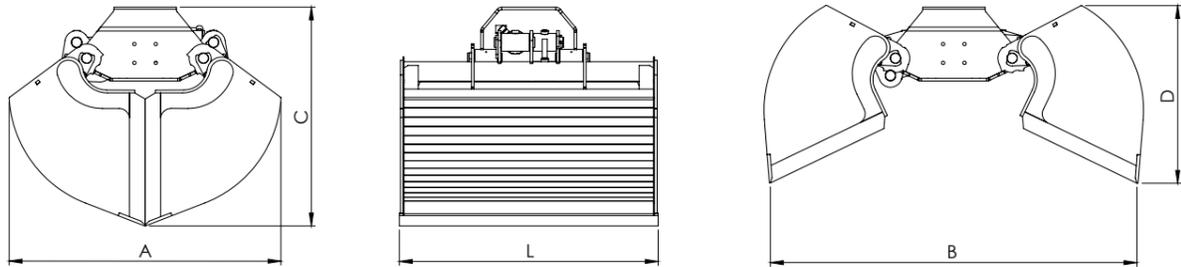

CLA-MR open side walls

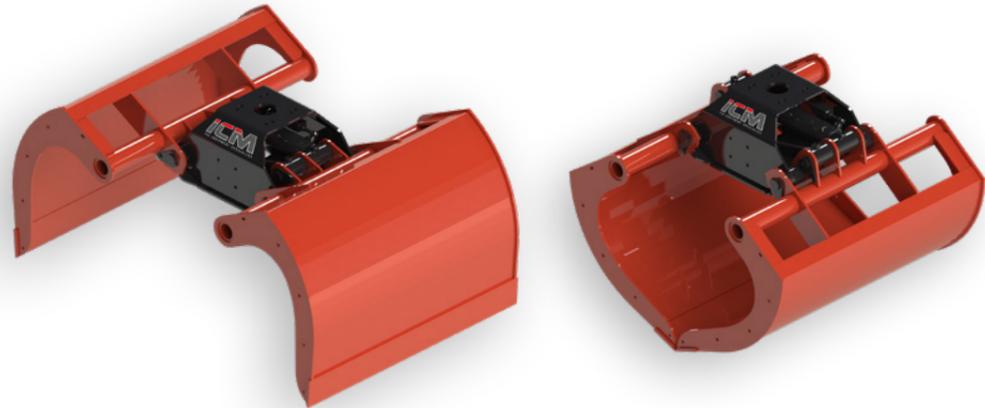

TECHNICAL DESIGN

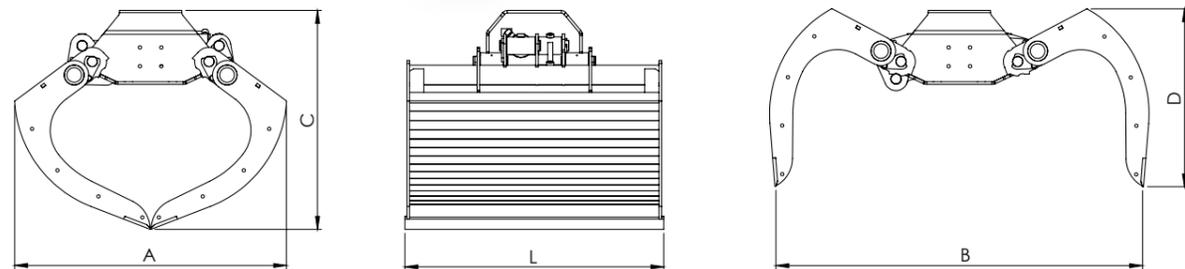

EXCAVATORS	TON	1-2		2- 3,5			3,5 - 5		
MODEL		CLA-L 126	CLA-MR 126	CLA-L 206	CLA-MR 206	CLA-L 321	CLA-MR 321	CLA-L 401	CLA-MR 401
SIDE WALLS		CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN
CAPACITY (MAXLOAD)	lt (kg)	110 (220)	110 (220)	180 (360)	180 (360)	320 (640)	320 (640)	400 (800)	400 (800)
WEIGHT	kg	168	155	192	179	210	192	230	212
CLAMPING FORCE	daN	1850	1850	1850	1850	1740	1740	1740	1740
MAX PRESSURE	bar	250	250	250	250	250	250	250	250
A	mm	860	860	860	860	1050	1050	1050	1050
B	mm	1150	1150	1150	1150	1413	1413	1413	1413
C	mm	699	699	699	699	844	844	844	844
D	mm	616	616	616	616	685	685	685	685
L	mm	500	500	800	800	800	800	1000	1000

OPTIONAL



RECOMMENDED HYDRAULIC ROTATORS - All available rotators are on page 38-42

	GR30PF	GR30PF	GR30PF	GR30PF	GR 465	GR 465	GR 465	GR 465
--	--------	--------	--------	--------	--------	--------	--------	--------



DOUBLE SWINGING LINK



BOLT-ON SIDE WALLS Only for CLA-MR



WELDED TEETH



BOLTED HOOK