

CLAMSHELL BUCKETS CLA-S · CLA-SR

HANDLING OF LOOSE MATERIAL,
MUD RUBBLE, DIGGING

COMPATIBLE WITH




EXCAVATORS
TRUCK CRANES



CLA-S closed side walls




TECHNICAL DESIGN

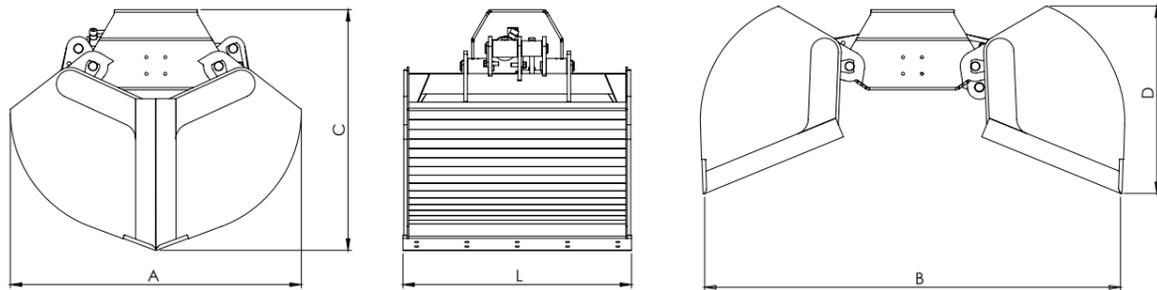

CLA-SR open side walls



TECHNICAL DESIGN

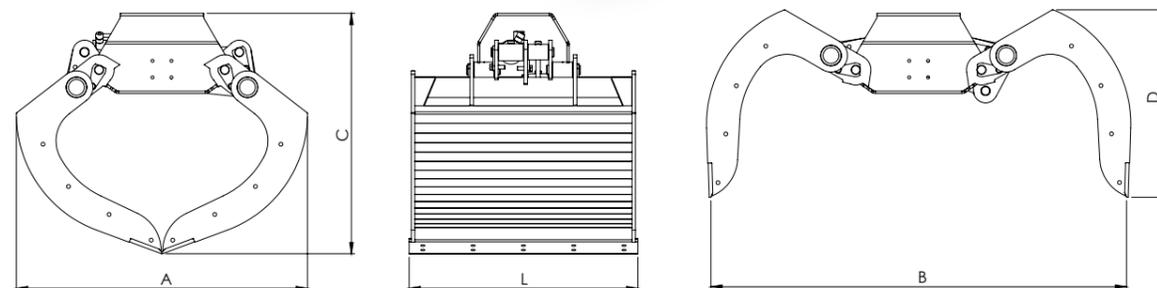

EXCAVATORS	TON	4 - 6		6 - 8		8 - 12		12 - 16	
MODEL		CLA-S 303	CLA-SR 303	CLA-S 403	CLA-SR 403	CLA-S 503	CLA-SR 503	CLA-S 653	CLA-SR 653
SIDE WALLS		CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN
CAPACITY (MAX LOAD)	lt (kg)	370 (2000)	370 (2000)	480 (2500)	480 (2500)	610 (3000)	610 (3000)	730 (3000)	730 (3000)
WEIGHT	kg	356	316	380	340	410	370	440	400
CLAMPING FORCE	daN	2500	2500	2500	2500	2500	2500	2500	2500
MAX PRESSURE	bar	250	250	250	250	250	250	250	250
A	mm	1272	1272	1272	1272	1272	1272	1272	1272
B	mm	1818	1818	1818	1818	1818	1818	1818	1818
C	mm	1051	1051	1051	1051	1051	1051	1051	1051
D	mm	818	818	818	818	818	818	818	818
L	mm	640	640	800	800	1000	1000	1200	1200

OPTIONAL



RECOMMENDED HYDRAULIC ROTATORS - All available rotators are on page 38-42

GR 465	GR 465	GR603DB	GR603DB	GR104DB	GR104DB	GR16S	GR16S



DOUBLE SWINGING LINK



BOLT-ON SIDE WALLS Only for CLA-MR



WELDED TEETH



BOLTED HOOK