

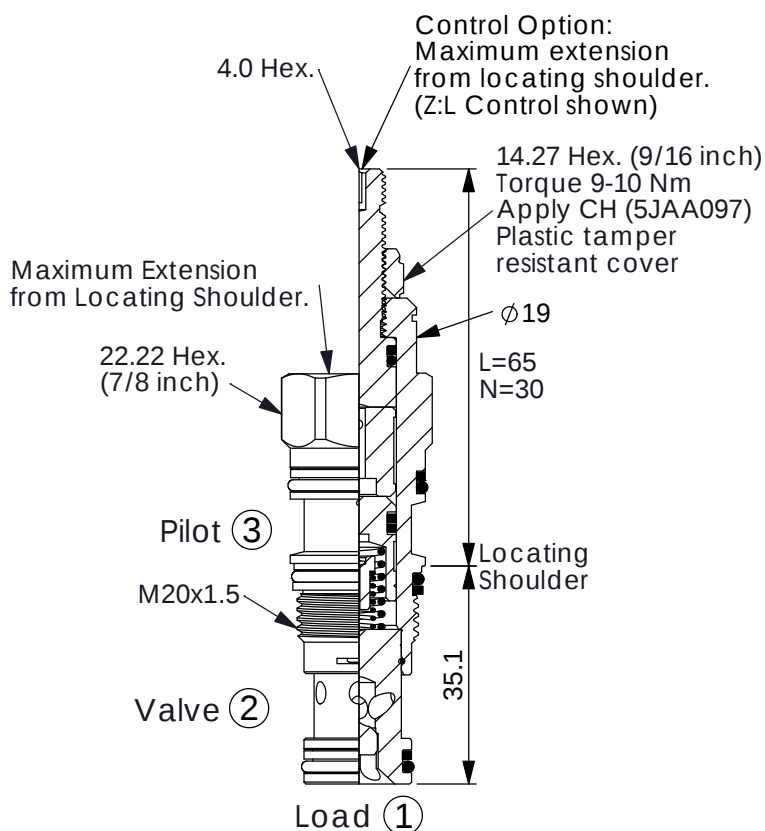


Ordering Code: **CO-11A-X-Y-Z**

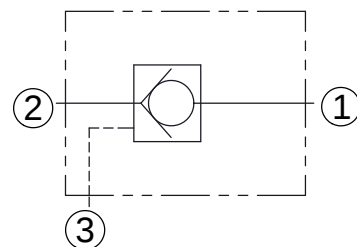

UNIT:mm

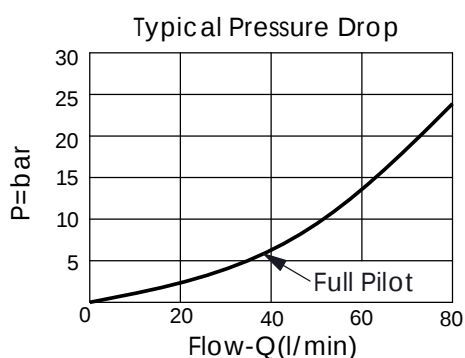

TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	60 l/min
Cavity-Tooling:	11A-3
Installation torque:	40-50 Nm
Weight:	0.13 (Z=N,NP) kg 0.16 (Z=L) kg

X	OPERATION
30	2 to 1 (Free Flow) Pilot Ratio 3:1
3C	2 to 1 (Free Flow) Sealed Pilot Piston Pilot Ratio 3:1
3D	2 to 1 (Free Flow) Sealed Pilot Piston Pilot Ratio 4.2:1

Z	OPTION
N	Non-adjustable 
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal) 
L	Leakproof hex. socket screw. 

Y	SPRINGS
	Cracking pressure
01	0.1 bar
03	0.3 bar
10	1.0 bar
20	2.0 bar
35	3.5 bar
50	5.0 bar
70	7.0 bar