

## Contents

## Solenoid Valves

|                                      | SERIES | CAVITY | DESCRIPTION | FLOW<br>LPM/GPM | PRESSURE<br>BAR/PSI | PAGE NO. |
|--------------------------------------|--------|--------|-------------|-----------------|---------------------|----------|
| <b>CV</b><br>Check<br>Valves         |        |        |             |                 |                     |          |
| <b>SH</b><br>Shuttle<br>Valves       |        |        |             |                 |                     |          |
| <b>LM</b><br>Load/Motor<br>Controls  |        |        |             |                 |                     |          |
| <b>FC</b><br>Flow<br>Controls        |        |        |             |                 |                     |          |
| <b>PC</b><br>Pressure<br>Controls    |        |        |             |                 |                     |          |
| <b>LE</b><br>Logic<br>Elements       |        |        |             |                 |                     |          |
| <b>DC</b><br>Directional<br>Controls |        |        |             |                 |                     |          |
| <b>MV</b><br>Manual<br>Valves        |        |        |             |                 |                     |          |
| <b>SV</b><br>Solenoid<br>Valves      |        |        |             |                 |                     |          |
| <b>PV</b><br>Proportional<br>Valves  |        |        |             |                 |                     |          |
| <b>CE</b><br>Coils &<br>Electronics  |        |        |             |                 |                     |          |
| <b>BC</b><br>Bodies &<br>Cavities    |        |        |             |                 |                     |          |
| <b>TD</b><br>Technical<br>Data       |        |        |             |                 |                     |          |

|                                                                 |             |            |                                         |        |          |           |
|-----------------------------------------------------------------|-------------|------------|-----------------------------------------|--------|----------|-----------|
| <b>HIGH FLOW VALVE FAMILY</b>                                   |             |            |                                         |        |          |           |
| <i>See individual catalog pages for exact specifications.</i>   |             |            |                                         |        |          |           |
| <b>2 WAY SPOOL TYPE</b>                                         |             |            |                                         |        |          |           |
|                                                                 | GS02 22*    | 2X / C09-2 | 2 Position, 2 Way, N.C. Spool           | 19/5   | 350/5000 | SV7-SV8   |
|                                                                 | GS02 27*    | 2X / C09-2 | 2 Position, 2 Way, N.O. Spool           | 19/5   | 350/5000 | SV9-SV10  |
| <i>*These valves fit the C09-2 Parker cavity.</i>               |             |            |                                         |        |          |           |
| <b>4 WAY, 2 POSITION SPOOL TYPE</b>                             |             |            |                                         |        |          |           |
|                                                                 | GS02 42     | C08-4      | 2 Position, 4 Way                       | 19/5   | 350/5000 | SV11-SV12 |
| <b>2 WAY POPPET TYPE</b>                                        |             |            |                                         |        |          |           |
|                                                                 | ☆ DSL081    | C08-2      | 2 Position, 2 Way, N.C. or N.O.         | 30/8   | 250/3600 | SV13-SV14 |
|                                                                 | ☆ DSH081    | C08-2      | 2 Position, 2 Way, N.C. or N.O.         | 30/8   | 350/5000 | SV15-SV16 |
|                                                                 | ☆ DSL101    | C10-2      | 2 Position, 2 Way, N.C. or N.O.         | 60/15  | 250/3600 | SV17-SV18 |
|                                                                 | ☆ DSH101    | C10-2      | 2 Position, 2 Way, N.C. or N.O.         | 60/15  | 350/5000 | SV19-SV20 |
|                                                                 | DSH121      | C12-2      | 2 Position, 2 Way, N.C. or N.O.         | 90/24  | 350/5000 | SV21-SV22 |
|                                                                 | DS161       | C16-2      | 2 Position, 2 Way, N.C. or N.O.         | 150/40 | 210/3000 | SV23-SV24 |
|                                                                 | ☆ DSH161*   | C16-2      | 2 Position, 2 Way, N.C. or N.O.         | 150/40 | 350/5000 | SV25-SV26 |
|                                                                 | DS201       | C20-2      | 2 Position, 2 Way, N.C. or N.O.         | 260/70 | 210/3000 | SV27-SV28 |
|                                                                 | ☆ DSL201*   | C20-2      | 2 Position, 2 Way, N.C. or N.O.         | 260/70 | 250/3600 | SV29-SV30 |
| <i>*The DSH161 and DSL201 will be available January 1, 2011</i> |             |            |                                         |        |          |           |
|                                                                 | GH02 01     | C08-2      | 2 Position, 2 Way, N.C., with Flow Adj. | 11/3   | 285/4000 | SV31-SV32 |
|                                                                 | GS02 72/73  | C08-2      | Bi-Directional Poppet, N.C.             | 1.7/45 | 210/3000 | SV33-SV34 |
|                                                                 | GS02 80*/81 | C08-2      | Bi-Directional Poppet, N.C.             | 58/15  | 350/5000 | SV35-SV36 |
|                                                                 | GS04 80*/81 | 2R         | Bi-Directional Poppet, N.C.             | 76/20  | 350/5000 | SV37-SV38 |
|                                                                 | GS06 80*/81 | C16-2      | Bi-Directional Poppet, N.C.             | 285/75 | 350/5000 | SV39-SV40 |
|                                                                 | GS02 77/78  | C08-2      | Bi-Directional Poppet, N.O.             | 1.7/45 | 210/3000 | SV41-SV42 |
|                                                                 | GS02 85*/86 | C08-2      | Bi-Directional Poppet, N.O.             | 58/15  | 350/5000 | SV43-SV44 |
|                                                                 | GS04 85*/86 | 2R         | Bi-Directional Poppet, N.O.             | 76/20  | 350/5000 | SV45-SV46 |
|                                                                 | GS06 85*/86 | C16-2      | Bi-Directional Poppet, N.O.             | 285/75 | 350/5000 | SV47-SV48 |
| <i>*210/3000 psi rating</i>                                     |             |            |                                         |        |          |           |

☆ Denotes New Winner's Circle Product Line.



## Contents

## Solenoid Valves

|                                                                                     | SERIES                              | CAVITY | DESCRIPTION       | FLOW<br>LPM/GPM | PRESSURE<br>BAR/PSI | PAGE NO.    |
|-------------------------------------------------------------------------------------|-------------------------------------|--------|-------------------|-----------------|---------------------|-------------|
|    | <b>2 WAY SPOOL TYPE</b>             |        |                   |                 |                     |             |
|                                                                                     | ☆ DSL082                            | C08-2  | 2 Position, 2 Way | 15/4            | 250/3600            | SV49-SV50   |
|                                                                                     | ☆ DSH082                            | C08-2  | 2 Position, 2 Way | 15/4            | 350/5000            | SV51-SV52   |
|                                                                                     | ☆ DSL102                            | C10-2  | 2 Position, 2 Way | 30/8            | 250/3600            | SV53-SV54   |
|                                                                                     | ☆ DSH102                            | C10-2  | 2 Position, 2 Way | 30/8            | 350/5000            | SV55-SV56   |
|                                                                                     | DS162                               | C16-2  | 2 Position, 2 Way | 75/20           | 210/3000            | SV57-SV58   |
|    | <b>3 WAY SPOOL TYPE</b>             |        |                   |                 |                     |             |
|                                                                                     | ☆ DSL083                            | C08-3  | 2 Position, 3 Way | 15/4            | 250/3600            | SV59-SV61   |
|                                                                                     | ☆ DSH083                            | C08-3  | 2 Position, 3 Way | 15/4            | 350/5000            | SV62-SV64   |
|                                                                                     | ☆ DSL103                            | C10-3  | 2 Position, 3 Way | 30/8            | 250/3600            | SV65-SV67   |
|                                                                                     | ☆ DSH103                            | C10-3  | 2 Position, 3 Way | 30/8            | 350/5000            | SV68-SV70   |
|                                                                                     | DS163                               | C16-3  | 2 Position, 3 Way | 57/15           | 210/3000            | SV71-SV72   |
|    | <b>4 WAY, 2 POSITION SPOOL TYPE</b> |        |                   |                 |                     |             |
|                                                                                     | ☆ DSL084                            | C08-4  | 2 Position, 4 Way | 15/4            | 250/3600            | SV73-SV74   |
|                                                                                     | ☆ DSH084                            | C08-4  | 2 Position, 4 Way | 15/4            | 350/5000            | SV75-SV76   |
|                                                                                     | ☆ DSL104                            | C10-4  | 2 Position, 4 Way | 30/8            | 250/3600            | SV77-SV78   |
|                                                                                     | ☆ DSH104                            | C10-4  | 2 Position, 4 Way | 30/8            | 350/5000            | SV79-SV80   |
|                                                                                     | DSH164                              | C16-4  | 2 Position, 4 Way | 113/30          | 350/5000            | SV81-SV82   |
|    | <b>4 WAY, 3 POSITION SPOOL TYPE</b> |        |                   |                 |                     |             |
|                                                                                     | GS02 51                             | C08-4  | 3 Position, 4 Way | 17/4.5          | 350/5000            | SV83-SV84   |
|                                                                                     | GS02 53                             | C08-4  | 3 Position, 4 Way | 15/4            | 350/5000            | SV85-SV86   |
|                                                                                     | GS02 57                             | C08-4  | 3 Position, 4 Way | 13/3.5          | 350/5000            | SV87-SV88   |
|                                                                                     | GS02 59                             | C08-4  | 3 Position, 4 Way | 13/3.5          | 350/5000            | SV89-SV90   |
|  | ☆ DSL105                            | C10-4  | 3 Position, 4 Way | 19/5            | 250/3600            | SV91-SV92   |
|                                                                                     | GS04 52D                            | C10-4  | 3 Position, 4 Way | 20/8            | 350/5000            | SV93-SV94   |
|                                                                                     | GS04 54D                            | C10-4  | 3 Position, 4 Way | 38/10           | 350/5000            | SV95-SV96   |
|                                                                                     | GS04 57D                            | C10-4  | 3 Position, 4 Way | 42/11           | 350/5000            | SV97-SV98   |
|                                                                                     | GS04 59D                            | C10-4  | 3 Position, 4 Way | 42/11           | 350/5000            | SV99-SV100  |
|  | DSH125 52                           | C12-4L | 3 Position, 4 Way | 57/15           | 350/5000            | SV101-SV102 |
|                                                                                     | DSH125 54                           | C12-4L | 3 Position, 4 Way | 57/15           | 350/5000            | SV103-SV104 |
|                                                                                     | DSH125 57                           | C12-4L | 3 Position, 4 Way | 57/15           | 350/5000            | SV105-SV106 |
|                                                                                     | DSH125 59                           | C12-4L | 3 Position, 4 Way | 57/15           | 350/5000            | SV107-SV108 |

☆ Denotes New Winner's Circle Product Line.



CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data


## INTRODUCTION

This technical tips section is designed to help familiarize you with the Parker line of Solenoid Valves. In this section we highlight new products to this catalog as well as some design features of our solenoid valves. In addition we present common options available to help you in selecting products for your application. Finally, we give a brief synopsis of the operation and applications of the various products offered in this section. Some tips in applying and selecting our products are provided throughout this guide.

## NEW PRODUCTS

There are several new additions and product improvements to our Solenoid Valve product line.

*Here are just some of the design features and advantages to the product line.*

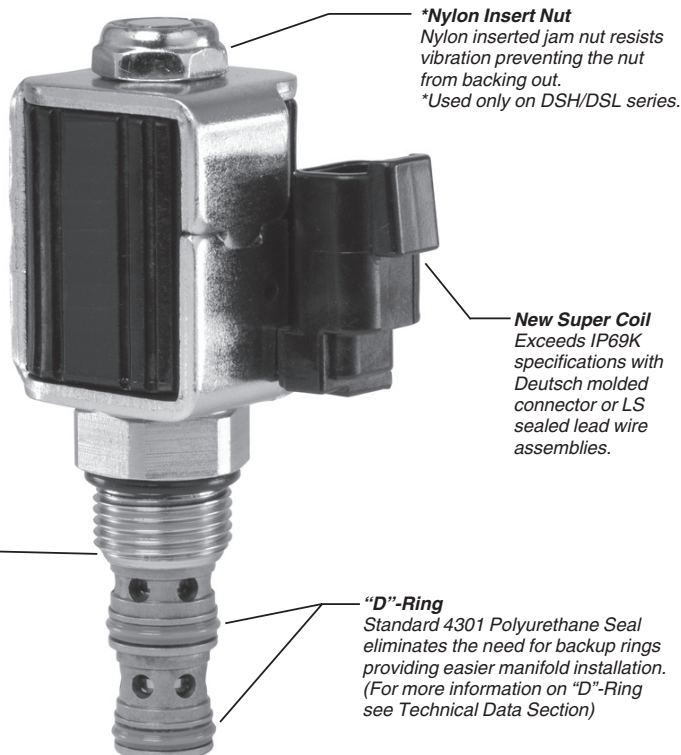

**\*Nylon Insert Nut**

Nylon inserted jam nut resists vibration preventing the nut from backing out.  
\*Used only on DSH/DSL series.

**New Super Coil**  
Exceeds IP69K specifications with Deutsch molded connector or LS sealed lead wire assemblies.

**Crimp Design**  
Fold over crimp provides secure holding and eliminates the need for adhesive.

**"D"-Ring**

Standard 4301 Polyurethane Seal eliminates the need for backup rings providing easier manifold installation. (For more information on "D"-Ring see Technical Data Section)

## New Parker **SUPER COIL** Now Available!

### **\*Exceeds IP69k Specifications**

After exhaustive testing, the new Super Coil has clearly distanced itself from the competition. This coil was subjected to the rigors of this environmental standard and the results were excellent. This coil stands up to most rugged of environmental conditions including weather, dust, and extreme temperature variations.

### **\*Water Dunk Test Qualified**

The Super Coil was taken to task in a repeated water dunk thermal cycle test program with alternate exposure to high and low temperature, only to perform with outstanding results.

### **\*Endurance Tested**

The goal of this test was to cycle the coil to high temperature extremes in order to validate the coils ability to perform in extreme temperature environments.

### **\*Water Spray and Chemical Solvent Compatibility**

The Super Coil was subjected to numerous chemical solvents in a rigorous test which established the fact that these coils can withstand harsh and unusual environments. Also, the coils were subjected to a high pressure water spray test. Once again, the Super Coil passed this test.

*\*Deutsch molded connector or LS option is highly recommended.*

**NOTE: LS coil option will be available January 1, 2011.**

## COMMON OPTIONS

As you will see, Parker offers a variety of solenoid valve products. As such, some of the options mentioned below may not be available on all valves. Consult the model coding and dimensions for each valve for more specifics. Here are some of the common options available.

**Seals:** The Winner's Circle products feature a standard Polyurethane "D"-Ring. The "D"-Ring eliminates the need for backup rings. For more information on the "D"-Ring see the Technical Data section of the catalog. The majority of the products are available in Nitrile or Fluorocarbon Seals. You should always match the seal compatibility to the temperature and fluid being used in your application.


**Coils:** Coils can be ordered as part of the full assembly or separately. Various terminations and voltages are available. For detailed information on the coil options consult the coil section of the catalog. The ordering information for each valve will direct you to the proper coil.

**Manual Overrides:** Many of our solenoid valves are also offered with a manual override. The override allows the user to shift the valve when coil force is not available. They provide a means of shifting the solenoid valve due to a loss of power or a coil failure. Overrides are intended for infrequent usage and are not designed to be used as a primary method of valve actuation.


The most common override option for the 2 Position valves is the push & twist style shown below. With a normally closed valve or a pull style tube, the valve is in normal operation (or de-energized)

when the pin is seated in the slotted groove at the lowest position. To shift the valve manually, the operator pushes down on the knob and twists it counterclockwise. When the pressure is removed from the knob, an internal spring pushes the pin up the slotted groove to the upper position of the override. With a normally open valve, or push style tube, the actuation is reversed. The valve is in the normal position (or de-energized)

when the pin is in the upper position of the override. To shift the valve manually, the operator pushes

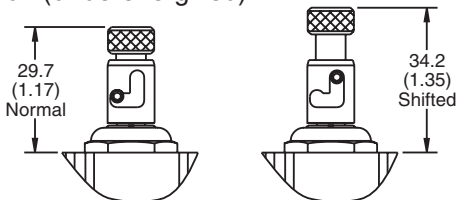


**Normally Closed Pull Type Tube**

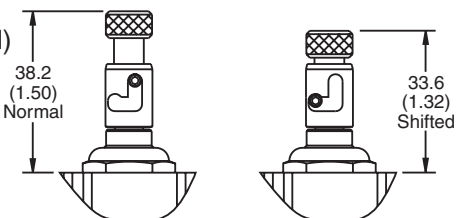


**Normally Open Push Type Tube**

down on the knob and twists is clockwise. Once the pin is seated in the slotted groove, the operator can remove pressure and the valve will stay actuated.

In addition to the push and twist style override, normally closed (pull style tube) 2 position valves can be ordered with a pull and release override. Normally open (push style) 2 position valves are available with flush style and extended style overrides. These overrides are not detented. Each style is shown below.

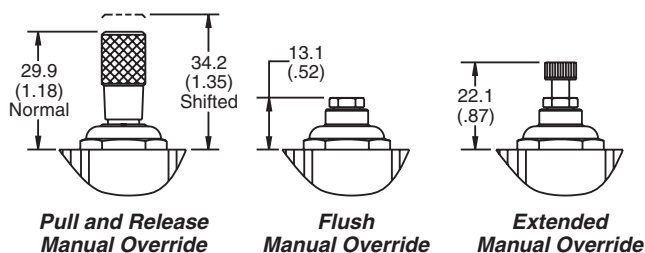

3 Position valves are offered with a Push / Pull style override. This override is not detented. Springs hold the spool of the valve in the center position of the valve. When the knob is pulled, the spool is moved upward simulating the action of the upper coil. When the override is pushed, the spool moves downward simulating the action of the lower coil. When no pressure is applied to the knob, it centers the spool.

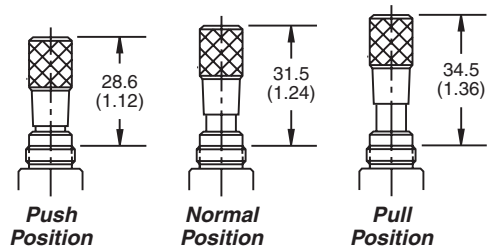

**Screens:** 2 way valves can be ordered with a small mesh screen (60 x 60 mesh) placed over the cage of the cartridge valve. This screen is intended for cursory protection of the internal components of the solenoid valve. It should not be used as the primary method of filtration. The mesh catches small pieces of debris that could impede spool or poppet movement. Note that a screen will trap debris from both directions. Thus, any debris coming from the nose of the cartridge would be trapped inside the valve. As such, we recommend that screens be implemented in only applications where hydraulic fluid passes through the cartridge from the side of the cage to the nose. It should also be noted that the pressure drop through the cartridge will be increased slightly due to the small restriction of the mesh. As the screen fills with debris, pressure drop will continue to rise.



CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data



## PRODUCT TYPES / APPLICATIONS

### Two Way Poppet Valves

Two way poppet valves are pilot operated, low leakage solenoid actuated valves. Two way poppet valves control the flow of a two way function by blocking flow in one direction (similar to a check valve). They are generally selected due to their low leakage and ability to meet higher flow requirements. Poppet valves are often used on single operation actuators or in unloading functions. They are available in normally closed and normally open types. In addition, free reverse flow and fast response versions are available.

#### Normally Closed Poppet



Normally closed two way poppet valves act as a check valve when de-energized, blocking flow from one direction and allowing restricted free flow in the reverse condition. When energized, the poppet lifts allowing free flow from the side to the nose of the cartridge. Should the application require free flow in both directions, the free reverse flow option should be chosen.

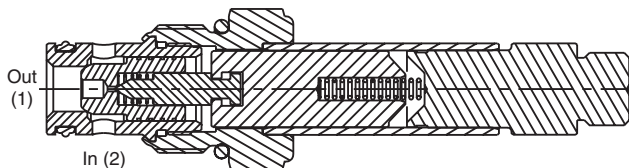

**OPERATION** - The valve pilot is held on its seat by spring force, blocking pilot flow. This allows pressure at the inlet (port 2) to hold the poppet on its seat, thus, preventing flow through the valve (2-1). If the nose of the cartridge (port 1) is pressurized, the pressure will overcome the spring force, pushing the poppet off of its seat, allowing free flow through the cartridge (1-2). When the coil is energized, the valve pilot is pulled off of its seat. This vents the pressure inside the poppet to port 1, creating a pressure imbalance across the main poppet. This differential lifts the poppet allowing flow from the side to nose (2-1). Since poppet valves are piloted operated, a minimum amount of pressure differential (25-50 psi) and flow between ports 2 and 1 must be present to overcome the spring and lift the poppet.

#### Normally Open Poppet



Normally open two way poppet valves, when de-energized, allow free flow from the side (port 2) of the cartridge to the nose (port 1). Flow in the reverse direction is restricted. Should free flow be required in both directions, the free reverse flow option should be specified. Once the coil is energized the normally open poppet valve acts as a check valve, blocking flow from one direction and allowing restricted free flow in the reverse condition.

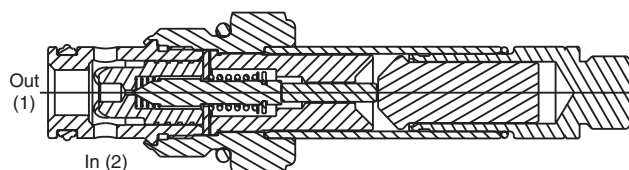

**OPERATION** - The valve pilot is held off its seat by spring force. Pilot flow is vented to port 1, creating a pressure imbalance that moves the main poppet. This differential lifts the poppet allowing flow from the side to nose (2-1). Since poppet valves are piloted operated, a minimum amount of pressure differential (25-50 psi) between ports 2 and 1 must be present to overcome the spring and lift the poppet. When the coil is energized, the coil force overcomes the spring force to drive the valve pilot and main poppet into their seats, thus blocking flow from port 2-1. If the nose of the cartridge (port 1) is pressurized, the pressure will overcome the spring force and solenoid force, pushing the poppet off of its seat, allowing restricted flow through the cartridge (1-2).

**Free Reverse Flow**

The free reverse flow versions are available on both the normally closed and normally open poppet valves. As mentioned above, the operation is the same as the standard poppet valve except flow through the reverse direction is not restricted. The free reverse flow option is only needed if the application requires flow to pass through the cartridge valve from the nose to side (port 1 to port 2).

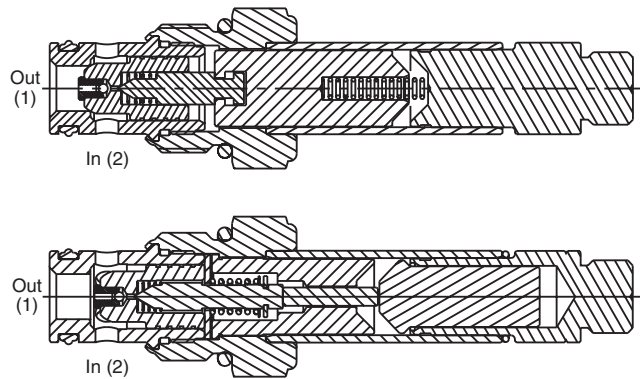**Fast Response**



Since poppet valves are pilot operated valves, a few milliseconds are needed to move the pilot and allow the poppet to lift. Should a faster response time be required on normally closed poppet valves, this option can be chosen. The fast response is accomplished by reducing the movement of the pilot. Thus, the flow capacity of the poppet valve is also decreased.

**Two Way Spool Valves**


Two way spool valves are direct acting, fast responding solenoid actuated valves. Like the poppet valves described earlier, they block the flow of a two way function. Unlike two way poppet valves, spool valves block flow from both the side port and the nose port. They do not have the check like function of the poppet valve, thus they are either open or closed. Spool valves are directed operated, so they respond more quickly to coil voltage than poppet valves. Spool valves operate via a sliding spool, thus, some leakage will be present due to the required spool clearance. Spool valves block flow in both directions, but the preferred flow path is still from the side of the cartridge to the nose due to the flow forces acting on the spool. Two way spool valves are available in normally open and normally closed types.

**Normally Closed Spool**

When de-energized, the spool is positioned by the spring force to cover both the side (2) and nose (1) ports of the valve. Thus, no flow is allowed from either direction. Once the coil is energized, the spool shifts exposing a flow path between the two ports. Flow can then be passed through the valve from either direction.

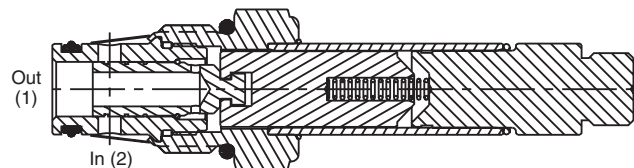**Normally Open Spool**

When de-energized, the spool is positioned by the spring force so that a flow path between the side (2) and nose (1) ports is exposed, allowing flow through the valve from either direction. Once the coil is energized, the spool shifts to cover both the side (2) and nose (1) ports of the valve. Thus, no flow is allowed from either direction.

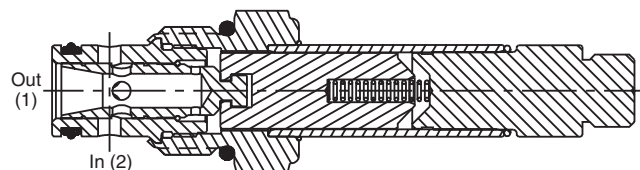**CV**Check  
Valves**SH**Shuttle  
Valves**LM**Load/Motor  
Controls**FC**Flow  
Controls**PC**Pressure  
Controls**LE**Logic  
Elements**DC**Directional  
Controls**MV**Manual  
Valves**SV**Solenoid  
Valves**PV**Proportional  
Valves**CE**Coils &  
Electronics**BC**Bodies &  
Cavities**TD**Technical  
Data

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics



BC

Bodies &  
Cavities



TD

Technical  
Data**Bi-Directional Poppet Valve**

Bi-directional poppet valves combine the dual blocking function of spool valves with the lower leakage capabilities of poppet valves. These valves also have a limited flow capacity compared to standard poppet or spool valves.

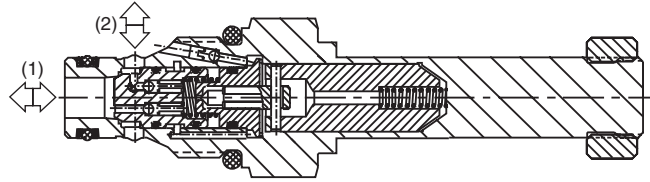
**Two Position, Three Way Spool Valve**

Three way spool solenoid valves provide directional control of flow. Each three way valve has a special internal spool which connects two of the three valve ports. When actuated, the spool connects a different combination of valve ports. These valves are often used for raise and lower functions of a single acting cylinder, control of a uni-directional motor, or as a circuit selector.

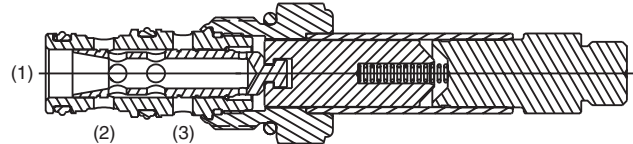


**OPERATION** - In the de-energized mode, the spool is positioned by spring force. When energized, the coil force directly shifts the spool against the spring, thus changing the flow through the valve. Each spool type can be used as a normally open, normally closed, or selector valve. To explain this we will review the DSL103A which is pictured here. When the valve is de-energized, ports 1 and 2 are open to one another. When energized, ports 1 and 3 are connected.


Thus, if we use port 3 as our pressure port, we have a **normally closed valve**. The pressure port (3) is blocked, while the actuator port (1) is drained to tank (2).



If we use port 2 as our pressure port, we have a **normally open valve**. The pressure port (2) is connected to the actuator port (1), and the tank port (3) is blocked.





If we use port 1 as our pressure port, we have a **selector valve**. The pressure port (1) is either connected to port (2) or port (3). Thus, it is "selecting" which port will get the system pressure and flow.



Note that in all three examples, we were using the same valve. The flow forces acting on the spool change depending on which port is pressurized. Thus, if you will be shifting the three way valve under full flow and pressure, it is important to review the shift limit characteristics for the flow paths you have chosen to be sure the coil has enough force to shift the spool. Various spools are available in this catalog to maximize the flow and pressure capacities for the desired flow function.

### Two Position, Four Way Spool Valve


Four way spool solenoid valves provide directional control of flow. Each four way valve has a special internal spool which connects some combination of the four valve ports together. When actuated, the spool connects a different combination of valve ports. These valves are often used for the raise / lower function of a double acting cylinder, or as a forward / reverse function of bi-directional motors.

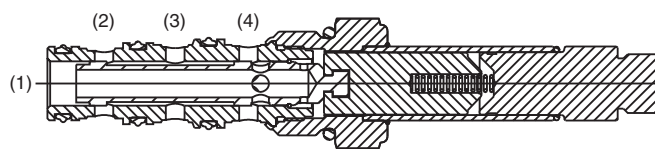

**OPERATION** - In the de-energized mode, the spool is positioned by spring force. When energized, the coil force directly shifts the spool against the spring, thus changing the flow through the valve. Each spool type is customized to provide the flow combination desired. The flow forces acting on the spool change depending on which port is pressurized. Thus, if you will be shifting the four way valve under full flow and pressure, it is important to review the shift limit characteristics for the flow paths you have chosen to ensure the coil has enough force to shift the spool. Various spools are shown in this catalog to maximize the flow and pressure capacities for the desired flow function.

### Three Position, Four Way Spool Valve

Three position, four way spool solenoid valves provide directional control of flow. Each four way valve has a special internal spool which connects some combination of the four ports together. When one coil is actuated, the spool connects a different combination of valve ports. When the other coil is actuated a third combination of valve ports are connected. These valves are often used for the raise / lower function of a double acting cylinder, or as a forward / reverse function of bi-directional motors. The center position can be used to stop the actuator in mid-stroke, or dump the pump flow.

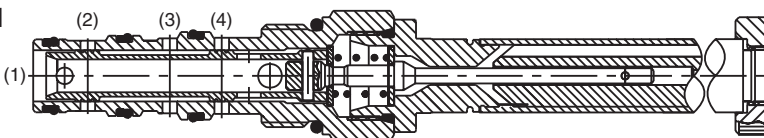

**OPERATION** - In the de-energized mode, the spool is positioned by spring force. When energized, the coil force directly shifts the against the spring, thus changing the flow through the valve. Each spool type is customized to provide the flow combination desired. The flow forces acting on the spool change depending on which port is pressurized. Thus, if you will be shifting the four way valve under full flow and pressure, it is important to review the shift limit characteristics for the flow paths you chosen to ensure the coil has enough force to shift the spool. Various spools are shown in this catalog to maximize the flow and pressure capacities for the desired flow function.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Closed Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- High flow capacity
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.

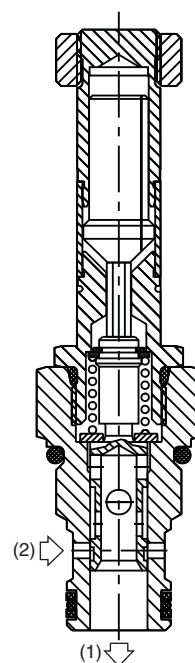


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 13 LPM (3.5 GPM)                                                                                             |
| <b>Maximum Inlet<br/>Pressure</b>             | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 82 cc/min @ 210 Bar (3000 PSI)                                                                               |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .14 kg (.31 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C09-2<br>(See BC Section for more details)                                                                   |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

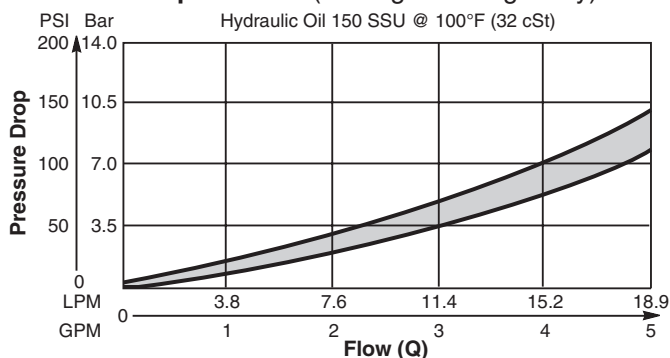

### Operating Limits (Measured at 75% of Nominal Current)

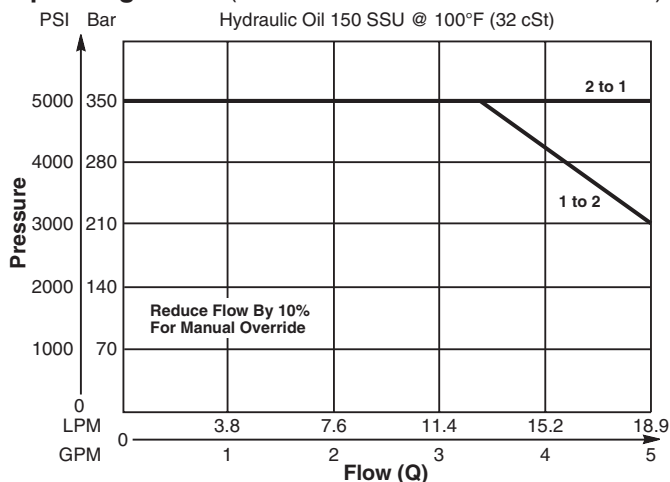

## Dimensions    Millimeters (Inches)

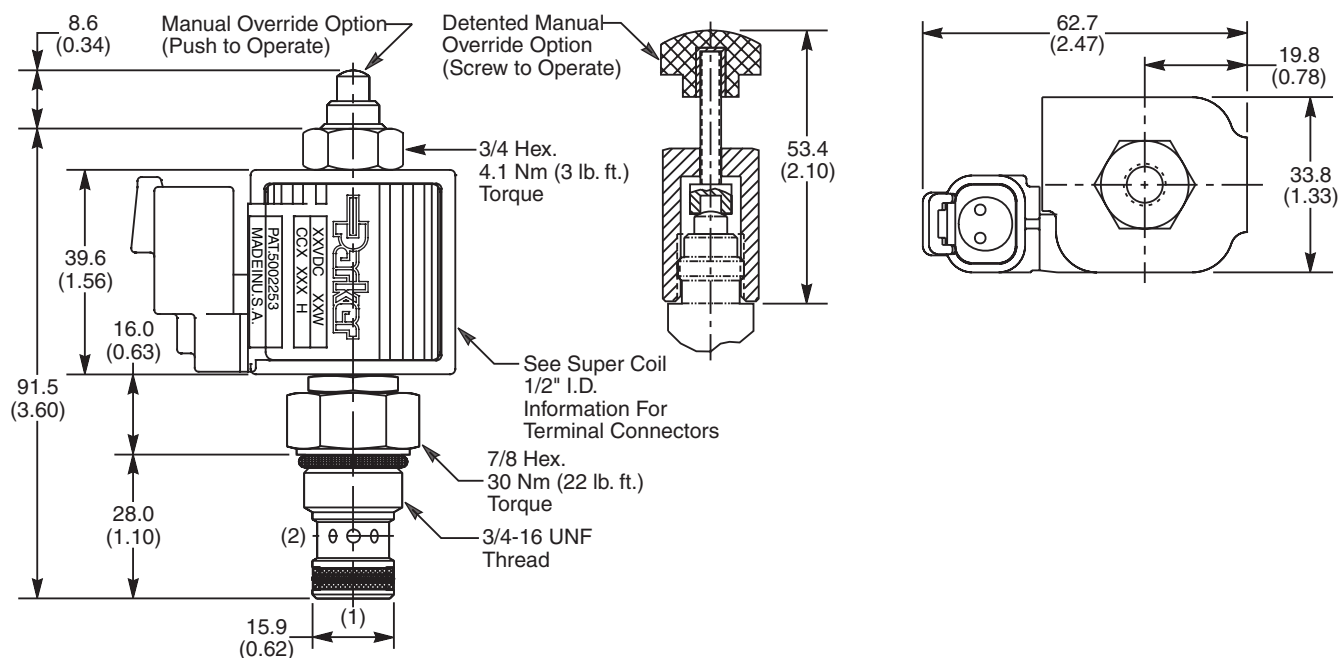

## Ordering Information

|                        |                       |                 |        |       |           |              |                  |               |           |
|------------------------|-----------------------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>22</b>             |                 |        |       |           |              |                  |               |           |
| 09 Size Solenoid Valve | Style Normally Closed | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                     |
|------|---------------------------|
| 22   | High Pressure ('SP' Coil) |

| Code | Override Options         |
|------|--------------------------|
| 0    | None                     |
| 1    | Manual Override          |
| 2    | Detented Part No. 900690 |

| Code | Screen |
|------|--------|
| 0    | None   |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30076N-1) |
| V    | Fluorocarbon / (SK30076V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B09-2-*6T)   |
| 6B   | 3/8" BSPG      | (B09-2-6B)†   |

\* Add "A" for aluminum, omit for steel.  
† Steel body only.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Open Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- High flow capacity
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.

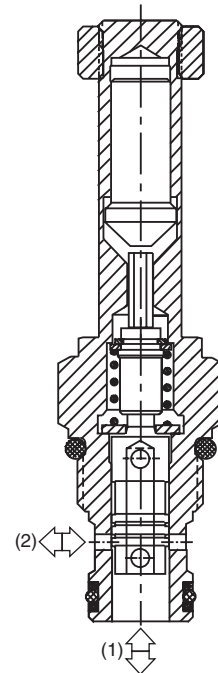


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 15 LPM (4 GPM)                                                                                               |
| <b>Maximum Inlet<br/>Pressure</b>             | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 82 cc/min @ 210 Bar (3000 PSI)                                                                               |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .14 kg (.31 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C09-2<br>(See BC Section for more details)                                                                   |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

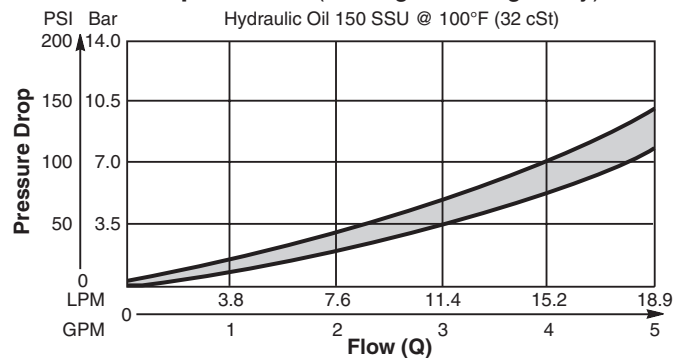

### Operating Limits (Measured at 75% of Nominal Current)

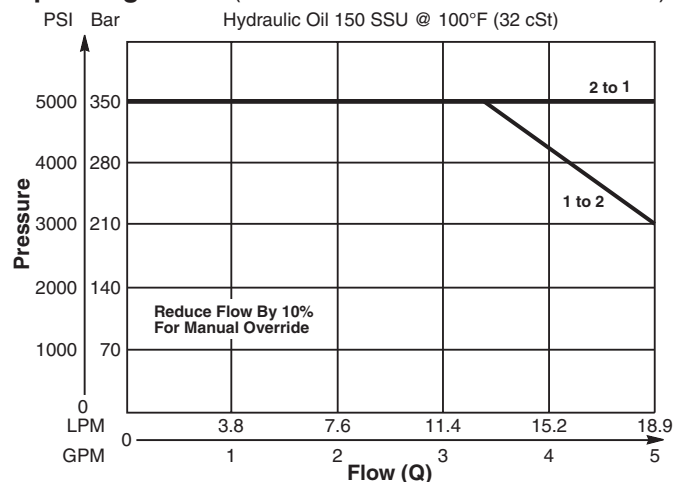

**Dimensions** Millimeters (Inches)

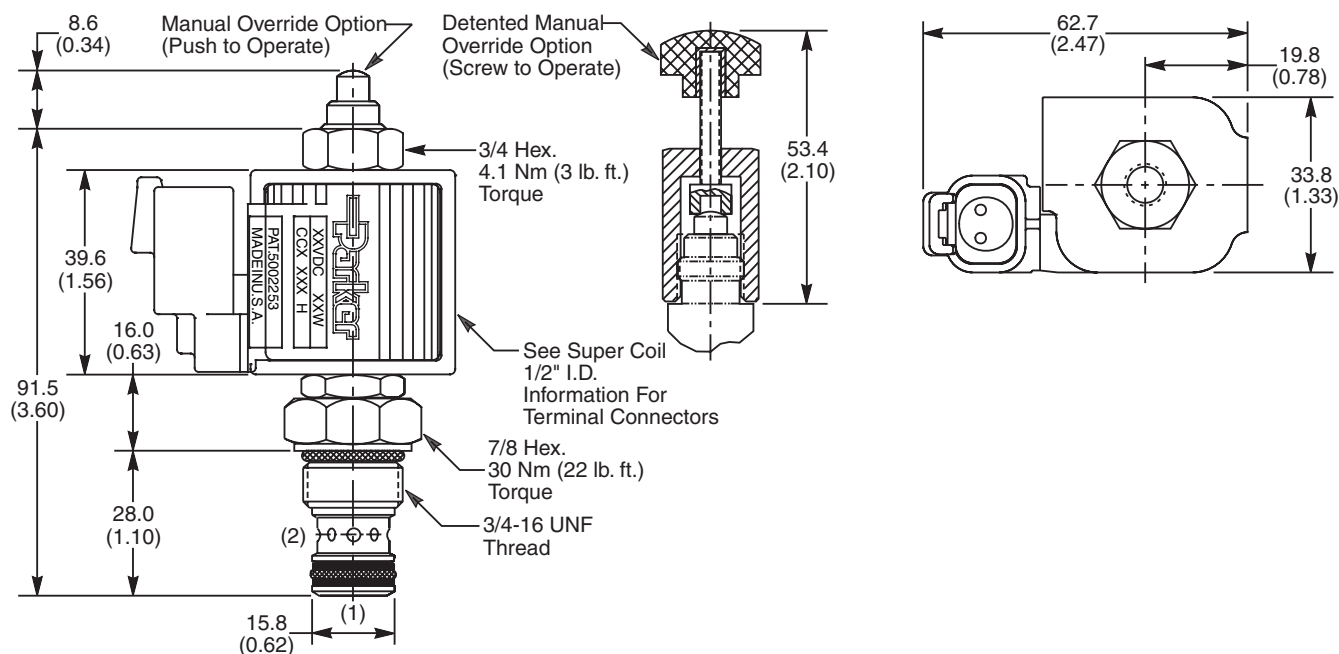

**Ordering Information**

|                        |                     |                 |        |       |           |              |                  |               |           |
|------------------------|---------------------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>27</b>           |                 |        |       |           |              |                  |               |           |
| 09 Size Solenoid Valve | Style Normally Open | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                     |
|------|---------------------------|
| 27   | High Pressure ('SP' Coil) |

| Code | Override Options         |
|------|--------------------------|
| 0    | None                     |
| 1    | Manual Override          |
| 2    | Detented Part No. 900690 |

| Code | Screen |
|------|--------|
| 0    | None   |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30076N-1) |
| V    | Fluorocarbon / (SK30076V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B09-2-*6T)   |
| 6B   | 3/8" BSPG      | (B09-2-6B)†   |

\* Add "A" for aluminum, omit for steel.  
 † Steel body only.

## Technical Information

CV

Check  
Valves

SH




Shuttle  
ValvesLM  
Load/Motor  
ControlsFC  
Flow  
ControlsPC  
Pressure  
ControlsLE  
Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description

4-Way, 2 Position, Reversing Spool Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Designed to operate double and single acting cylinders, pilot circuits and bi-directional motors, etc.
- High flow capacity with reduced space requirements
- High pressure capacity to 350 Bar (5000 PSI)
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- Manual override available

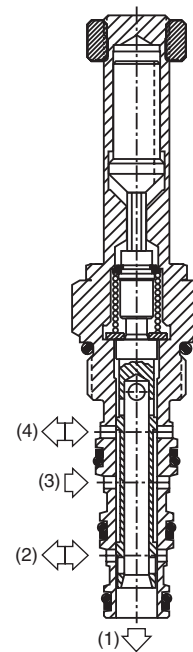


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 19 LPM (5 GPM)                                                                                               |
| <b>Maximum Inlet Pressure</b>                 | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        |                                                                                                              |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .30 kg (.66 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C08-4<br>(See BC Section for more details)                                                                   |

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

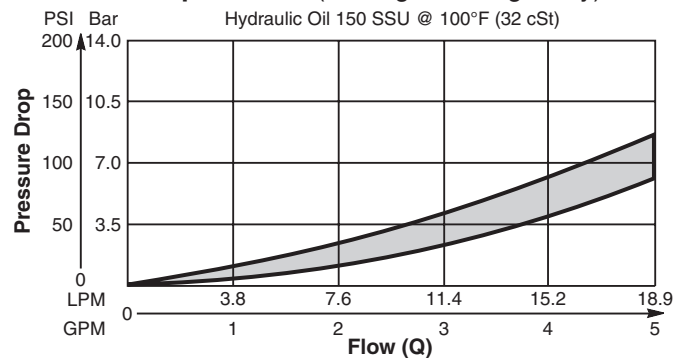

## Operating Limits (Measured at 75% of Nominal Current)

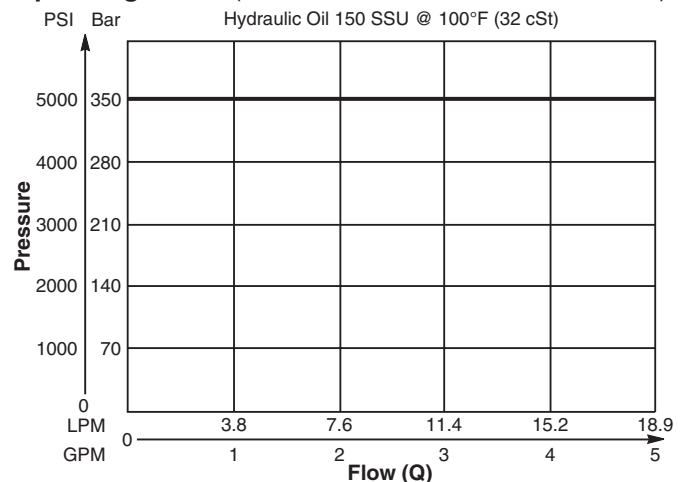

**Dimensions** Millimeters (Inches)

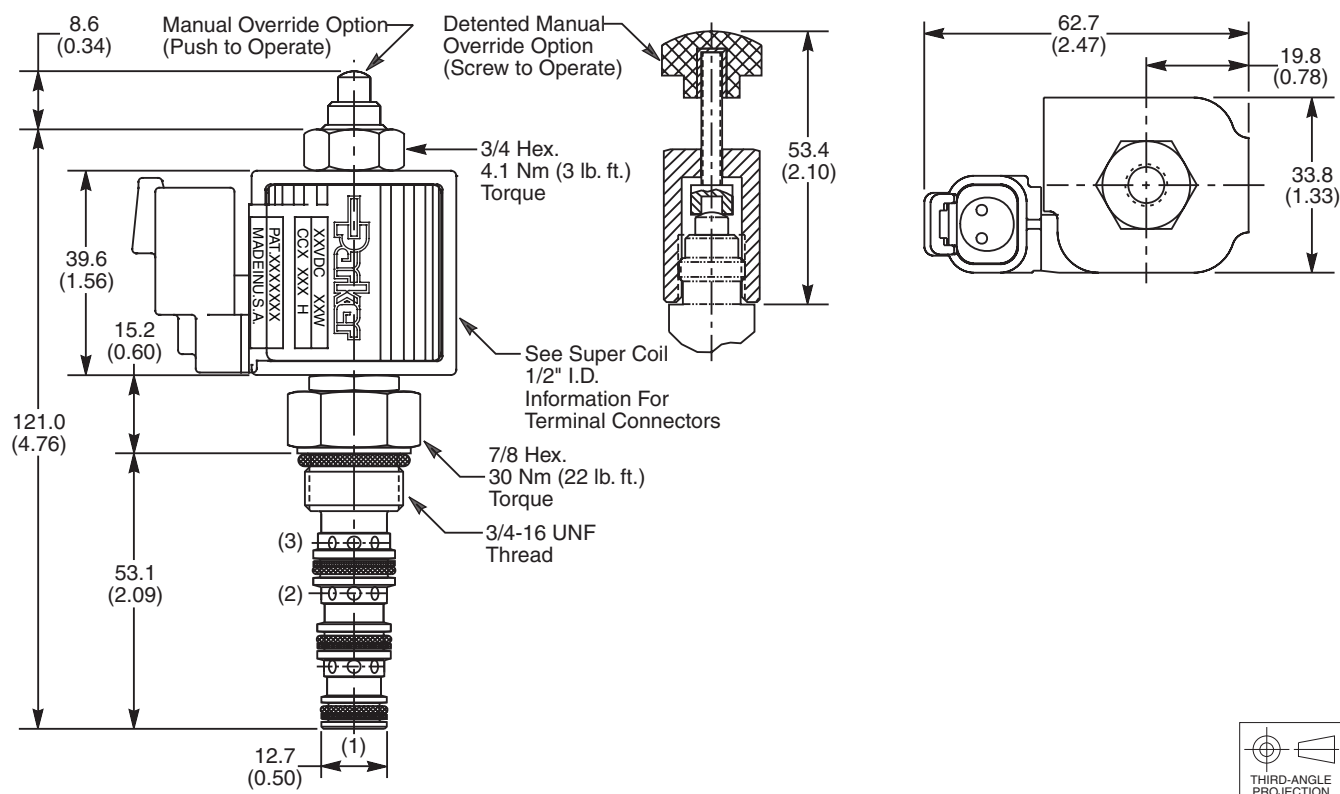

**Ordering Information**

|                        |           |                 |        |       |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>42</b> |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code      | Style                     |
|-----------|---------------------------|
| <b>42</b> | High Pressure ('SP' Coil) |

| Code     | Override Options         |
|----------|--------------------------|
| <b>0</b> | None                     |
| <b>1</b> | Manual Override          |
| <b>2</b> | Detented Part No. 900690 |

| Code     | Screen        |
|----------|---------------|
| <b>0</b> | Not Available |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30078N-1) |
| <b>V</b> | Fluorocarbon / (SK30078V-1)          |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP</b>   | Super Coil - 19 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>6T</b>   | SAE-6          | (B08-4-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

Poppet Type, 2-Way Valve  
Series DSL081

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- Replaceable, one piece encapsulated, coils with minimal amperage draw
- Variety of coil terminations and voltages
- Variety of manual override options available
- Fast response available, (CH and CHR) rated at 15 LPM (4.0 GPM)
- Polyurethane "D"-Ring eliminates need for backup rings
- Spherical poppet for low leakage
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated



## Specifications

|                                               |                                                                                                             |                  |                     |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 30 LPM (8 GPM)                                                                                              |                  |                     |
| <b>Maximum Inlet Pressure</b>                 | 250 Bar (3600 PSI)                                                                                          |                  |                     |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 5 drops/min. (.33 cc/min.)                                                                                  |                  |                     |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at 20°C (72°F).                                                                        |                  |                     |
| <b>Response Time</b>                          |                                                                                                             | <b>Energized</b> | <b>De-Energized</b> |
|                                               | <b>C, CR</b>                                                                                                | 50 ms            | 50 ms               |
|                                               | <b>CH, CHR</b>                                                                                              | 30 ms            | 50 ms               |
|                                               | <b>N, NR</b>                                                                                                | 50 ms            | 40 ms               |
| <b>Cartridge Material</b>                     | All parts steel. All operating parts hardened steel.                                                        |                  |                     |
| <b>Operating Temp.<br/>Range/Seals</b>        | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |                     |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |                  |                     |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |                  |                     |
| <b>Approx. Weight</b>                         | .11 kg (.25 lbs.)                                                                                           |                  |                     |
| <b>Cavity</b>                                 | C08-2<br>(See BC Section for more details)                                                                  |                  |                     |
| <b>Form Tool</b>                              | Rougher<br>Finisher                                                                                         | None<br>NFT08-2F |                     |






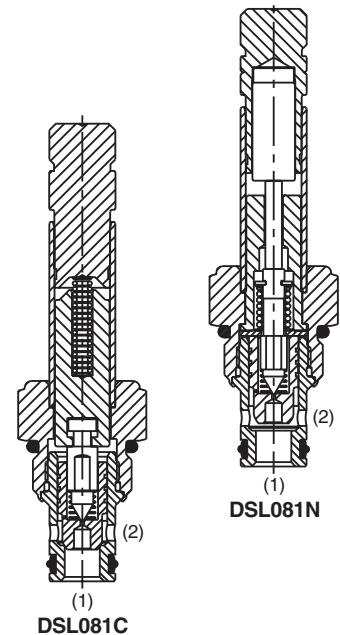



## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)

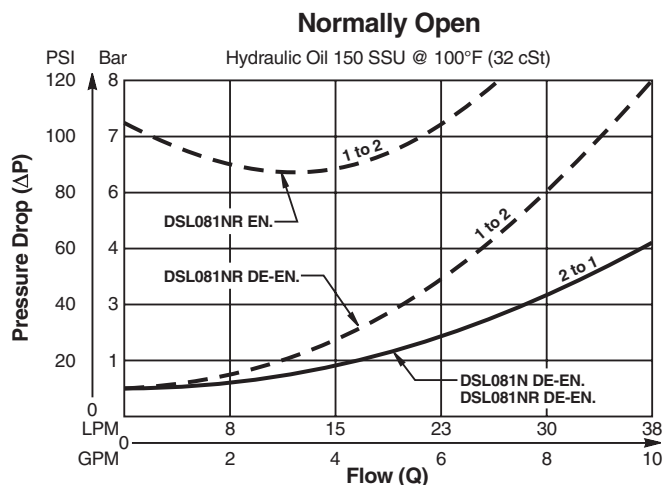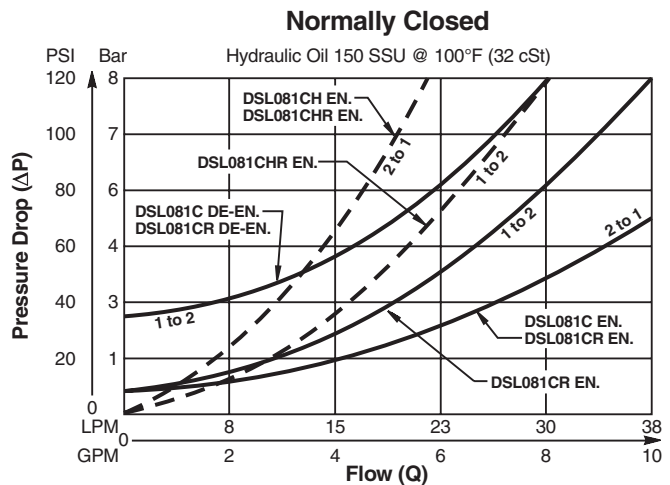

**Dimensions** Millimeters (Inches)

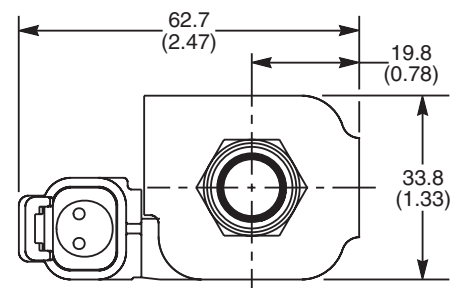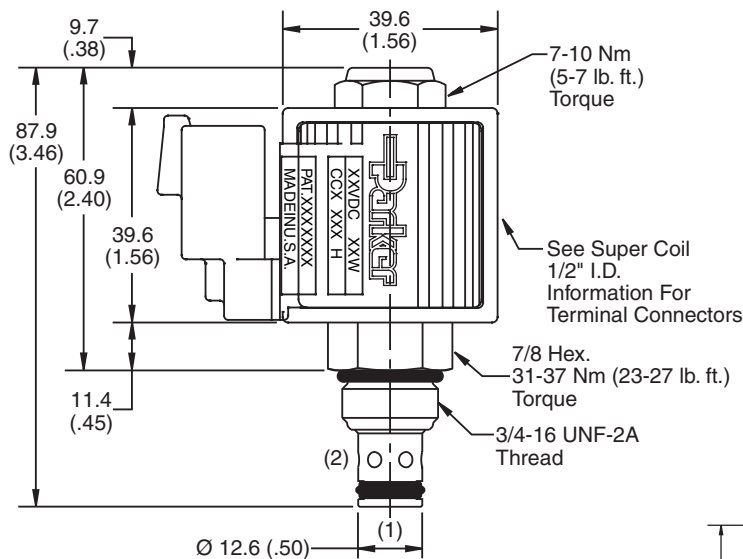

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSL081</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CHR</b><br>Normally Closed<br>Full reverse flow<br>(Fast response)   |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                              |
|-------------|-----------------------------------------------|
| <b>Omit</b> | None                                          |
| <b>E</b>    | Push Type with<br>Extended Rod<br>(N.O. Only) |
| <b>M</b>    | Push Type with<br>Flush Rod (N.O. Only)       |
| <b>P</b>    | Pull & Release<br>(N.C. Only)                 |
| <b>T</b>    | Push & Twist<br>(N.C. & N.O.)                 |

| Code        | Seals / Kit No.             |
|-------------|-----------------------------|
| <b>Omit</b> | "D"-Ring / (SK08-2)         |
| <b>N</b>    | Nitrile / (SK08-2N)         |
| <b>V</b>    | Fluorocarbon /<br>(SK08-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 19 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP* Coil    | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timert†    |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended*

*†DC Only*

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size | Body Part No.  |
|-------------|-----------|----------------|
| <b>Omit</b> |           | Cartridge Only |
| <b>4P</b>   | 1/4" NPTF | (B08-2-*4P)    |
| <b>6P</b>   | 3/8" NPTF | (B08-2-*6P)    |
| <b>4T</b>   | SAE-4     | (B08-2-*4T)    |
| <b>6T</b>   | SAE-6     | (B08-2-*6T)    |
| <b>6B</b>   | 3/8" BSPG | (B08-2-*6B)    |

*\* Add "A" for aluminum, omit for steel.*

## Technical Information

Poppet Type, 2-Way Valve  
Series DSH081

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
ControlsPC  
Pressure  
Controls

LE

Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- Replaceable, one piece encapsulated, coils with minimal amperage draw
- Variety of coil terminations and voltages
- Variety of manual override options available
- Fast response available, (CH and CHR) rated at 15 LPM (4.0 GPM)
- Polyurethane "D"-Ring eliminates need for backup rings
- Spherical poppet for low leakage
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated



## Specifications

|                                               |                                                                                                             |                  |                     |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 30 LPM (8 GPM)                                                                                              |                  |                     |
| <b>Maximum Inlet Pressure</b>                 | 350 Bar (5000 PSI)                                                                                          |                  |                     |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 5 drops/min. (.33 cc/min.)                                                                                  |                  |                     |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at 20°C (72°F).                                                                        |                  |                     |
| <b>Response Time</b>                          |                                                                                                             | <b>Energized</b> | <b>De-Energized</b> |
|                                               | <b>C, CR</b>                                                                                                | 50 ms            | 50 ms               |
|                                               | <b>CH, CHR</b>                                                                                              | 30 ms            | 50 ms               |
|                                               | <b>N, NR</b>                                                                                                | 50 ms            | 40 ms               |
| <b>Cartridge Material</b>                     | All parts steel. All operating parts hardened steel.                                                        |                  |                     |
| <b>Operating Temp.<br/>Range/Seals</b>        | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |                     |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |                  |                     |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |                  |                     |
| <b>Approx. Weight</b>                         | .11 kg (.25 lbs.)                                                                                           |                  |                     |
| <b>Cavity</b>                                 | C08-2<br>(See BC Section for more details)                                                                  |                  |                     |
| <b>Form Tool</b>                              | Rougher<br>Finisher                                                                                         | None<br>NFT08-2F |                     |






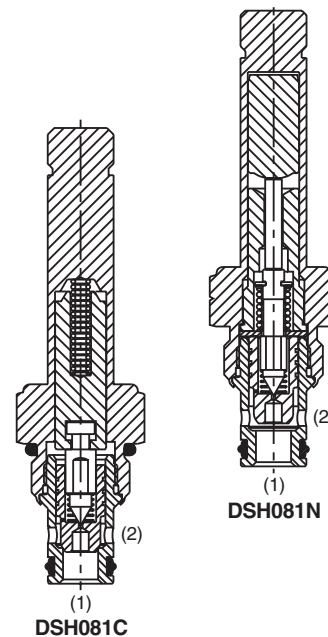



## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)

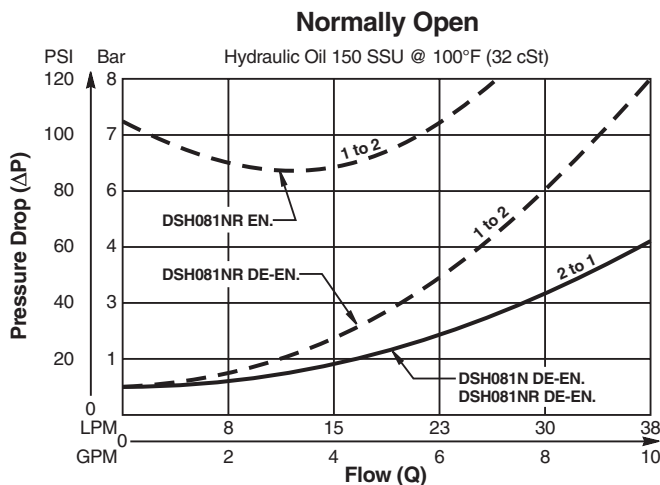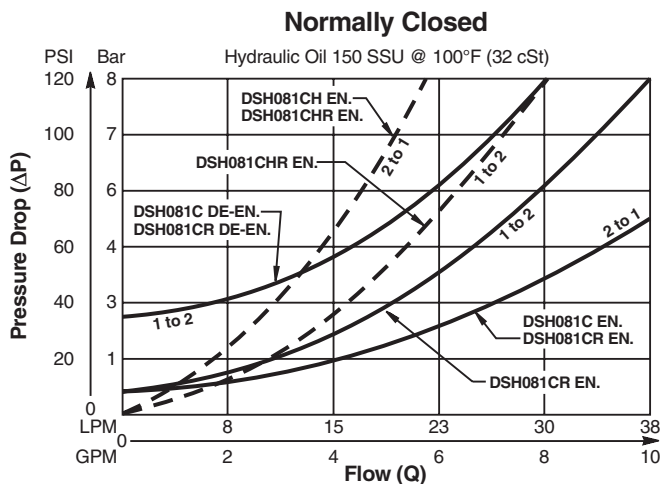

**Dimensions** Millimeters (Inches)

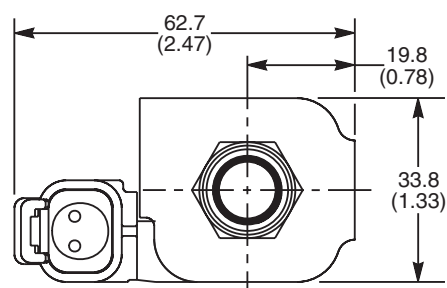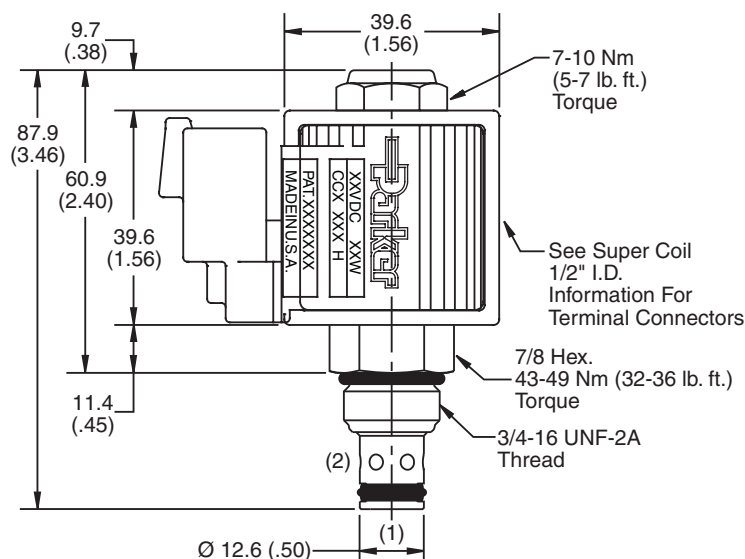

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSH081</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CHR</b><br>Normally Closed<br>Free reverse flow<br>(Fast response)   |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                              |
|-------------|-----------------------------------------------|
| <b>Omit</b> | None                                          |
| <b>E</b>    | Push Type with<br>Extended Rod<br>(N.O. Only) |
| <b>M</b>    | Push Type with<br>Flush Rod (N.O. Only)       |
| <b>T</b>    | Push & Twist<br>(N.C.* & N.O.)                |

\*Requires Super Coil

| Code        | Seals / Kit No.             |
|-------------|-----------------------------|
| <b>Omit</b> | "D"-Ring / (SK08-2)         |
| <b>N</b>    | Nitrile / (SK08-2N)         |
| <b>V</b>    | Fluorocarbon /<br>(SK08-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 19 Watts |

\*Recommended

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*<br>Coil | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timert†    |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

\*Recommended †DC Only

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size | Body Part No.  |
|-------------|-----------|----------------|
| <b>Omit</b> |           | Cartridge Only |
| <b>4P</b>   | 1/4" NPTF | (B08-2-*4P)    |
| <b>6P</b>   | 3/8" NPTF | (B08-2-*6P)    |
| <b>4T</b>   | SAE-4     | (B08-2-*4T)    |
| <b>6T</b>   | SAE-6     | (B08-2-*6T)    |
| <b>6B</b>   | 3/8" BSPG | (B08-2-*6B)    |

\* Add "A" for aluminum, omit for steel.

## Technical Information

Poppet Type, 2-Way Valve  
Series DSL101

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- Low hysteresis
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- Fast response available, (CH and CHR) rated at 11 LPM (3.0 GPM)
- Polyurethane "D"-Ring
- All external parts zinc plated

## Specifications


|                                       |                                                                                                             |           |              |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------|--------------|
| Rated Flow<br>(At 70 PSI $\Delta P$ ) | 60 LPM (15 GPM)                                                                                             |           |              |
| Maximum Inlet Pressure                | 250 Bar (3600 PSI)                                                                                          |           |              |
| Leakage at<br>150 SSU (32 cSt)        | 5 drops/min. (.33 cc/min.)                                                                                  |           |              |
| Minimum<br>Operating Voltage          | 85% of rated voltage at 20°C (72°F).                                                                        |           |              |
| Response Time                         |                                                                                                             | Energized | De-Energized |
|                                       | C, CR                                                                                                       | 80 ms     | 150 ms       |
|                                       | CH, CHR                                                                                                     | 50 ms     | 50 ms        |
|                                       | N, NR                                                                                                       | 35 ms     | 175 ms       |
| Cartridge Material                    | All parts steel. All operating parts hardened steel.                                                        |           |              |
| Operating Temp.<br>Range/Seals        | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |           |              |
| Fluid<br>Compatibility/<br>Viscosity  | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |           |              |
| Filtration                            | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |           |              |
| Approx. Weight                        | .20 kg (0.41 lbs.)                                                                                          |           |              |
| Cavity                                | C10-2<br>(See BC Section for more details)                                                                  |           |              |
| Form Tool                             | Rougher                                                                                                     | None      |              |
|                                       | Finisher                                                                                                    | NFT10-2F  |              |

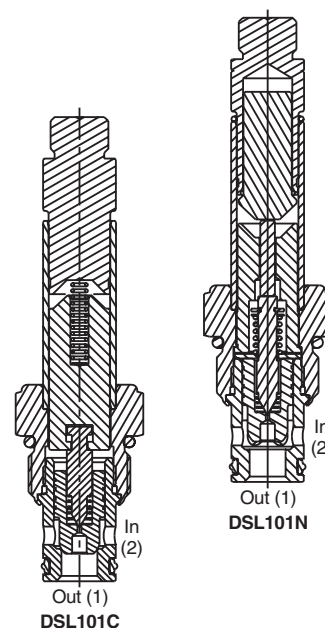


## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)









## Normally Closed

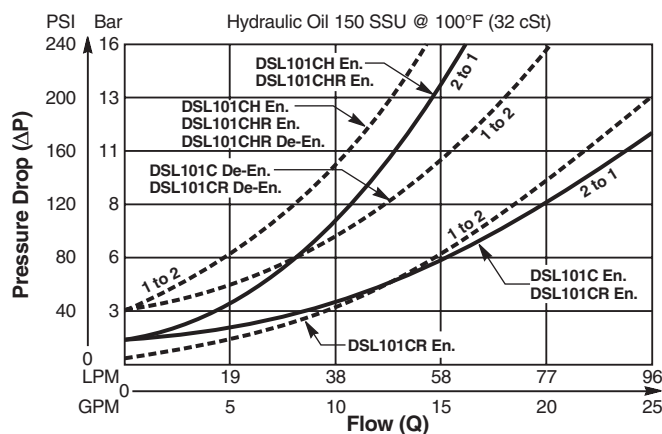

## Normally Open

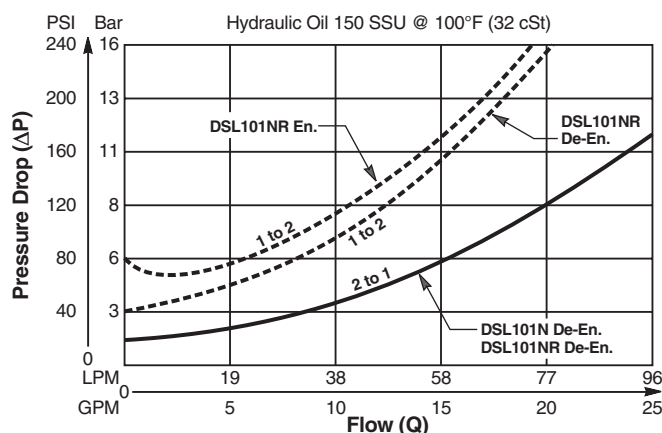

**Dimensions** Millimeters (Inches)

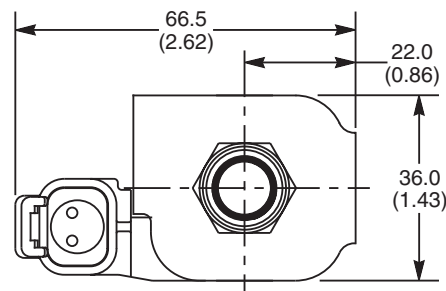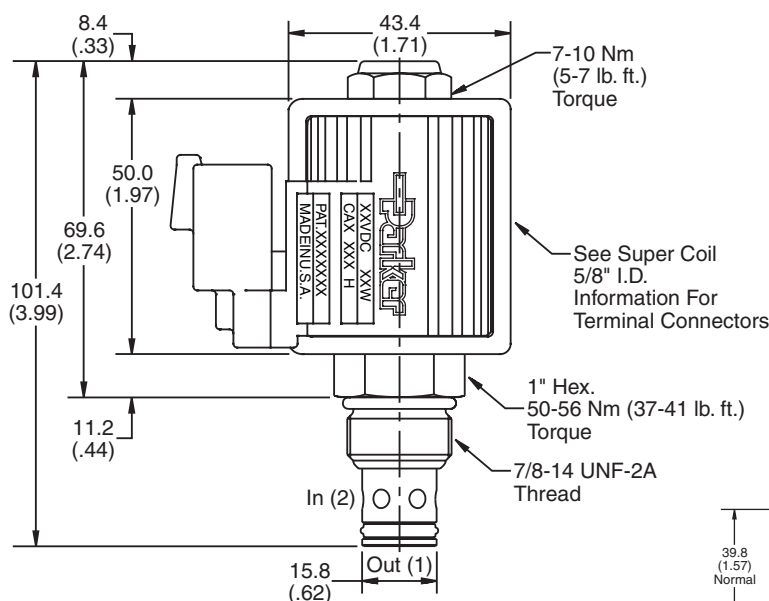

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSL101</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>10 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CHR</b><br>Normally Closed<br>Free reverse flow<br>(Fast response)   |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                           |
|-------------|--------------------------------------------|
| <b>Omit</b> | None                                       |
| <b>E</b>    | Push Type with<br>Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with<br>Flush Rod (N.O. Only)    |
| <b>P</b>    | Pull & Release<br>(N.C. Only)              |
| <b>T</b>    | Push & Twist<br>(N.C. & N.O.)              |

| Code        | Seals / Kit. No.            |
|-------------|-----------------------------|
| <b>Omit</b> | "D"-Ring / (SK10-2)         |
| <b>N</b>    | Nitrile / (SK10-2N)         |
| <b>V</b>    | Fluorocarbon /<br>(SK10-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*<br>Coil | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timert†    |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended †DC Only*

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>4P</b>   | 1/4" NPTF      | (B10-2-*4P)   |
| <b>6P</b>   | 3/8" NPTF      | (B10-2-*6P)   |
| <b>8P</b>   | 1/2" NPTF      | (B10-2-*8P)   |
| <b>6T</b>   | SAE-6          | (B10-2-*6T)   |
| <b>8T</b>   | SAE-8          | (B10-2-*8T)   |
| <b>T8T</b>  | SAE-8          | (B10-2-T8T)†  |
| <b>6B</b>   | 3/8" BSPG      | (B10-2-6B)†   |

*\* Add "A" for aluminum. omit for steel.  
† Steel body only.*

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
ControlsPC  
Pressure  
Controls

LE

Logic  
ElementsDC  
Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- Low hysteresis
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- Fast response available, (CH and CHR) rated at 30 LPM (8 GPM)
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated

## Specifications


|                                               |                                                                                                             |                  |                     |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 60 LPM (15 GPM)                                                                                             |                  |                     |
| <b>Maximum Inlet Pressure</b>                 | 350 Bar (5000 PSI)                                                                                          |                  |                     |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 5 drops/min. (.33 cc/min.)                                                                                  |                  |                     |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at 20°C (72°F).                                                                        |                  |                     |
| <b>Response Time</b>                          |                                                                                                             | <b>Energized</b> | <b>De-Energized</b> |
|                                               | <b>C, CR</b>                                                                                                | 80 ms            | 150 ms              |
|                                               | <b>CH, CHR</b>                                                                                              | 50 ms            | 50 ms               |
|                                               | <b>N, NR</b>                                                                                                | 70 ms            | 35 ms               |
| <b>Cartridge Material</b>                     | All parts steel. All operating parts hardened steel.                                                        |                  |                     |
| <b>Operating Temp.<br/>Range/Seals</b>        | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |                     |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |                  |                     |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |                  |                     |
| <b>Approx. Weight</b>                         | .20 kg (0.41 lbs.)                                                                                          |                  |                     |
| <b>Cavity</b>                                 | C10-2<br>(See BC Section for more details)                                                                  |                  |                     |
| <b>Form Tool</b>                              | Rougher                                                                                                     | None             |                     |
|                                               | Finisher                                                                                                    | NFT10-2F         |                     |

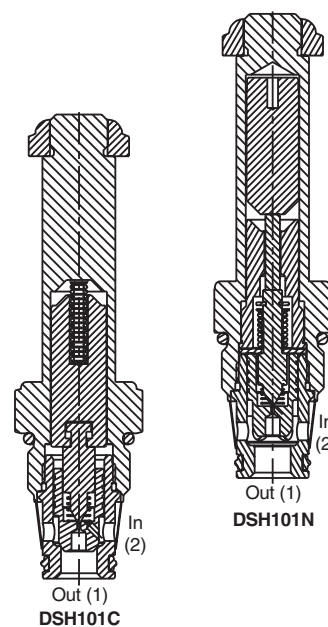


## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)





## Normally Closed

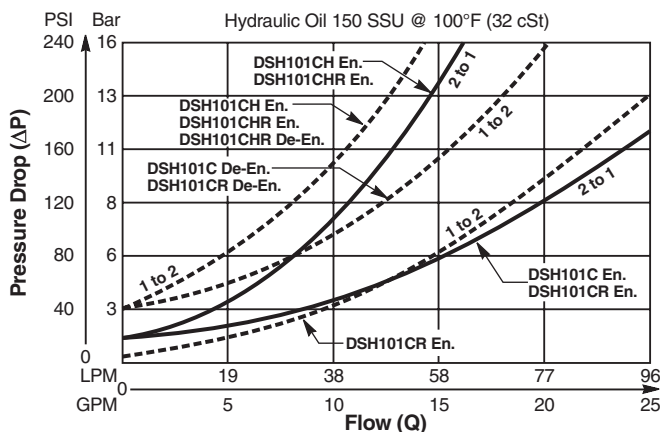

## Normally Open

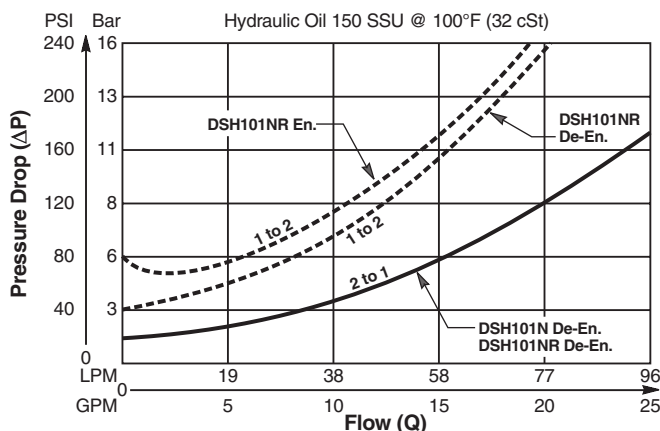

**Dimensions** Millimeters (Inches)

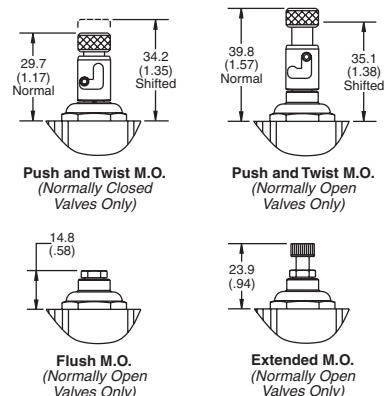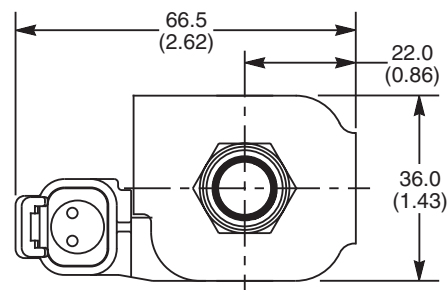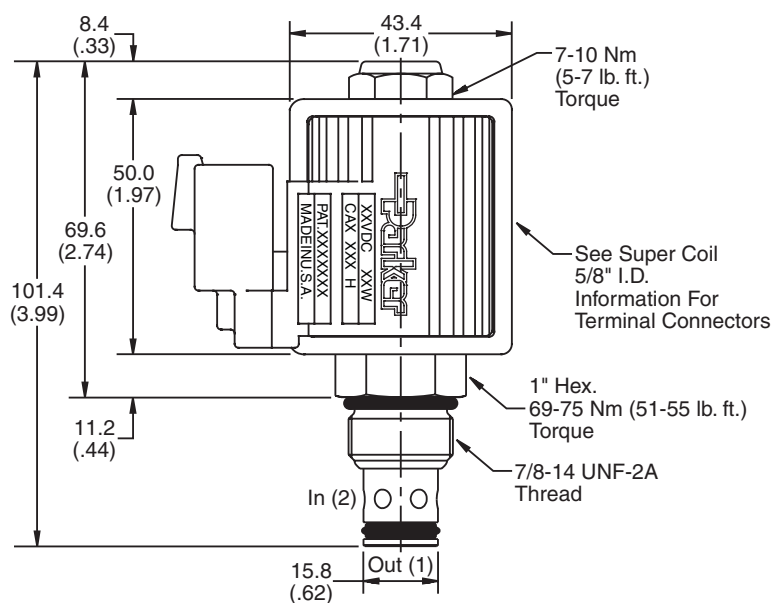

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSH101</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>10 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CHR</b><br>Normally Closed<br>Free reverse flow<br>(Fast response)   |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                        |
|-------------|-----------------------------------------|
| <b>Omit</b> | None                                    |
| <b>E</b>    | Push Type with Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with Flush Rod (N.O. Only)    |
| <b>T</b>    | Push & Twist (N.C. & N.O.)              |

| Code        | Seals / Kit No.          |
|-------------|--------------------------|
| <b>Omit</b> | "D"-Ring / (SK10-2)      |
| <b>N</b>    | Nitrile / (SK10-2N)      |
| <b>V</b>    | Fluorocarbon / (SK10-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP* Coil    | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timert†    |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended †DC Only*

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size | Body Part No.  |
|-------------|-----------|----------------|
| <b>Omit</b> |           | Cartridge Only |
| <b>4P</b>   | 1/4" NPTF | (B10-2-*4P)    |
| <b>6P</b>   | 3/8" NPTF | (B10-2-*6P)    |
| <b>8P</b>   | 1/2" NPTF | (B10-2-*8P)    |
| <b>6T</b>   | SAE-6     | (B10-2-*6T)    |
| <b>8T</b>   | SAE-8     | (B10-2-*8T)    |
| <b>T8T</b>  | SAE-8     | (B10-2-T8T)†   |
| <b>6B</b>   | 3/8" BSPG | (B10-2-6B)†    |

*\* Add "A" for aluminum. omit for steel. † Steel body only.*

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
ControlsFC  
Flow  
ControlsPC  
Pressure  
ControlsLE  
Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description



2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Low hysteresis
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- All external parts zinc plated

## Specifications


|                                |                                                                                                            |                  |              |
|--------------------------------|------------------------------------------------------------------------------------------------------------|------------------|--------------|
| Rated Flow                     | 90 LPM (24 GPM)                                                                                            |                  |              |
| Maximum Inlet Pressure         | 350 Bar (5000 PSI)                                                                                         |                  |              |
| Leakage at 150 SSU (32 cSt)    | 5 drops/min. (.33 cc/min.)                                                                                 |                  |              |
| Minimum Operating Voltage      | 85% of rated voltage at 20°C (72°F).                                                                       |                  |              |
| Response Time                  |                                                                                                            | Energized        | De-Energized |
|                                | C, CR                                                                                                      | 100 ms           | 150 ms       |
|                                | CH, CHR                                                                                                    | 60 ms            | 60 ms        |
|                                | N, NR                                                                                                      | 70 ms            | 150 ms       |
| Cartridge Material             | All parts steel. All operating parts hardened steel.                                                       |                  |              |
| Operating Temp. Range/Seals    | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |              |
| Fluid Compatibility/ Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |                  |              |
| Filtration                     | ISO Code 16/13, SAE Class 4 or better                                                                      |                  |              |
| Approx. Weight                 | .29 kg (.65 lbs.)                                                                                          |                  |              |
| Cavity                         | C12-2<br>(See BC Section for more details)                                                                 |                  |              |
| Form Tool                      | Rougher Finisher                                                                                           | None<br>NFT12-2F |              |

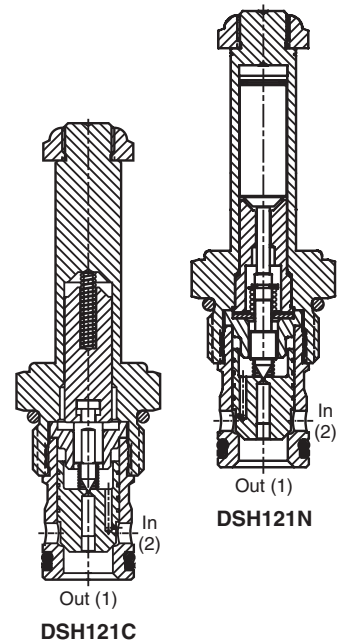


## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)





## Normally Closed

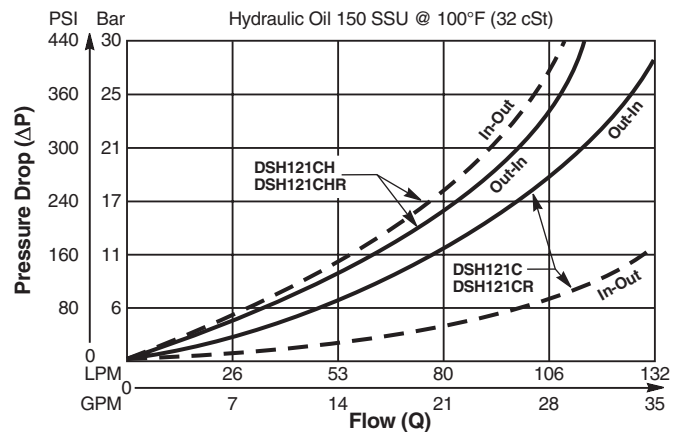

## Normally Open

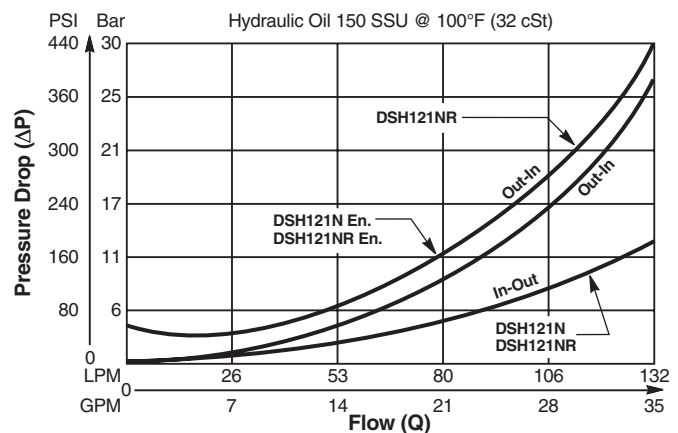

Dimensions    Millimeters (Inches)

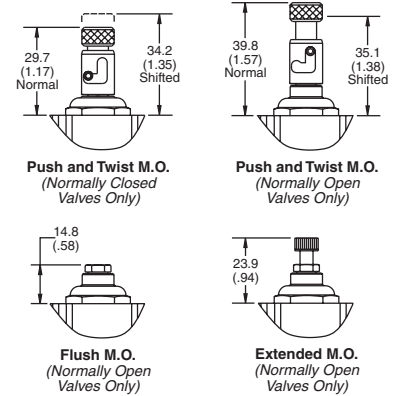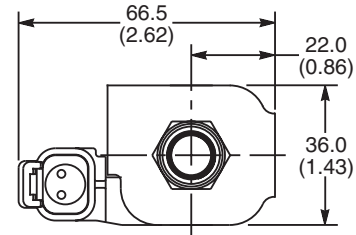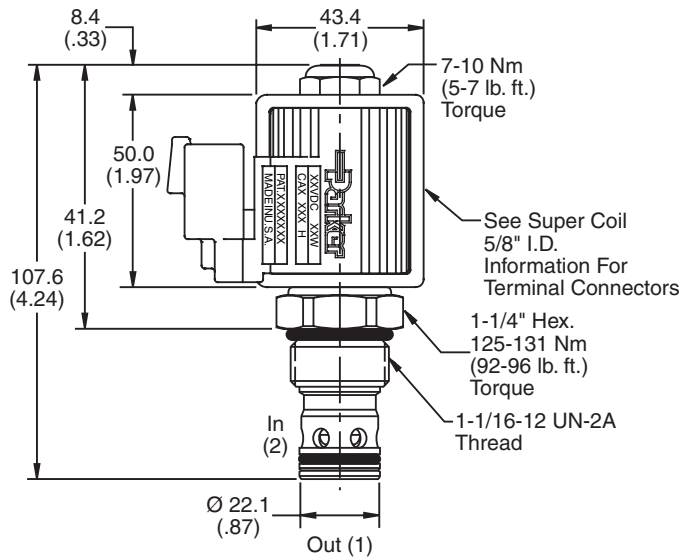

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH121</b>          |       |                 |       |           |              |                  |       |               |           |
| 12 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CHR</b><br>Normally Closed<br>Full reverse flow<br>(Fast response)   |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                        |
|-------------|-----------------------------------------|
| <b>Omit</b> | None                                    |
| <b>E</b>    | Push Type with Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with Flush Rod (N.O. Only)    |
| <b>T</b>    | Push & Twist (N.C. & N.O.)              |

| Code        | Seals / Kit No.          |
|-------------|--------------------------|
| <b>Omit</b> | Nitrile / (SK12-2)       |
| <b>V</b>    | Fluorocarbon / (SK12-2V) |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

\*Recommended

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP* Coil    | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timert†    |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

\*Recommended †DC Only

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>12P</b>  | 3/4" NPTF      | (B12-2-*12P)  |
| <b>8T</b>   | SAE-8          | (B12-2-*8T)   |
| <b>12T</b>  | SAE-12         | (B12-2-*12T)  |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description




2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Low hysteresis
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- Fast response available, (CH) rated at 60 LPM (15 GPM)
- All external parts zinc plated

## Specifications


|                               |                                                                                                            |                                      |                                          |
|-------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------------------|
| Rated Flow                    | 150 LPM (40 GPM)                                                                                           |                                      |                                          |
| Maximum Inlet Pressure        | 210 Bar (3000 PSI)                                                                                         |                                      |                                          |
| Leakage at 150 SSU (32 cSt)   | 20 drops/min. (1.33 cc/min.)                                                                               |                                      |                                          |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                       |                                      |                                          |
| Response Time                 | C, CR<br>CH<br>N, NR                                                                                       | Energized<br>50 ms<br>40 ms<br>45 ms | De-Energized<br>130 ms<br>60 ms<br>75 ms |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                       |                                      |                                          |
| Operating Temp. Range/Seals   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                                      |                                          |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |                                      |                                          |
| Filtration                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |                                      |                                          |
| Approx. Weight                | .34 kg (.75 lbs.)                                                                                          |                                      |                                          |
| Cavity                        | C16-2<br>(See BC Section for more details)                                                                 |                                      |                                          |
| Form Tool                     | Rougher<br>Finisher                                                                                        | None<br>NFT16-2F                     |                                          |

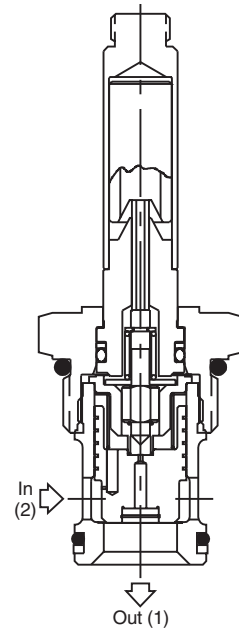


## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)





### Normally Closed

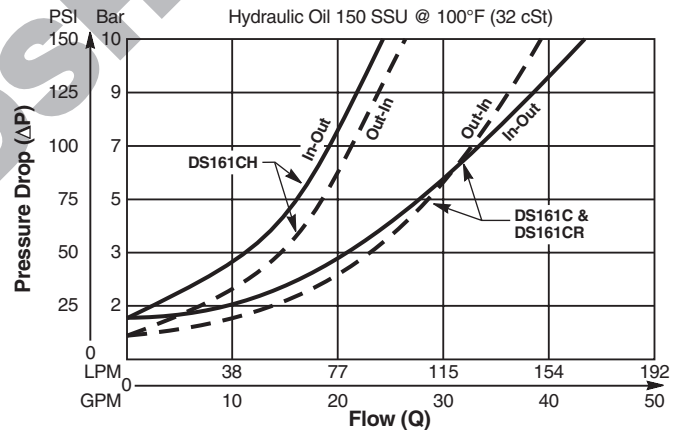

### Normally Open

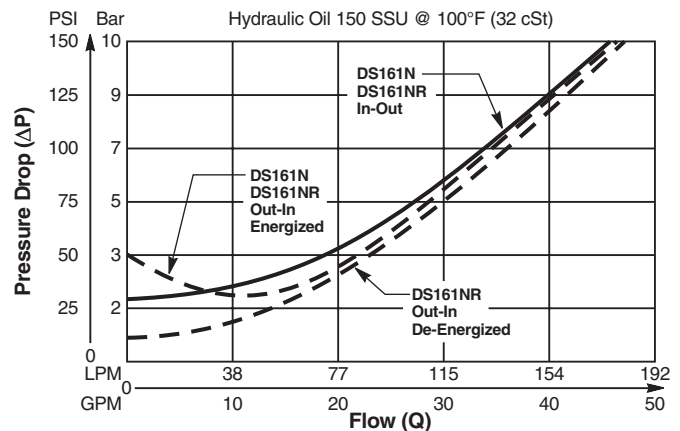

**Dimensions** Millimeters (Inches)

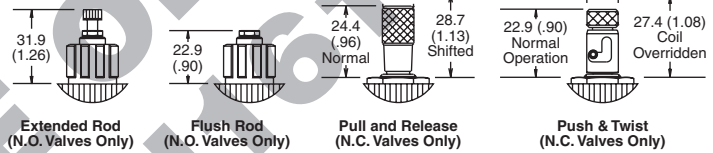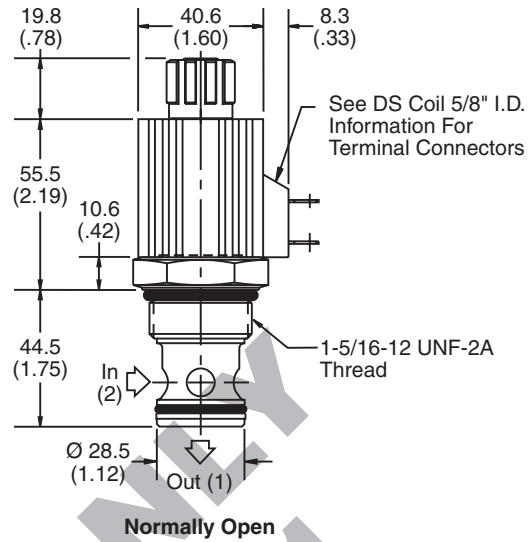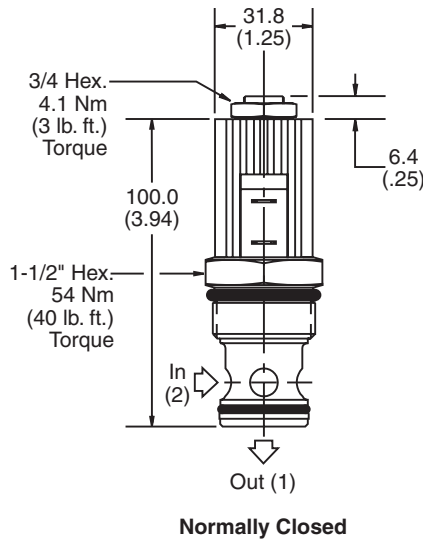

**Ordering Information**

|                               |              |                        |              |                     |                     |                         |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------------|---------------------|-------------------------|----------------------|------------------|
| <b>DS161</b>                  |              |                        |              |                     |                     |                         |                      |                  |
| <b>16 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Coil Voltage</b> | <b>Coil Wattage</b> | <b>Coil Termination</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                              |
|-------------|-----------------------------------------------|
| <b>Omit</b> | None                                          |
| <b>E</b>    | Push Type with<br>Extended Rod<br>(N.O. Only) |
| <b>M</b>    | Push Type with<br>Flush Rod (N.O. Only)       |
| <b>P</b>    | Pull & Release<br>(N.C. Only)                 |
| <b>T</b>    | Push & Twist<br>(N.C. Only)                   |

| Code        | Seals / Kit. No.            |
|-------------|-----------------------------|
| <b>Omit</b> | Nitrile /<br>(SK16-2)       |
| <b>V</b>    | Fluorocarbon /<br>(SK16-2V) |

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| Code        | Wattage      |
|-------------|--------------|
| <b>Omit</b> | Without Coil |
| <b>L</b>    | 17 Watts     |
| <b>H</b>    | 30 Watts     |

| Code        | Coil Termination     |
|-------------|----------------------|
| <b>Omit</b> | Without Coil         |
| <b>C</b>    | Conduit (AC Only)    |
| <b>D</b>    | DIN Plug Face        |
| <b>P</b>    | Dual Spade (DC Only) |
| <b>S</b>    | Dual Screw (DC Only) |
| <b>W</b>    | Dual Lead (DC Only)  |

See DS coil 5/8" I.D.

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>12T</b>  | SAE-12         | (B16-2-*12T)  |
| <b>16T</b>  | SAE-16         | (B16-2-*16T)  |
| <b>12B</b>  | 3/4" BSPG      | (B16-2-*12B)  |
| <b>16B</b>  | 1" BSPG        | (B16-2-16B)†  |

\* Add "A" for aluminum, omit for steel.  
† Steel body only.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features



- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- All external parts zinc plated
- New 350 Bar (5000 PSI) rating

## NOTE:

*This valve will be available January 1, 2011.*

## Specifications


|                                |                                                                                                            |                                      |                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------------------|
| Rated Flow                     | 150 LPM (40 GPM)                                                                                           |                                      |                                          |
| Maximum Inlet Pressure         | 350 Bar (5000 PSI)                                                                                         |                                      |                                          |
| Leakage at 150 SSU (32 cSt)    | 5 drops/min. (.33 cc/min.)                                                                                 |                                      |                                          |
| Minimum Operating Voltage      | 85% of rated voltage at 20°C (72°F).                                                                       |                                      |                                          |
| Response Time                  | C, CR<br>CH<br>N, NR                                                                                       | Energized<br>50 ms<br>40 ms<br>45 ms | De-Energized<br>130 ms<br>60 ms<br>75 ms |
| Cartridge Material             | All parts steel. All operating parts hardened steel.                                                       |                                      |                                          |
| Operating Temp. Range/Seals    | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                                      |                                          |
| Fluid Compatibility/ Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |                                      |                                          |
| Filtration                     | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |                                      |                                          |
| Approx. Weight                 | .34 kg (.75 lbs.)                                                                                          |                                      |                                          |
| Cavity                         | C16-2<br>(See BC Section for more details)                                                                 |                                      |                                          |
| Form Tool                      | Rougher<br>Finisher                                                                                        | None<br>NFT16-2F                     |                                          |

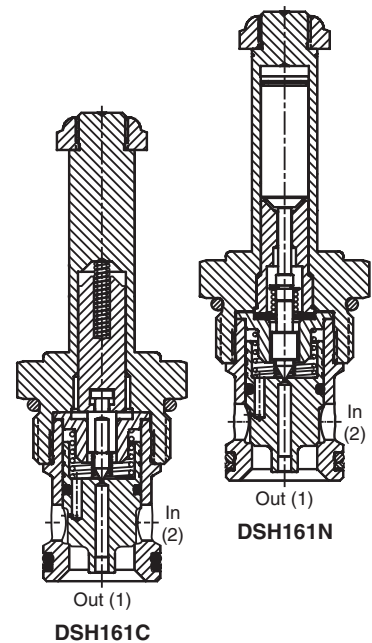


## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)




## Normally Closed

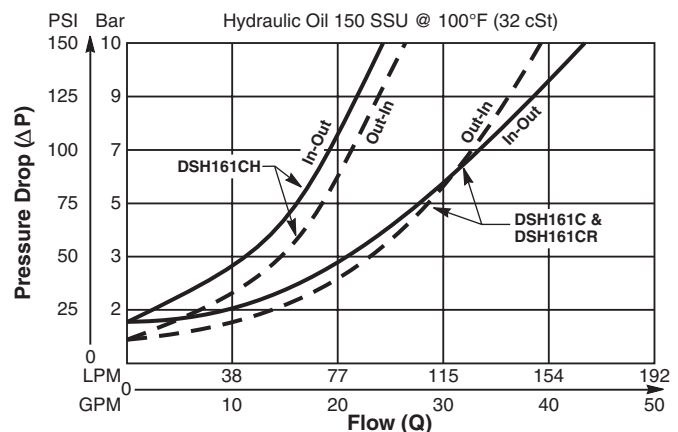


## Normally Open

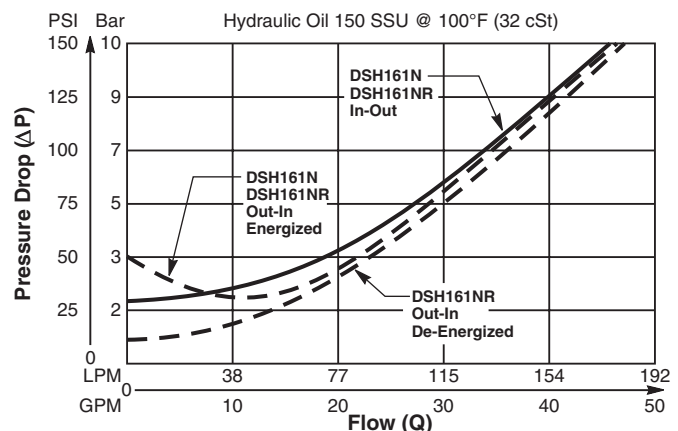


**Dimensions** Millimeters (Inches)

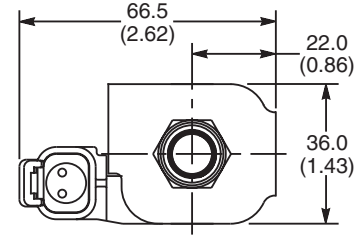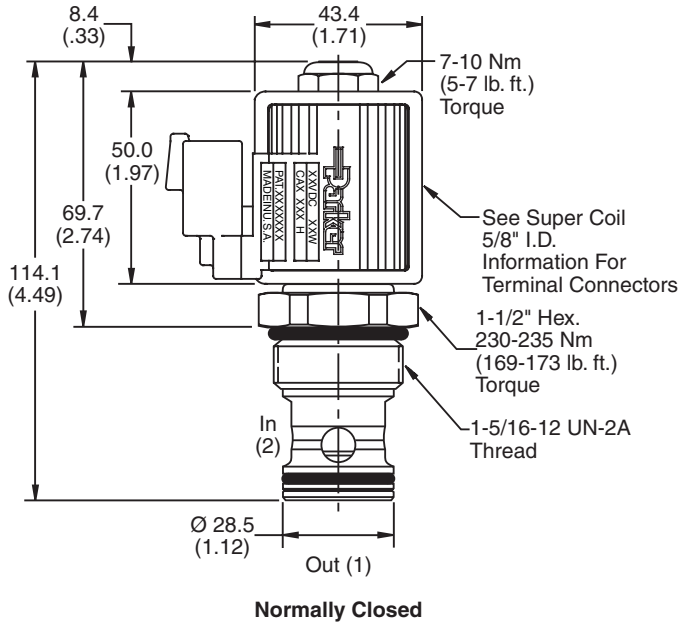


**Push and Twist M.O.**  
(Normally Closed Valves Only)



**Flush M.O.**  
(Normally Open Valves Only)



**Extended M.O.**  
(Normally Open Valves Only)



**Ordering Information**

|                               |              |                        |              |                  |                     |                         |                      |                  |
|-------------------------------|--------------|------------------------|--------------|------------------|---------------------|-------------------------|----------------------|------------------|
| <b>DSH161</b>                 |              |                        |              |                  |                     |                         |                      |                  |
| <b>16 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Body Material</b> | <b>Port Size</b> |

**NOTE: This valve will be available January 1, 2011.**

| Code / Style                                                            |  |
|-------------------------------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow                     |  |
| <b>CH</b><br>Normally Closed<br>Metered reverse flow<br>(Fast response) |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow                       |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow                       |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow                         |  |

| Code        | Override Options                        |
|-------------|-----------------------------------------|
| <b>Omit</b> | None                                    |
| <b>E</b>    | Push Type with Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with Flush Rod (N.O. Only)    |
| <b>T</b>    | Push & Twist (N.C. Only)                |

| Code        | Seals / Kit. No.         |
|-------------|--------------------------|
| <b>Omit</b> | Nitrile / (SK16-2)       |
| <b>V</b>    | Fluorocarbon / (SK16-2V) |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>12T</b>  | SAE-12         | (B16-2-*12T)  |
| <b>16T</b>  | SAE-16         | (B16-2-*16T)  |
| <b>12B</b>  | 3/4" BSPG      | (B16-2-*12B)  |
| <b>16B</b>  | 1" BSPG        | (B16-2-16B)†  |

*\* Add "A" for aluminum, omit for steel.  
† Steel body only.*

| SP*         | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended †DC Only*

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Low hysteresis
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- All external parts zinc plated

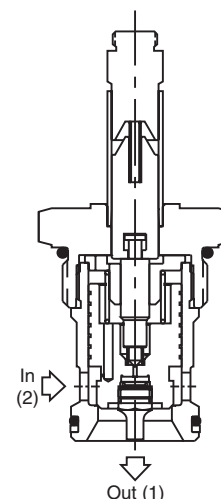


## Specifications




|                                       |                                                                                                            |                  |                     |
|---------------------------------------|------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>  | 260 LPM (70 GPM)                                                                                           |                  |                     |
| <b>Maximum Inlet Pressure</b>         | 210 Bar (3000 PSI)                                                                                         |                  |                     |
| <b>Leakage at 150 SSU (32 cSt)</b>    | 20 drops/min. (1.33 cc/min.)                                                                               |                  |                     |
| <b>Minimum Operating Voltage</b>      | 85% of rated voltage at 20°C (72°F).                                                                       |                  |                     |
| <b>Response Time</b>                  |                                                                                                            | <b>Energized</b> | <b>De-Energized</b> |
|                                       | <b>C, CR<br/>N, NR</b>                                                                                     | 350 ms<br>300 ms | 160 ms<br>45 ms     |
| <b>Cartridge Material</b>             | All parts steel. All operating parts hardened steel.                                                       |                  |                     |
| <b>Operating Temp. Range/Seals</b>    | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |                     |
| <b>Fluid Compatibility/ Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |                  |                     |
| <b>Filtration</b>                     | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |                  |                     |
| <b>Approx. Weight</b>                 | .34 kg (.75 lbs.)                                                                                          |                  |                     |
| <b>Cavity</b>                         | C20-2<br>(See BC Section for more details)                                                                 |                  |                     |
| <b>Form Tool</b>                      | Rougher<br>Finisher                                                                                        | None<br>NFT20-2F |                     |

## Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

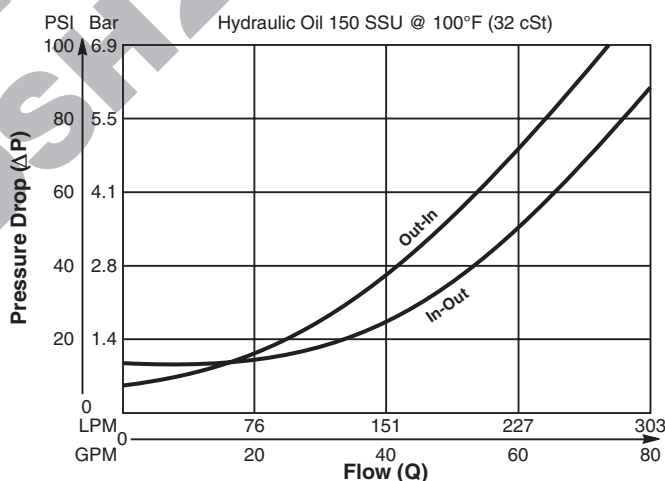

**Dimensions** Millimeters (Inches)

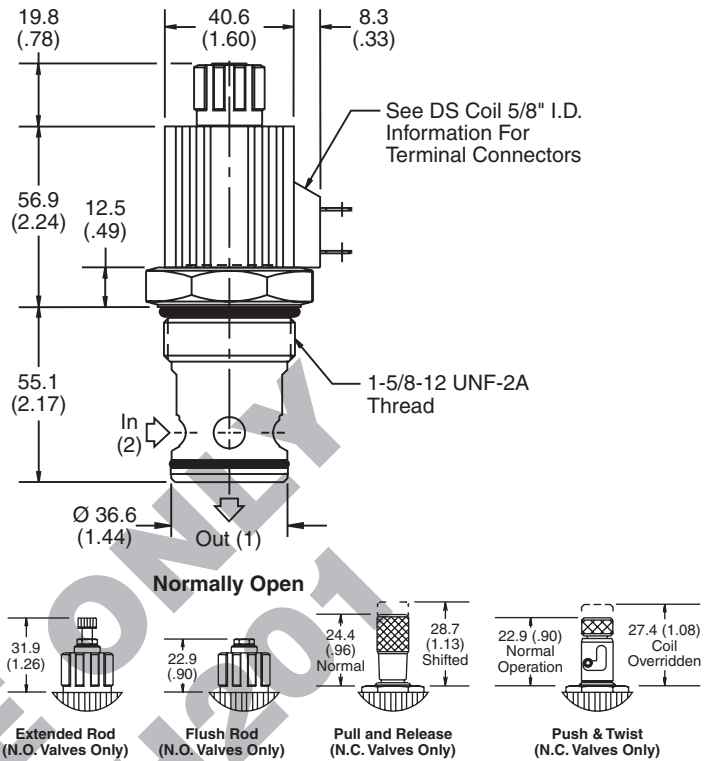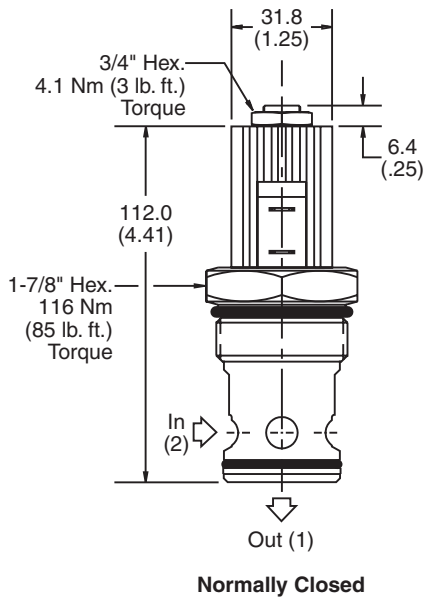

**Ordering Information**

|                               |              |                        |              |                     |                     |                         |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------------|---------------------|-------------------------|----------------------|------------------|
| <b>DS201</b>                  |              |                        |              |                     |                     |                         |                      |                  |
| <b>20 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Coil Voltage</b> | <b>Coil Wattage</b> | <b>Coil Termination</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                                        |  |
|-----------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow   |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow   |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow     |  |

| Code        | Override Options                        |
|-------------|-----------------------------------------|
| <b>Omit</b> | None                                    |
| <b>E</b>    | Push Type with Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with Flush Rod (N.O. Only)    |
| <b>P</b>    | Pull & Release (N.C. Only)              |
| <b>T</b>    | Push & Twist (N.C. Only)                |

| Code        | Seals / Kit. No.         |
|-------------|--------------------------|
| <b>Omit</b> | Nitrile / (SK20-2)       |
| <b>V</b>    | Fluorocarbon / (SK20-2V) |

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| Code        | Wattage      |
|-------------|--------------|
| <b>Omit</b> | Without Coil |
| <b>L</b>    | 17 Watts     |
| <b>H</b>    | 30 Watts     |

| Code        | Coil Termination     |
|-------------|----------------------|
| <b>Omit</b> | Without Coil         |
| <b>C</b>    | Conduit (AC Only)    |
| <b>D</b>    | DIN Plug Face        |
| <b>P</b>    | Dual Spade (DC Only) |
| <b>S</b>    | Dual Screw (DC Only) |
| <b>W</b>    | Dual Lead (DC Only)  |

See DS coil 5/8" I.D.

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>20T</b>  | SAE-20         | (B20-2-20T)   |
| <b>20B</b>  | 1-1/4" BSPG    | (B20-2-20B)   |

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Poppet Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features



- Replaceable, one piece encapsulated coils with minimal amperage draw
- Various coil terminations and voltages
- Various manual override options
- All external parts zinc plated
- New 250 Bar (3600 PSI) rating

### NOTE:

*This valve will be available January 1, 2011.*


## Specifications

|                                               |                                                                                                            |                  |                     |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 260 LPM (70 GPM)                                                                                           |                  |                     |
| <b>Maximum Inlet Pressure</b>                 | 250 Bar (3600 PSI)                                                                                         |                  |                     |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 5 drops/min. (.33 cc/min.)                                                                                 |                  |                     |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at 20°C (72°F).                                                                       |                  |                     |
| <b>Response Time</b>                          |                                                                                                            | <b>Energized</b> | <b>De-Energized</b> |
|                                               | <b>C, CR</b>                                                                                               | 350 ms           | 160 ms              |
|                                               | <b>N, NR</b>                                                                                               | 300 ms           | 45 ms               |
| <b>Cartridge Material</b>                     | All parts steel. All operating parts hardened steel.                                                       |                  |                     |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                  |                     |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |                  |                     |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |                  |                     |
| <b>Approx. Weight</b>                         | .34 kg (.75 lbs.)                                                                                          |                  |                     |
| <b>Cavity</b>                                 | C20-2<br>(See BC Section for more details)                                                                 |                  |                     |
| <b>Form Tool</b>                              | Rougher                                                                                                    | None             |                     |
|                                               | Finisher                                                                                                   | NFT20-2F         |                     |


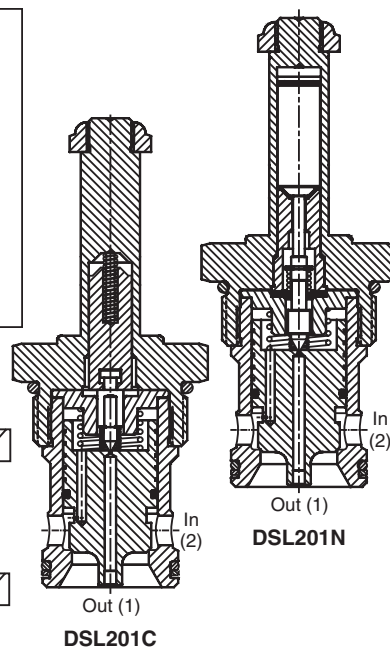



## Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

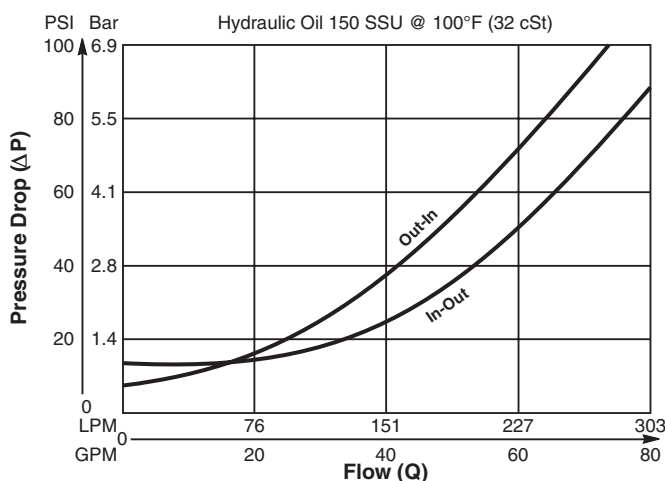

**Dimensions** Millimeters (Inches)

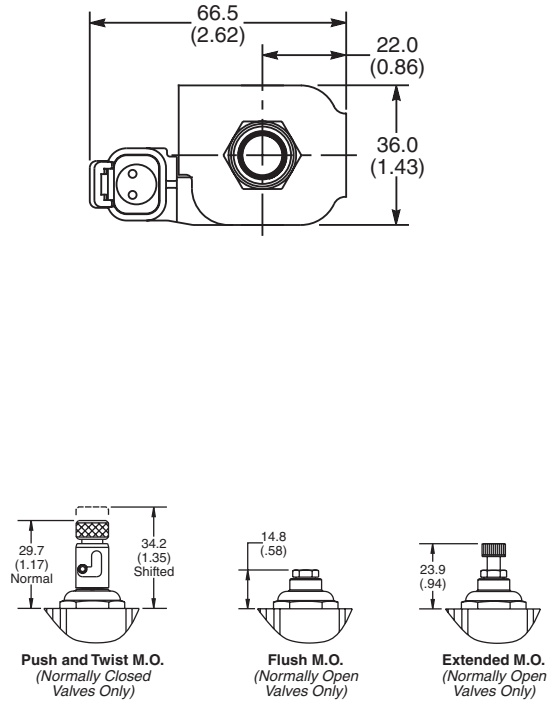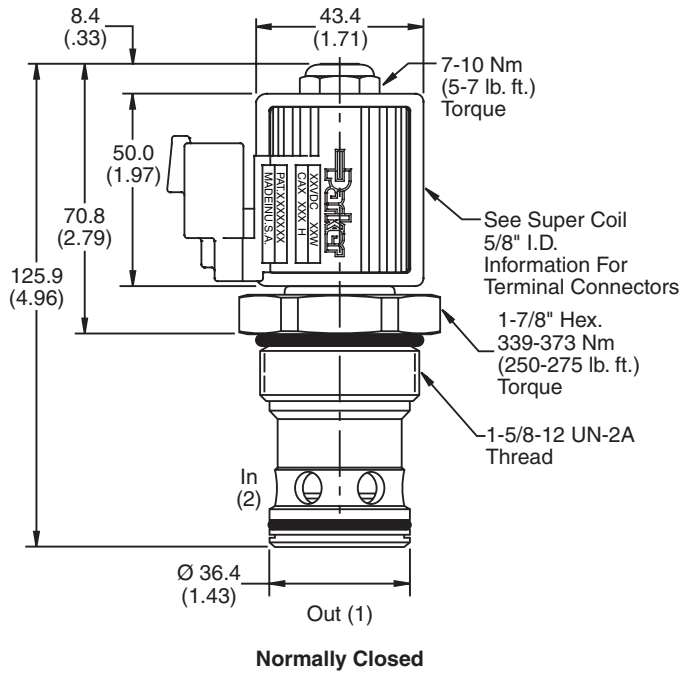

**Ordering Information**

|                        |       |                 |       |           |              |                  |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>DSL201</b>          |       |                 |       |           |              |                  |               |           |
| 20 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

**NOTE: This valve will be available January 1, 2011.**

| Code / Style                                        |  |
|-----------------------------------------------------|--|
| <b>C</b><br>Normally Closed<br>Metered reverse flow |  |
| <b>CR</b><br>Normally Closed<br>Free reverse flow   |  |
| <b>N</b><br>Normally Open<br>Metered reverse flow   |  |
| <b>NR</b><br>Normally Open<br>Free reverse flow     |  |

| Code        | Override Options                        |
|-------------|-----------------------------------------|
| <b>Omit</b> | None                                    |
| <b>E</b>    | Push Type with Extended Rod (N.O. Only) |
| <b>M</b>    | Push Type with Flush Rod (N.O. Only)    |
| <b>T</b>    | Push & Twist (N.C. Only)                |

| Code        | Seals / Kit. No.         |
|-------------|--------------------------|
| <b>Omit</b> | Nitrile / (SK20-2)       |
| <b>V</b>    | Fluorocarbon / (SK20-2V) |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

**\*Recommended**

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP* Coil    | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

**\*Recommended †DC Only**

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>20T</b>  | SAE-20         | (B20-2-*20T)  |
| <b>20B</b>  | 1-1/4" BSPG    | (B20-2-*20B)  |

**\* Add "A" for aluminum, omit for steel.**

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Closed Poppet Valve With Flow Control Adjustment. This valve maintains constant flow at  $\Delta P \geq 20$  Bar (300 PSI) regardless of load pressure changes upstream of the valve at port 2.

## Features

- Light weight alloy housing with hardened steel moving parts
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 04 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

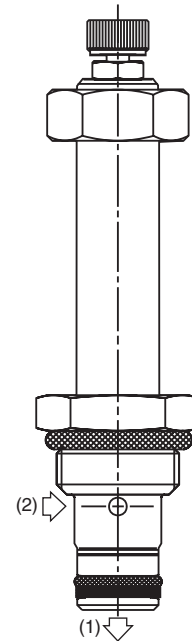


## Specifications

|                                                         |                                                                                                              |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI <math>\Delta P</math>)</b> | 9.5 LPM (2.5 GPM)                                                                                            |
| <b>Maximum Inlet Pressure</b>                           | <b>High Pressure</b><br>285 Bar (4000 PSI)                                                                   |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>                  | 5 drops/min. (.33 cc/min.)                                                                                   |
| <b>Minimum<br/>Operating Voltage</b>                    | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                                    | <b>Open</b> 20 ms<br><b>Close</b> 25 ms                                                                      |
| <b>Cartridge Material</b>                               | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>                  | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b>           | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                                       | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                                   | .09 kg (.19 lbs.)                                                                                            |
| <b>Cavity</b>                                           | C08-2<br>(See BC Section for more details)                                                                   |


## Performance Curves

(Through cartridge only)


### Pressure Compensation For Different Flow Settings

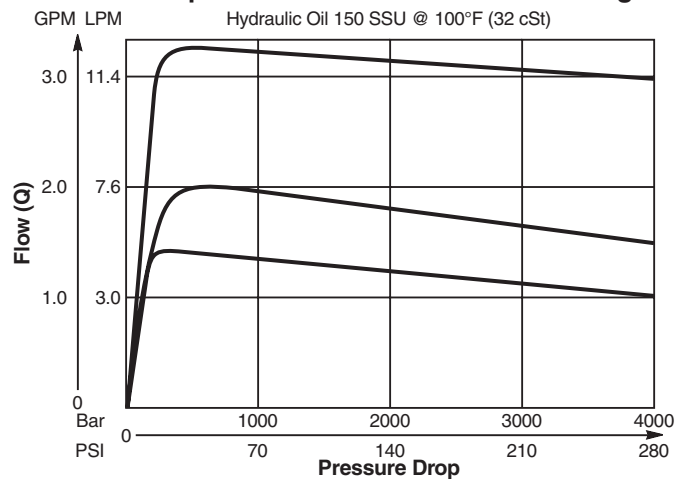

### Reverse Flow

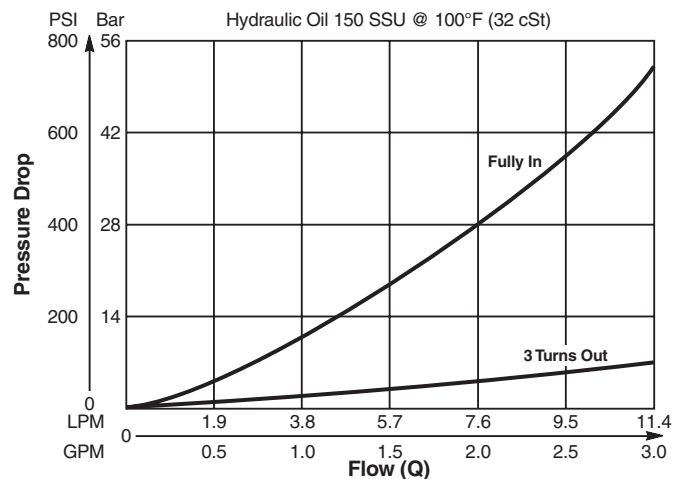

**Dimensions** Millimeters (Inches)

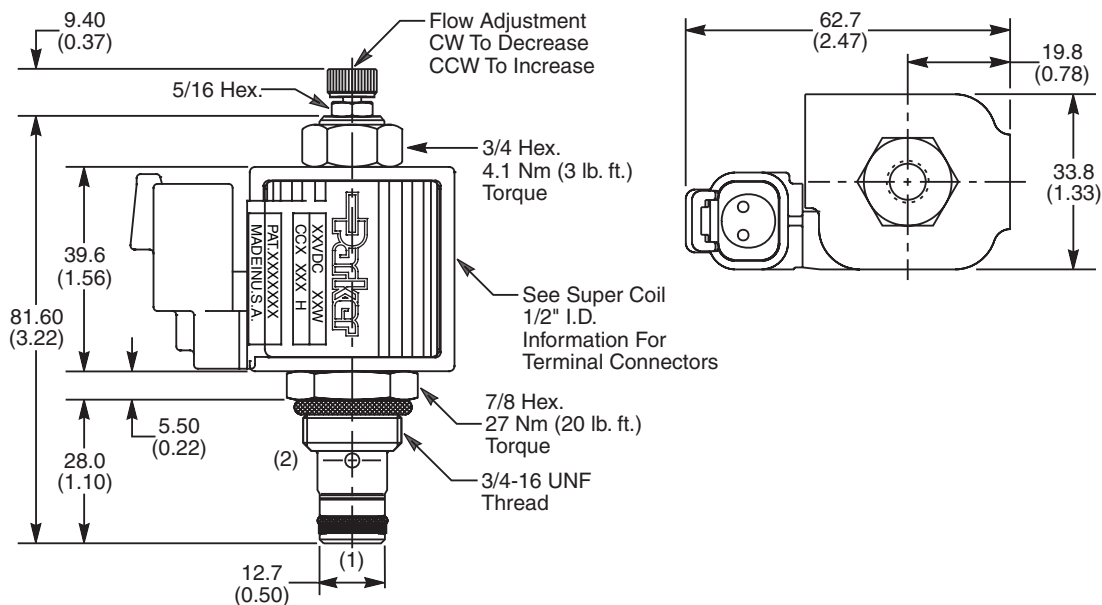

**Ordering Information**

|                        |                       |        |       |           |              |                  |               |           |
|------------------------|-----------------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GH02</b>            | <b>01</b>             |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style Normally Closed | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                     |
|------|---------------------------|
| 01   | High Pressure ('SP' Coil) |

| Code | Screen         |
|------|----------------|
| 0    | None           |
| 1    | 60 Mesh Screen |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30006N-1) |
| V    | Fluorocarbon / (SK30006V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B08-2-*6T)   |
| 6B   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Closed Poppet Valve.  
Bi-Directional Direct Acting. For additional information  
see Technical Tips on pages SV1-SV6.

## Features

- Fast Response
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 04 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

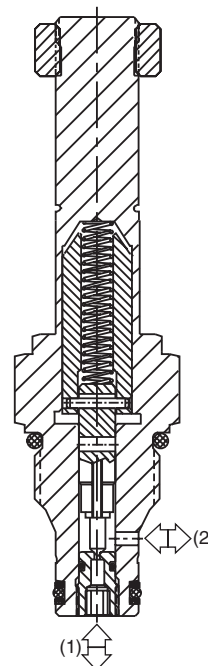


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 1 LPM (0.26 GPM)                                                                                             |
| <b>Maximum Inlet Pressure</b>                 | 210 Bar (3000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 72 5 drops/min. (.33 cc/min.)<br>73 Zero Drops Soft (Delrin) Seat                                            |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | <b>Open</b> 10 ms<br><b>Close</b> 10 ms                                                                      |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .14 kg (.31 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C08-2<br>(See BC Section for more details)                                                                   |

## Performance Curve

## Pressure Drop vs. Flow (Through cartridge only)

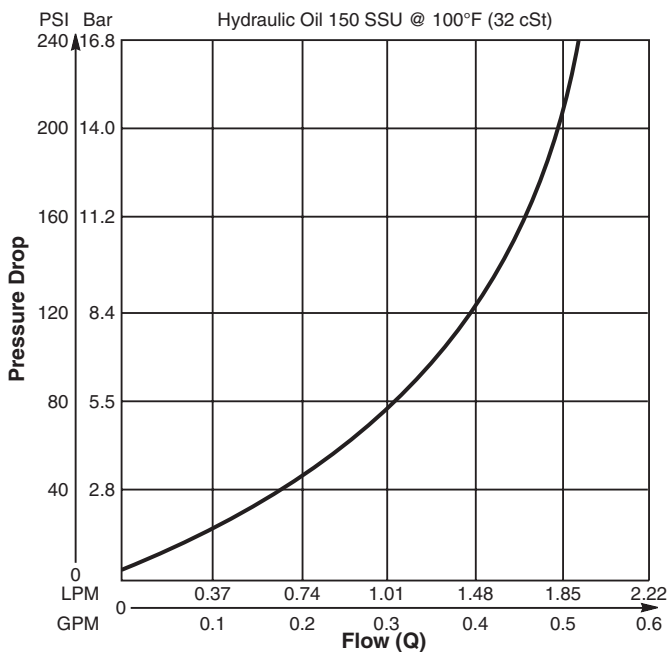

Dimensions    Millimeters (Inches)

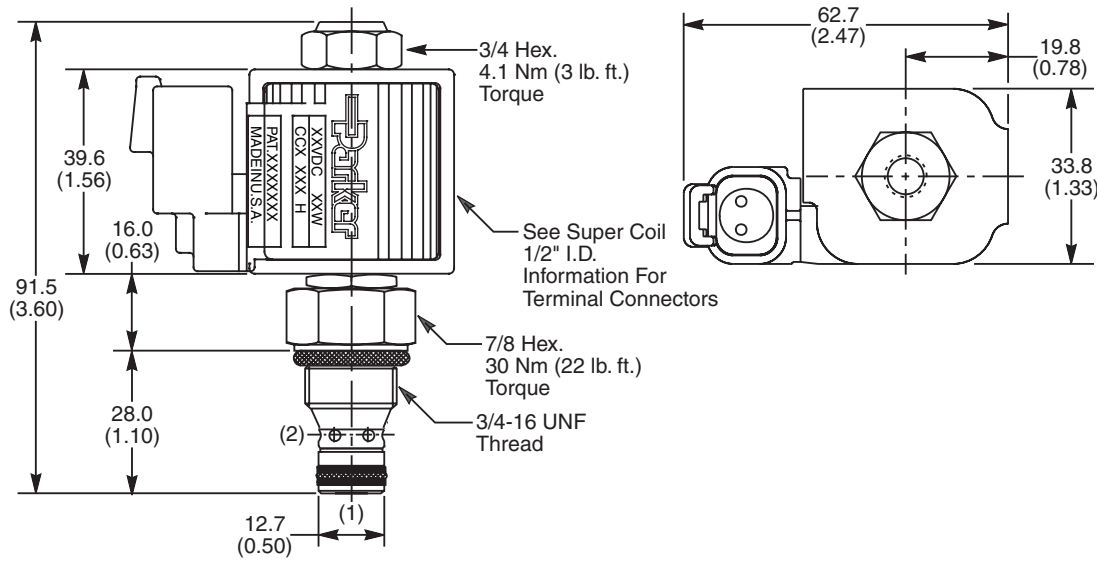

Ordering Information

|                        |                       |                 |        |       |           |              |                  |               |           |
|------------------------|-----------------------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            |                       |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style Normally Closed | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                  |
|------|------------------------|
| 72   | Standard ('SP' Coil)   |
| 73   | Zero Drops ('SP' Coil) |

| Code | Override Options |
|------|------------------|
| 0    | None             |

| Code | Screen         |
|------|----------------|
| 0    | None           |
| 1    | 60 Mesh Screen |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30088N-1) |
| V    | Fluorocarbon / (SK30088V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B08-2-*6T)   |
| 6B   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

General Description

2-Way, 2 Position, Normally Closed, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O’Rings; Coil is interchangeable with 04 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

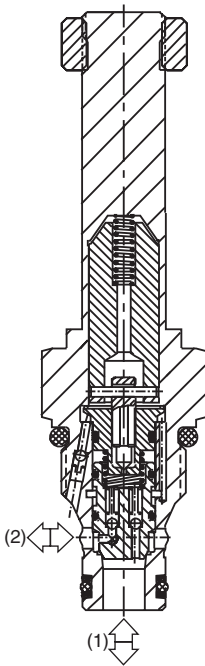


Specifications



|                                      |                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Rated Flow<br>(At 70 PSI ΔP)         | 2 to 1 34 LPM (9 GPM)<br>1 to 2 19 LPM (5 GPM)                                                               |
| Maximum Inlet<br>Pressure            | 80 210 Bar (3000 PSI)<br>81 350 Bar (5000 PSI)                                                               |
| Leakage at<br>150 SSU (32 cSt)       | 5 drops/min. (.33 cc/min.)                                                                                   |
| Minimum<br>Operating Voltage         | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| Response Time                        | Open 40 ms<br>Close 40 ms                                                                                    |
| Cartridge Material                   | All parts steel. All operating<br>parts hardened steel.                                                      |
| Operating Temp.<br>Range/Seals       | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| Fluid<br>Compatibility/<br>Viscosity | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| Filtration                           | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| Approx. Weight                       | .14 kg (.31 lbs.)                                                                                            |
| Cavity                               | C08-2<br>(See BC Section for more details)                                                                   |

Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

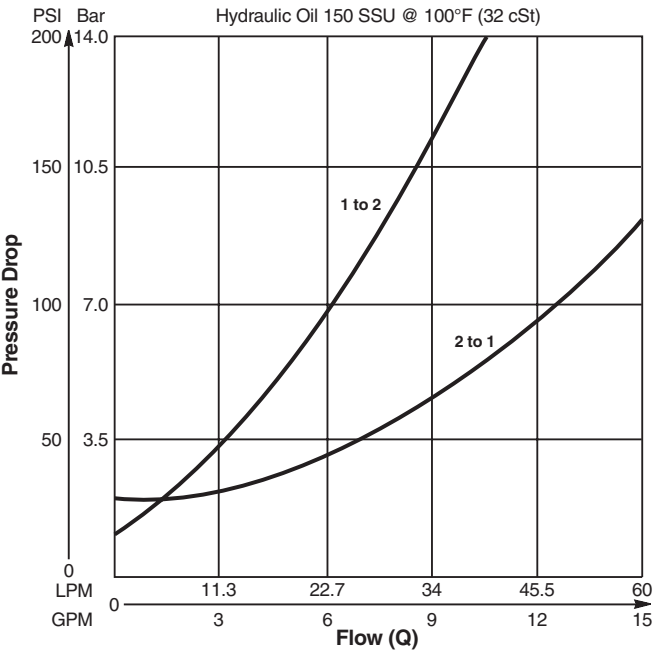

**Dimensions** Millimeters (Inches)

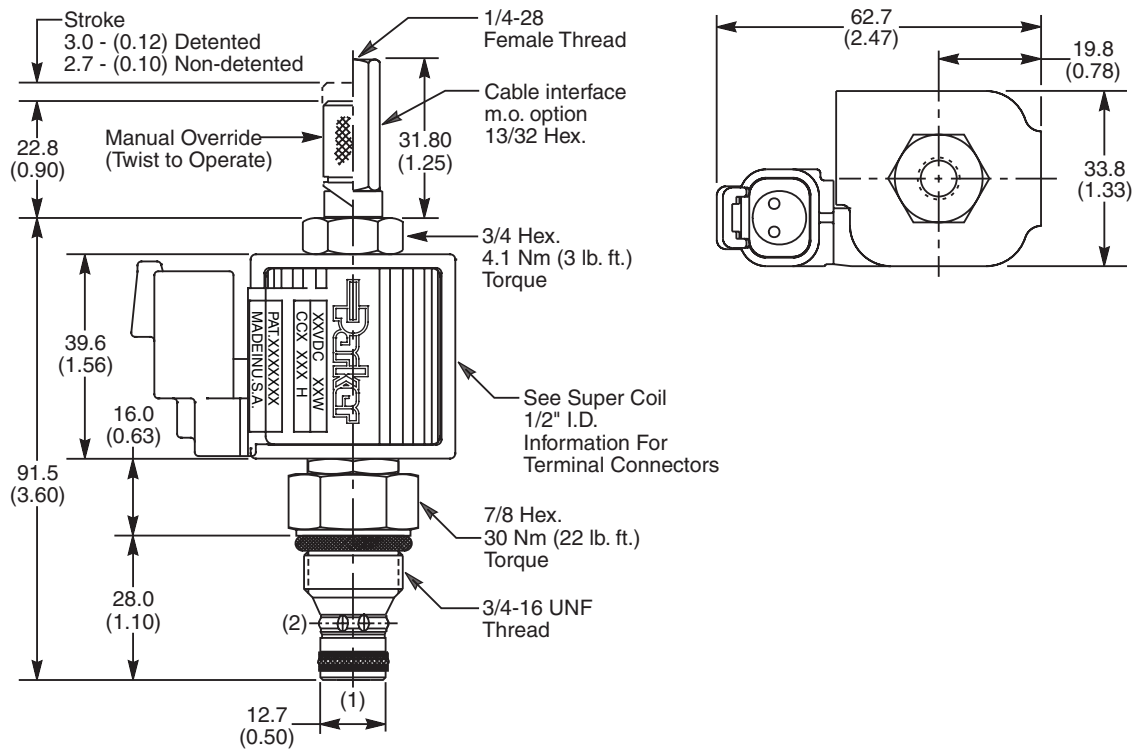

**Ordering Information**

|                                  |                                 |                           |               |              |                     |                        |                            |                         |                     |
|----------------------------------|---------------------------------|---------------------------|---------------|--------------|---------------------|------------------------|----------------------------|-------------------------|---------------------|
| <b>GS02</b>                      |                                 |                           |               |              |                     |                        |                            |                         |                     |
| <b>08 Size</b><br>Solenoid Valve | <b>Style</b><br>Normally Closed | <b>Override</b><br>Option | <b>Screen</b> | <b>Seals</b> | <b>Coil</b><br>Type | <b>Coil</b><br>Voltage | <b>Coil</b><br>Termination | <b>Body</b><br>Material | <b>Port</b><br>Size |

| Code      | Style                     |
|-----------|---------------------------|
| <b>80</b> | Standard ('SS' Coil)      |
| <b>81</b> | High Pressure ('SP' Coil) |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30088N-1) |

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code     | Override Options                      |
|----------|---------------------------------------|
| <b>0</b> | None                                  |
| <b>1</b> | Detented                              |
| <b>2</b> | Non-Detented                          |
| <b>3</b> | Cable Interface<br>210 Bar (3000 PSI) |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SS</b>   | Super Coil - 14 Watts |
| <b>SP</b>   | Super Coil - 19 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>6T</b>   | SAE-6          | (B08-2-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

See Super Coil 1/2" I.D.  
 \*DC Only

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Closed, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 02 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

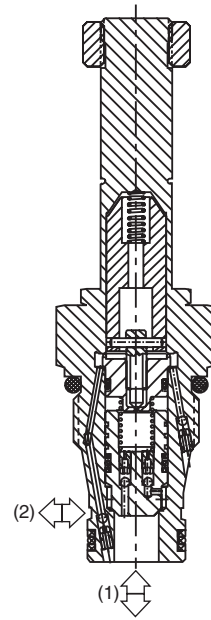


## Specifications


|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | <b>2 to 1</b> 68 LPM (18 GPM)<br><b>1 to 2</b> 46 LPM (12 GPM)                                             |
| <b>Maximum Inlet Pressure</b>        | <b>80</b> 210 Bar (3000 PSI)<br><b>81</b> 350 Bar (5000 PSI)                                               |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 5 drops/min. (.33 cc/min.)                                                                                 |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                 | See Performance Curves                                                                                     |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | .17 kg (.37 lbs.)                                                                                          |
| <b>Cavity</b>                        | 2R<br>(See BC Section for more details)                                                                    |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

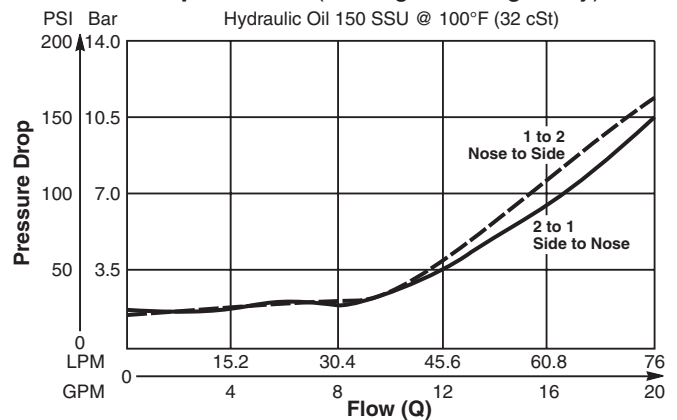

### Response Time vs. Flow

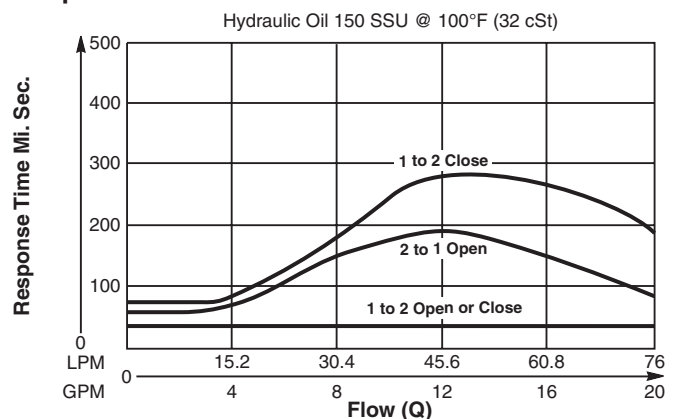

**Dimensions** Millimeters (Inches)

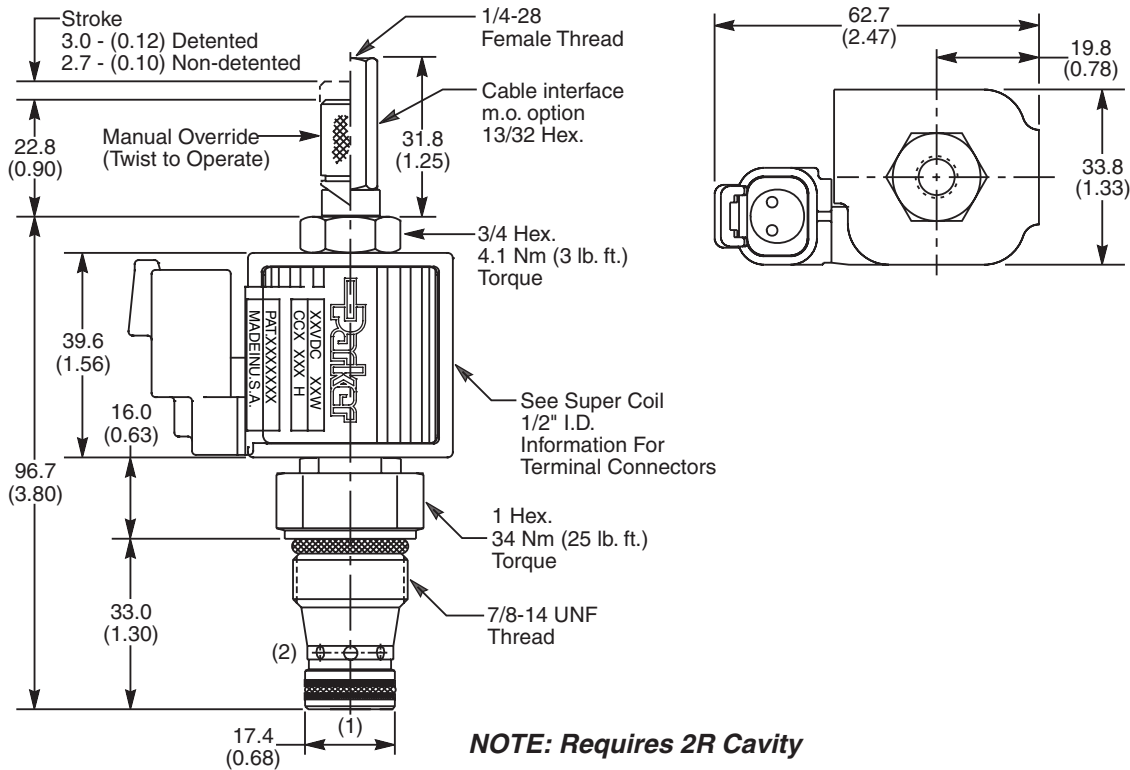

**Ordering Information**

|                           |                             |                    |        |       |              |                 |                     |
|---------------------------|-----------------------------|--------------------|--------|-------|--------------|-----------------|---------------------|
| <b>GS04</b>               |                             |                    |        |       |              |                 |                     |
| 10 Size<br>Solenoid Valve | Style<br>Normally<br>Closed | Override<br>Option | Screen | Seals | Coil<br>Type | Coil<br>Voltage | Coil<br>Termination |

| Code | Style                     |
|------|---------------------------|
| 80   | Standard ('SS' Coil)      |
| 81   | High Pressure ('SP' Coil) |

| Code | Seals / Kit No.                         |
|------|-----------------------------------------|
| N    | Nitrile / Buna-N (Std.)<br>(SK30113N-1) |

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Override Options                      |
|------|---------------------------------------|
| 0    | None                                  |
| 1    | Detented                              |
| 2    | Non-Detented                          |
| 3    | Cable Interface<br>210 Bar (3000 PSI) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SS   | Super Coil - 14 Watts |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Screen |
|------|--------|
| 0    | None   |

**Order Bodies Separately**

|             |         |                  |
|-------------|---------|------------------|
| <b>LB10</b> |         |                  |
| Line Body   | Porting | Body<br>Material |

| Code | Porting  |
|------|----------|
| 543  | 1/2" SAE |
| 545  | 1/2" BSP |

| Code | Body Material |
|------|---------------|
| A    | Aluminum      |
| S    | Steel         |

**CV**

Check  
Valves

**SH**

Shuttle  
Valves

**LM**

Load/Motor  
Controls

**FC**

Flow  
Controls

**PC**

Pressure  
Controls

**LE**

Logic  
Elements

**DC**

Directional  
Controls

**MV**

Manual  
Valves

**SV**

Solenoid  
Valves

**PV**

Proportional  
Valves

**CE**

Coils &  
Electronics

**BC**

Bodies &  
Cavities

**TD**

Technical  
Data

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
ElementsDC  
Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Closed, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 02 and 04 series poppet valves; Symmetrical coil can be reversed without affecting performance.

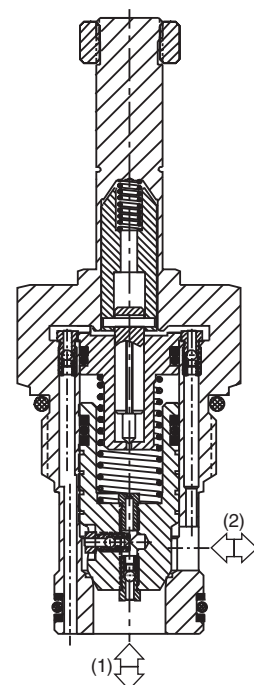


## Specifications


|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | 190 LPM (50 GPM)                                                                                           |
| <b>Maximum Inlet Pressure</b>        | <b>80</b> 210 Bar (3000 PSI)<br><b>81</b> 350 Bar (5000 PSI)                                               |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 9 drops/min. (.58 cc/min.)                                                                                 |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                 | See Performance Curves                                                                                     |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | 0.4 kg (.88 lbs.)                                                                                          |
| <b>Cavity</b>                        | C16-2<br>(See BC Section for more details)                                                                 |

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

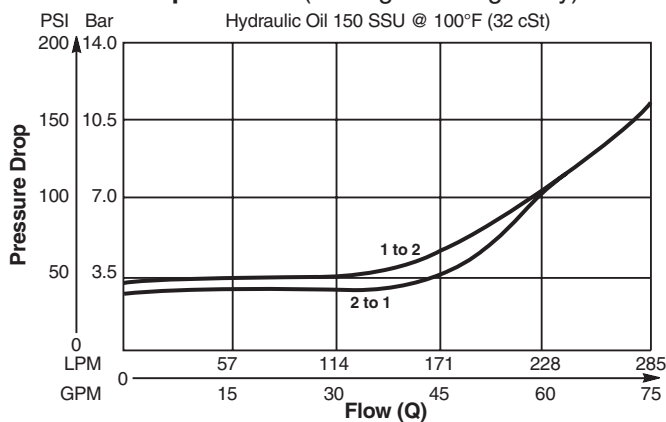

## Response Time vs. Flow

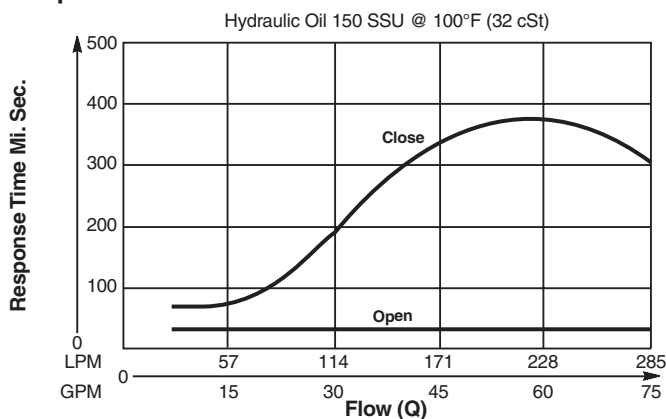

Dimensions    Millimeters (Inches)

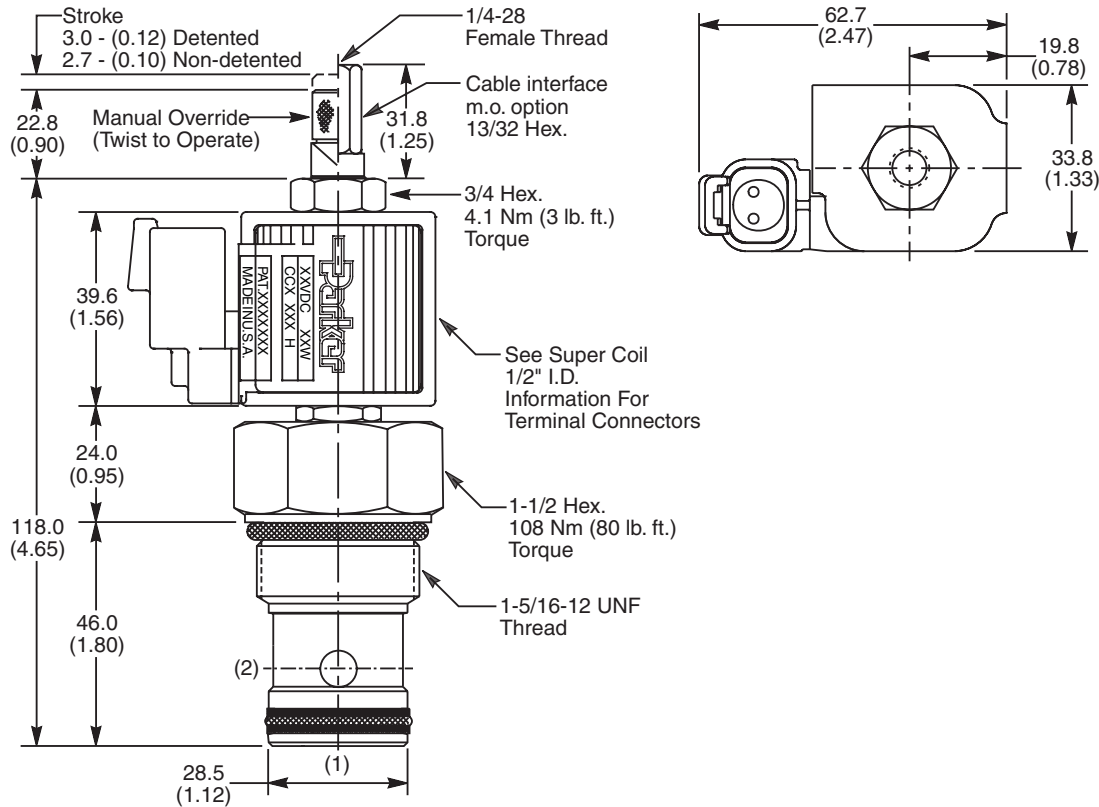

Ordering Information

|                        |                       |                 |        |       |           |              |                  |               |           |
|------------------------|-----------------------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS06</b>            |                       |                 |        |       |           |              |                  |               |           |
| 16 Size Solenoid Valve | Style Normally Closed | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                     |
|------|---------------------------|
| 80   | Standard ('SS' Coil)      |
| 81   | High Pressure ('SP' Coil) |

| Code | Override Options                      |
|------|---------------------------------------|
| 0    | None                                  |
| 1    | Detented                              |
| 2    | Non-Detented                          |
| 3    | Cable Interface<br>210 Bar (3000 PSI) |

| Code | Screen |
|------|--------|
| 0    | None   |

| Code | Seals / Kit No.                         |
|------|-----------------------------------------|
| N    | Nitrile / Buna-N (Std.)<br>(SK30089N-1) |
| V    | Fluorocarbon /<br>(SK30089V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SS   | Super Coil - 14 Watts |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 16T  | SAE-16         | (B16-2-*16T)  |
| 16B  | 1" BSPG        | (B16-2-16B)†  |

\* Add "A" for aluminum, omit for steel.  
† Steel body only.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Open Poppet Valve.  
Bi-Directional Direct Acting. For additional information  
see Technical Tips on pages SV1-SV6.

## Features

- Fast Response
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 04 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

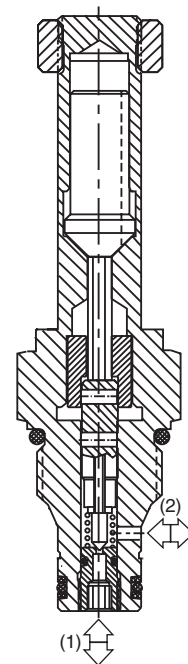


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 1 LPM (0.26 GPM)                                                                                             |
| <b>Maximum Inlet Pressure</b>                 | 210 Bar (3000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | <b>77</b> 5 drops/min. (.33 cc/min.)<br><b>78</b> Zero Drops Soft (Delrin) Seat                              |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | <b>Open</b> 10 ms<br><b>Close</b> 10 ms                                                                      |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .14 kg (.31 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C08-2<br>(See BC Section for more details)                                                                   |

## Performance Curve

## Pressure Drop vs. Flow (Through cartridge only)

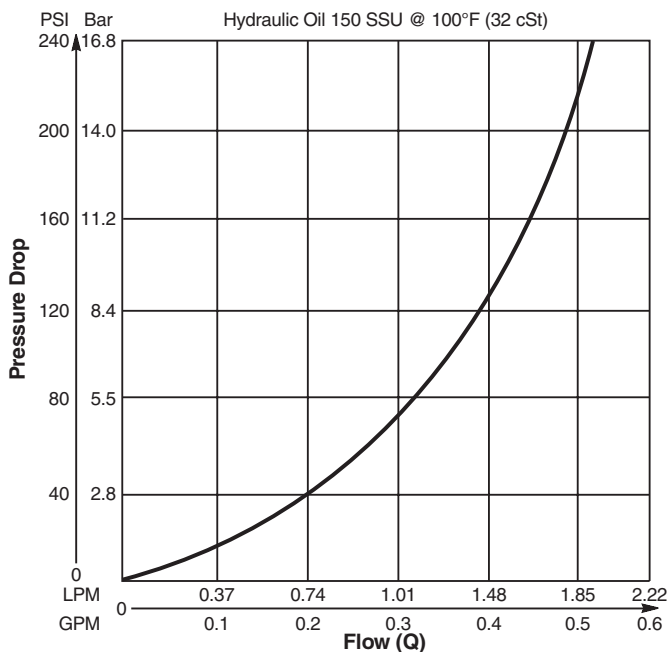

**Dimensions** Millimeters (Inches)

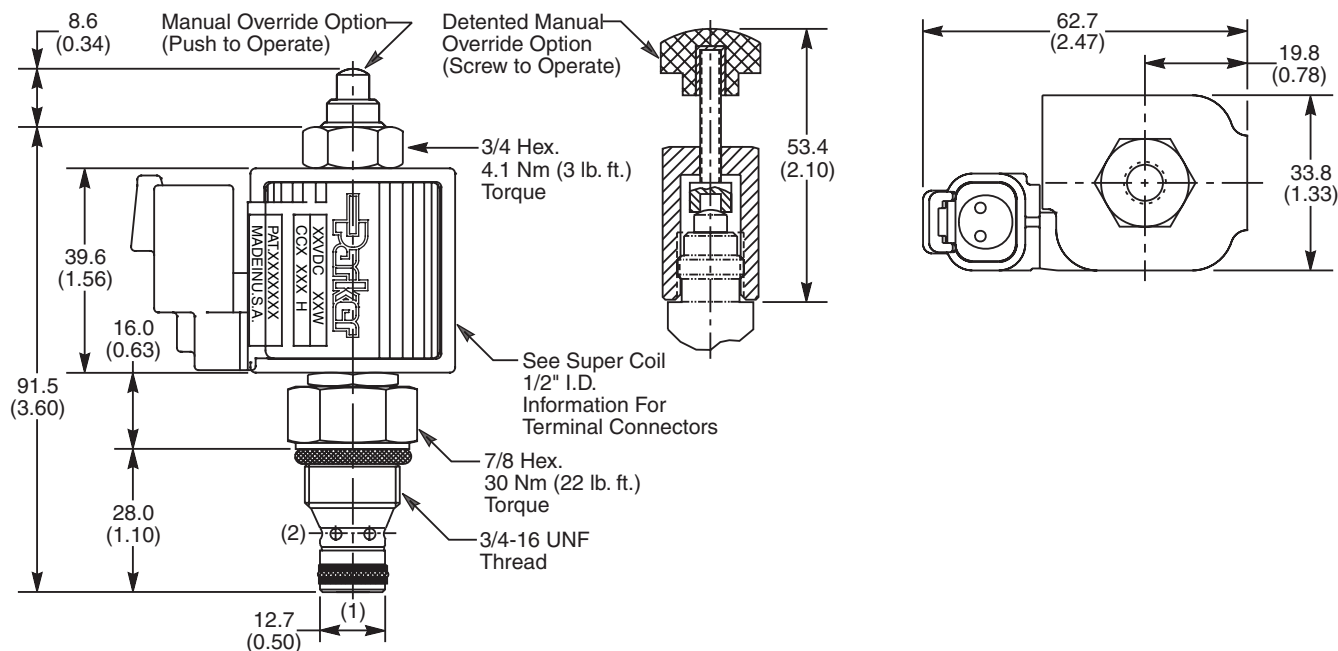

**Ordering Information**

|                               |                            |                        |               |              |                  |                     |                         |                      |                  |
|-------------------------------|----------------------------|------------------------|---------------|--------------|------------------|---------------------|-------------------------|----------------------|------------------|
| <b>GS02</b>                   |                            |                        |               |              |                  |                     |                         |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style Normally Open</b> | <b>Override Option</b> | <b>Screen</b> | <b>Seals</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code      | Style                  |
|-----------|------------------------|
| <b>77</b> | Standard ('SP' Coil)   |
| <b>78</b> | Zero Drops ('SP' Coil) |

| Code     | Override Options         |
|----------|--------------------------|
| <b>0</b> | None                     |
| <b>1</b> | Manual Override          |
| <b>2</b> | Detented Part No. 900690 |

| Code     | Screen         |
|----------|----------------|
| <b>0</b> | None           |
| <b>1</b> | 60 Mesh Screen |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30088N-1) |
| <b>V</b> | Fluorocarbon / (SK30088V-1)          |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP</b>   | Super Coil - 19 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>6T</b>   | SAE-6          | (B08-2-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Open, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 04 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

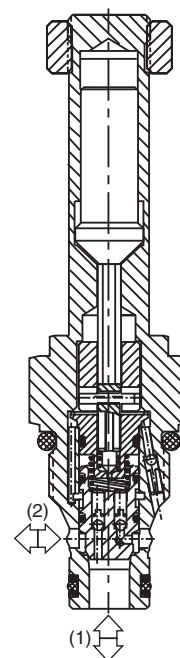


## Specifications



|                                       |                                                                                                            |
|---------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>  | <b>2 to 1</b> 34 LPM (9 GPM)<br><b>1 to 2</b> 19 LPM (5 GPM)                                               |
| <b>Maximum Inlet Pressure</b>         | <b>85</b> 210 Bar (3000 PSI)<br><b>86</b> 350 Bar (5000 PSI)                                               |
| <b>Leakage at 150 SSU (32 cSt)</b>    | 5 drops/min. (.33 cc/min.)                                                                                 |
| <b>Minimum Operating Voltage</b>      | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                  | <b>Open</b> 40 ms<br><b>Close</b> 40 ms                                                                    |
| <b>Cartridge Material</b>             | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>    | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/ Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                     | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| <b>Approx. Weight</b>                 | .14 kg (.31 lbs.)                                                                                          |
| <b>Cavity</b>                         | C08-2<br>(See BC Section for more details)                                                                 |

## Performance Curve

Pressure Drop vs. Flow (Through cartridge only)

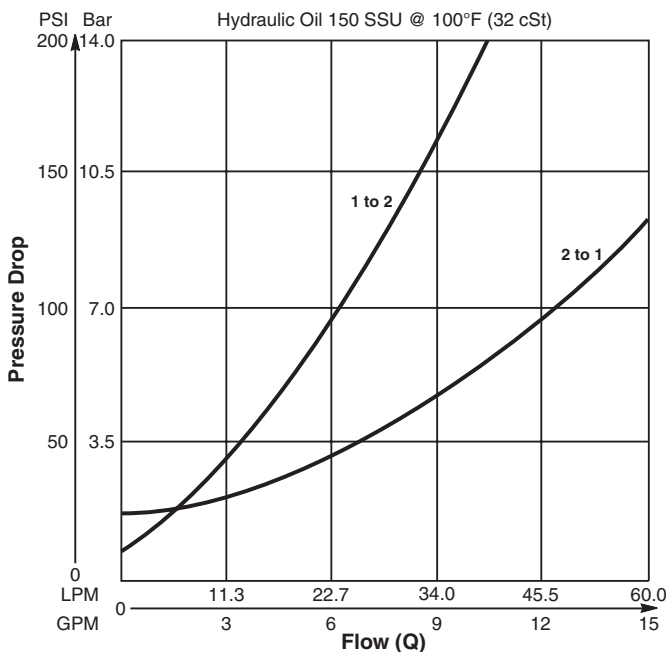

**Dimensions** Millimeters (Inches)

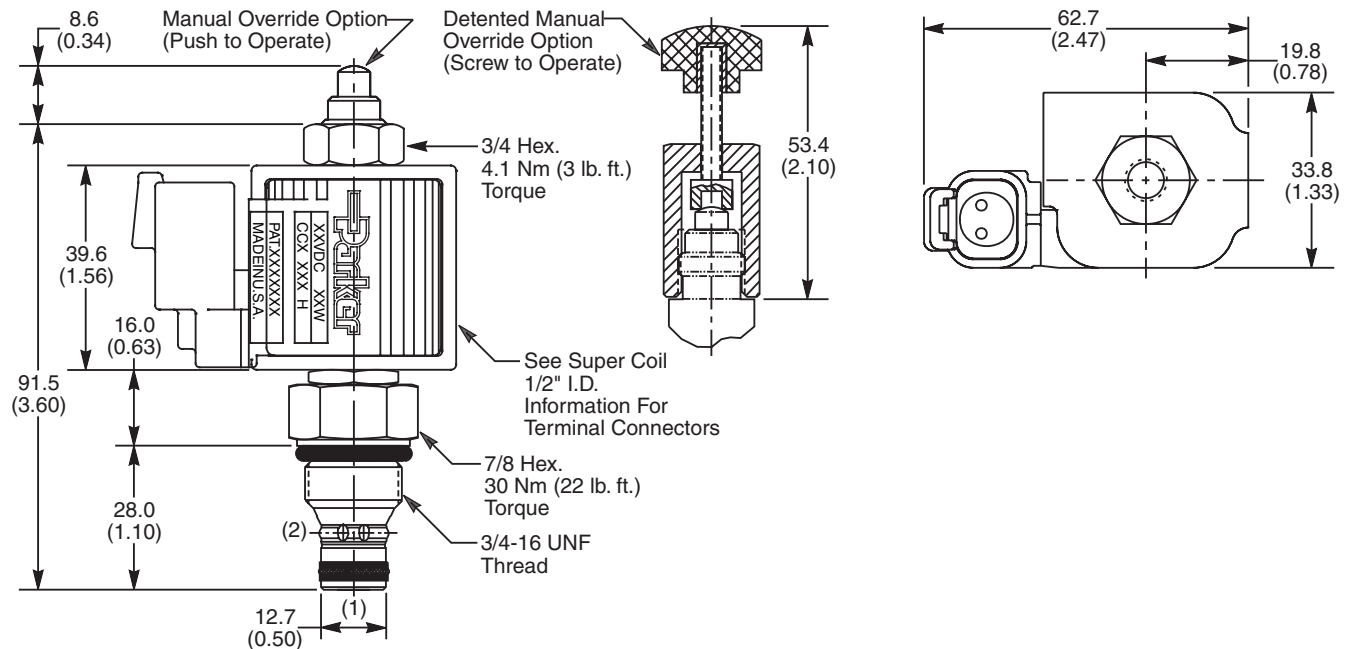

**Ordering Information**

|                               |                            |                        |               |              |                  |                     |                         |                      |                  |
|-------------------------------|----------------------------|------------------------|---------------|--------------|------------------|---------------------|-------------------------|----------------------|------------------|
| <b>GS02</b>                   |                            |                        |               |              |                  |                     |                         |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style Normally Open</b> | <b>Override Option</b> | <b>Screen</b> | <b>Seals</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code      | Style                     |
|-----------|---------------------------|
| <b>85</b> | Standard ('SS' Coil)      |
| <b>86</b> | High Pressure ('SP' Coil) |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30088N-1) |

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code     | Override Options         |
|----------|--------------------------|
| <b>0</b> | None                     |
| <b>1</b> | Manual Override          |
| <b>2</b> | Detented Part No. 900690 |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SS</b>   | Super Coil - 14 Watts |
| <b>SP</b>   | Super Coil - 19 Watts |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>6T</b>   | SAE-6          | (B08-2-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

| Code     | Screen |
|----------|--------|
| <b>0</b> | None   |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

See Super Coil 1/2" I.D.  
 \*DC Only

## Technical Information

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

2-Way, 2 Position, Normally Open, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 02 and 06 series poppet valves; Symmetrical coil can be reversed without affecting performance.

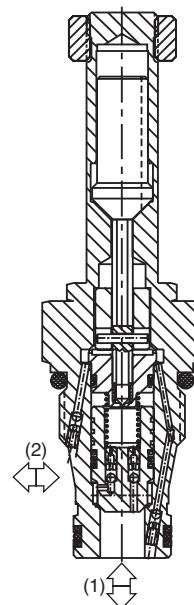


## Specifications


|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | <b>2 to 1</b> 68 LPM (18 GPM)<br><b>1 to 2</b> 46 LPM (12 GPM)                                             |
| <b>Maximum Inlet Pressure</b>        | <b>85</b> 210 Bar (3000 PSI)<br><b>86</b> 350 Bar (5000 PSI)                                               |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 5 drops/min. (.33 cc/min.)                                                                                 |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                 | See Performance Curves                                                                                     |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | .17 kg (.37 lbs.)                                                                                          |
| <b>Cavity</b>                        | 2R<br>(See BC Section for more details)                                                                    |

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

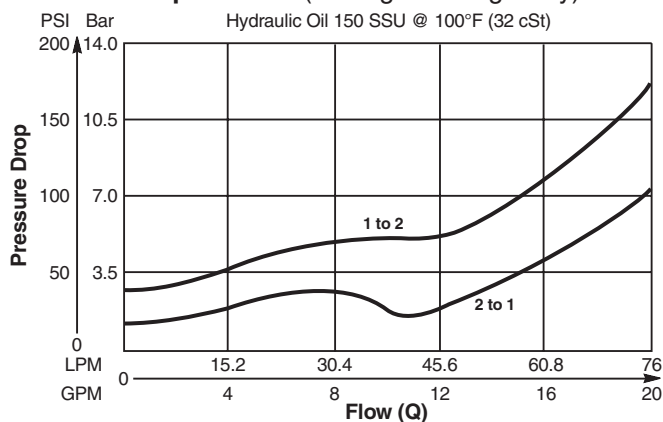

## Response Time vs. Flow

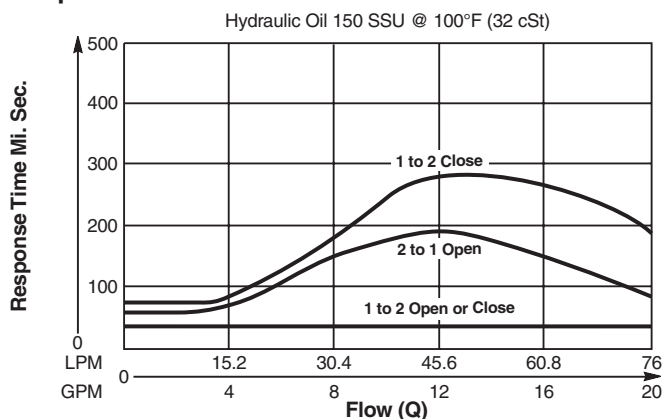

**Dimensions**    Millimeters (Inches)

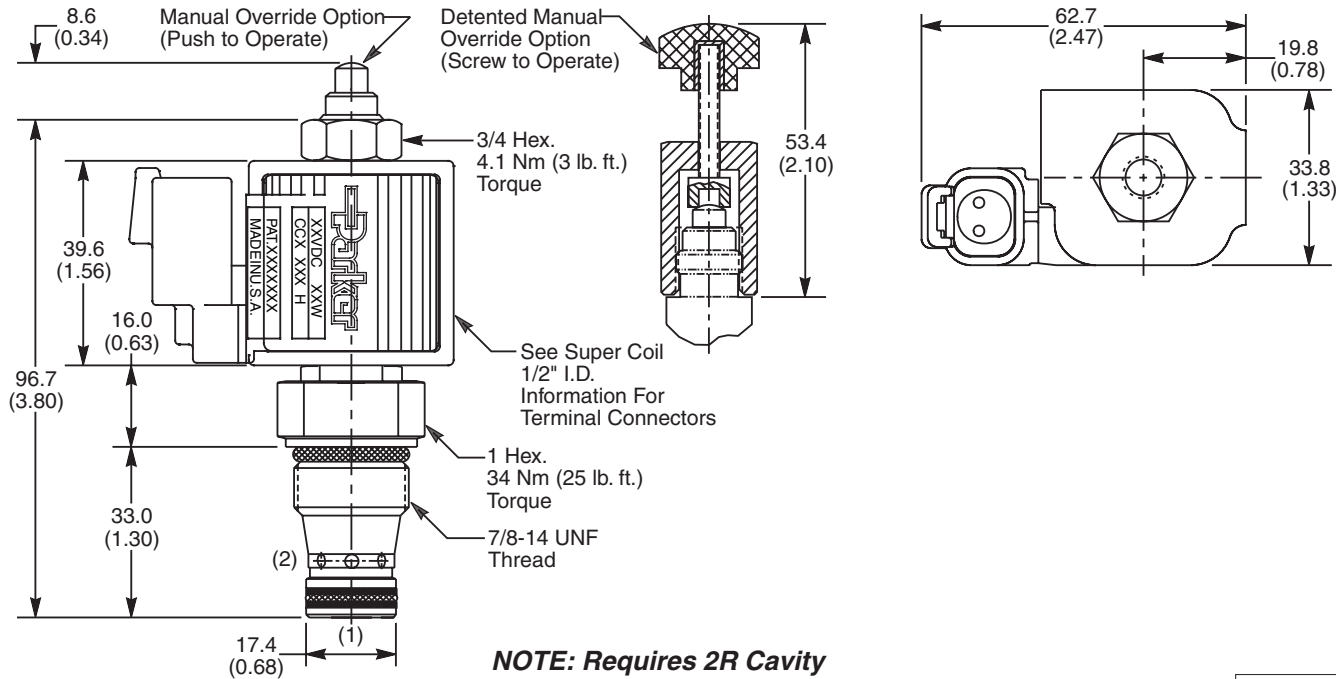

**Ordering Information**

|                        |                     |                 |        |       |           |              |                  |
|------------------------|---------------------|-----------------|--------|-------|-----------|--------------|------------------|
| <b>GS04</b>            |                     |                 |        |       |           |              |                  |
| 10 Size Solenoid Valve | Style Normally Open | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination |

| Code | Style                     |
|------|---------------------------|
| 85   | Standard ('SS' Coil)      |
| 86   | High Pressure ('SP' Coil) |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30113N-1) |

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Override Options         |
|------|--------------------------|
| 0    | None                     |
| 1    | Manual Override          |
| 2    | Detented Part No. 900690 |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SS   | Super Coil - 14 Watts |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Screen |
|------|--------|
| 0    | None   |

**Order Bodies Separately**

|             |         |               |
|-------------|---------|---------------|
| <b>LB10</b> |         |               |
| Line Body   | Porting | Body Material |

| Code | Porting  |
|------|----------|
| 543  | 1/2" SAE |
| 545  | 1/2" BSP |

| Code | Body Material |
|------|---------------|
| A    | Aluminum      |
| S    | Steel         |

**CV**

Check Valves

**SH**

Shuttle Valves

**LM**

Load/Motor Controls

**FC**

Flow Controls

**PC**

Pressure Controls

**LE**

Logic Elements

**DC**

Directional Controls

**MV**

Manual Valves

**SV**

Solenoid Valves

**PV**

Proportional Valves

**CE**

Coils & Electronics

**BC**

Bodies & Cavities

**TD**

Technical Data

## Technical Information

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

2-Way, 2 Position, Normally Open, Bi-Directional Poppet Valve. For additional information see Technical Tips on pages SV1-SV6.

## Features

- Built-in thermal relief set at 36 Bar (500 PSI) above rated pressure
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Coil is interchangeable with 02 and 04 series poppet valves; Symmetrical coil can be reversed without affecting performance.

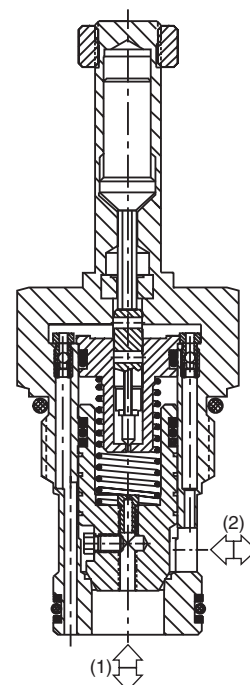


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 190 LPM (50 GPM)                                                                                             |
| <b>Maximum Inlet Pressure</b>                 | <b>85</b> 210 Bar (3000 PSI)<br><b>86</b> 350 Bar (5000 PSI)                                                 |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 5 drops/min. (.33 cc/min.)                                                                                   |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | See Performance Curves                                                                                       |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | 0.4 kg (.88 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C16-2<br>(See BC Section for more details)                                                                   |

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

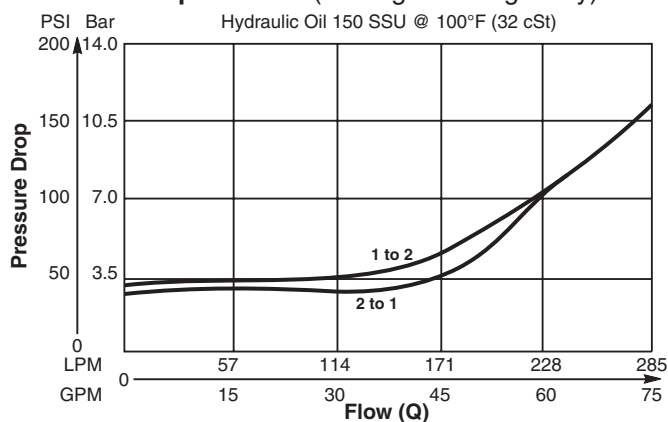

## Response Time vs. Flow

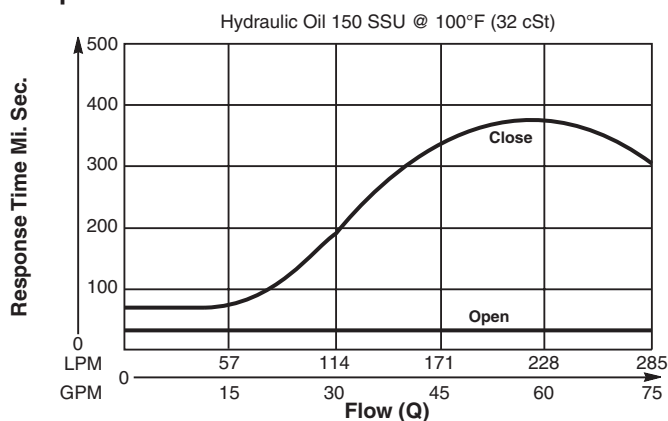

**Dimensions** Millimeters (Inches)

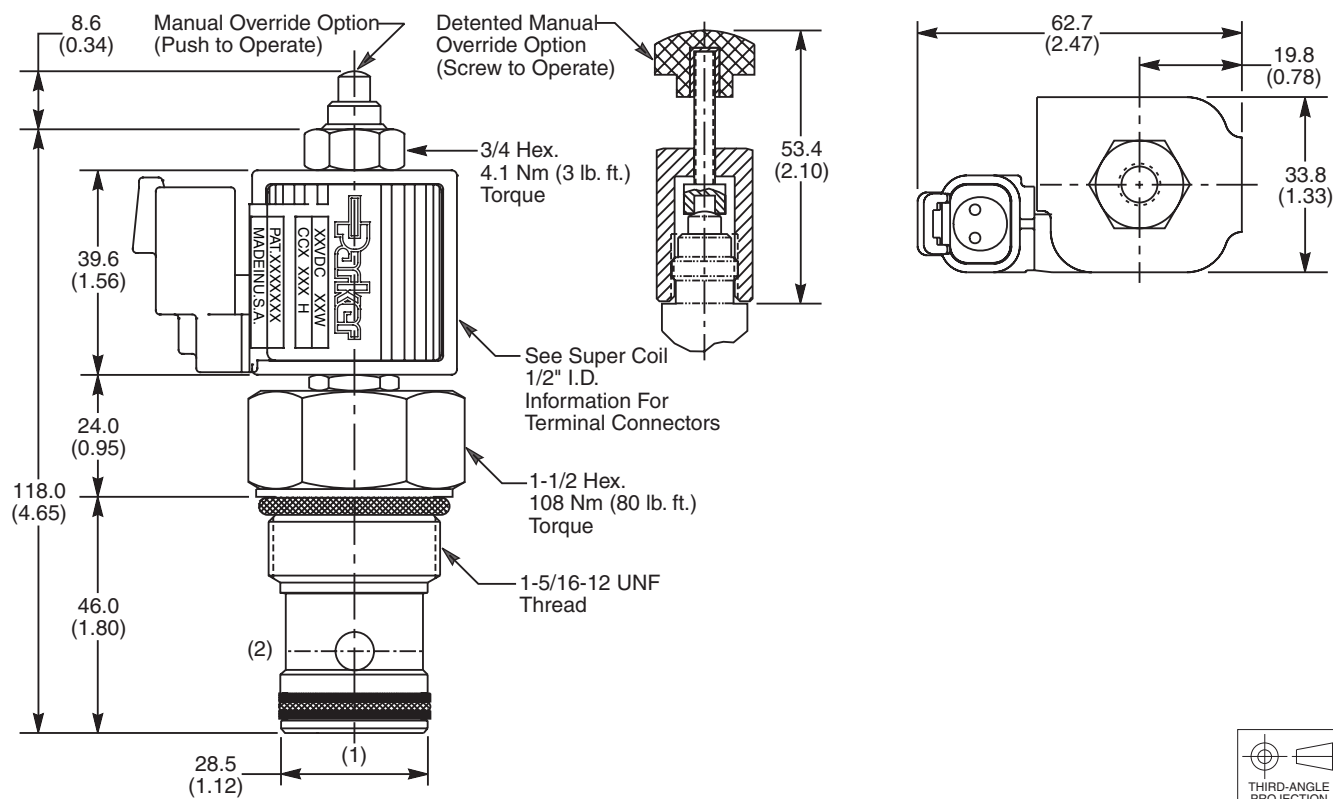

**Ordering Information**

|                        |                     |                 |        |       |           |              |                  |               |           |
|------------------------|---------------------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS06</b>            |                     |                 |        |       |           |              |                  |               |           |
| 16 Size Solenoid Valve | Style Normally Open | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                     |
|------|---------------------------|
| 85   | Standard ('SS' Coil)      |
| 86   | High Pressure ('SP' Coil) |

| Code | Override Options         |
|------|--------------------------|
| 0    | None                     |
| 1    | Manual Override          |
| 2    | Detented Part No. 900690 |

| Code | Screen |
|------|--------|
| 0    | None   |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30089N-1) |
| V    | Fluorocarbon / (SK30089V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SS   | Super Coil - 14 Watts |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 16T  | SAE-16         | (B16-2-*16T)  |
| 16B  | 1" BSPG        | (B16-2-16B)†  |

\* Add "A" for aluminum, omit for steel.  
 † Steel body only.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated


## Specifications

|                               |                                                                                                        |           |              |
|-------------------------------|--------------------------------------------------------------------------------------------------------|-----------|--------------|
| Rated Flow                    | C - 15 LPM (4 GPM)<br>N - 11 LPM (3 GPM)                                                               |           |              |
| Maximum Inlet Pressure        | 250 Bar (3600 PSI)                                                                                     |           |              |
| Leakage at 150 SSU (32cSt)    | 120 cc/min. (7.5 in <sup>3</sup> /min.) at 250 Bar (3600 PSI)                                          |           |              |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                   |           |              |
| Response Time                 | C                                                                                                      | Energized | De-Energized |
|                               | N                                                                                                      | 40 ms     | 40 ms        |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                   |           |              |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)  |           |              |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt) |           |              |
| Filtration                    | ISO Code 16/13, SAE Class 4 or better                                                                  |           |              |
| Approx. Weight                | .11 kg (.25 lbs.)                                                                                      |           |              |
| Cavity                        | C08-2 (See BC Section for more details)                                                                |           |              |
| Form Tool                     | Rougher                                                                                                | None      |              |
|                               | Finisher                                                                                               | NFT08-2F  |              |

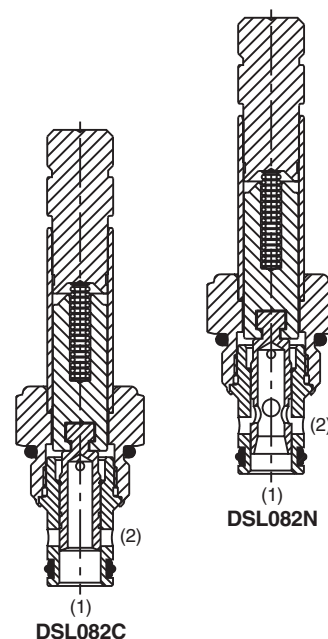


## Performance Curves





## Pressure Drop vs. Flow (Through cartridge only)

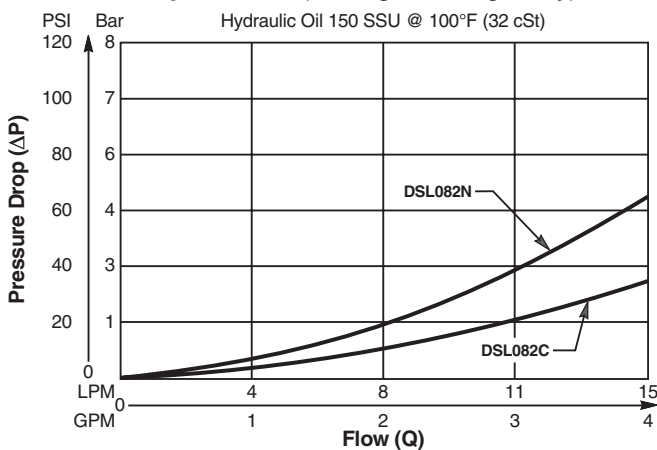


## Shift Limit Characteristics (Min. Operating Voltage)

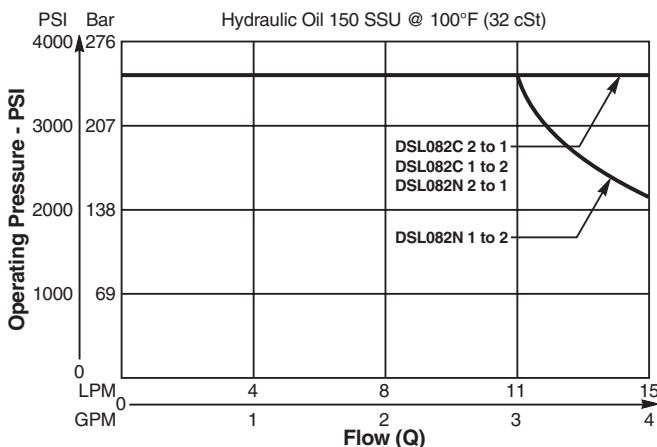

**Dimensions** Millimeters (Inches)

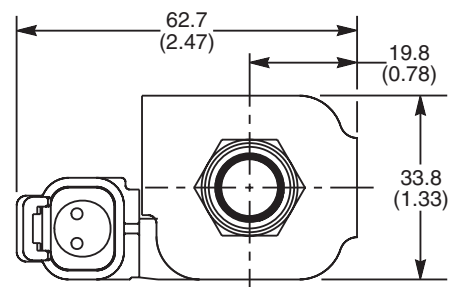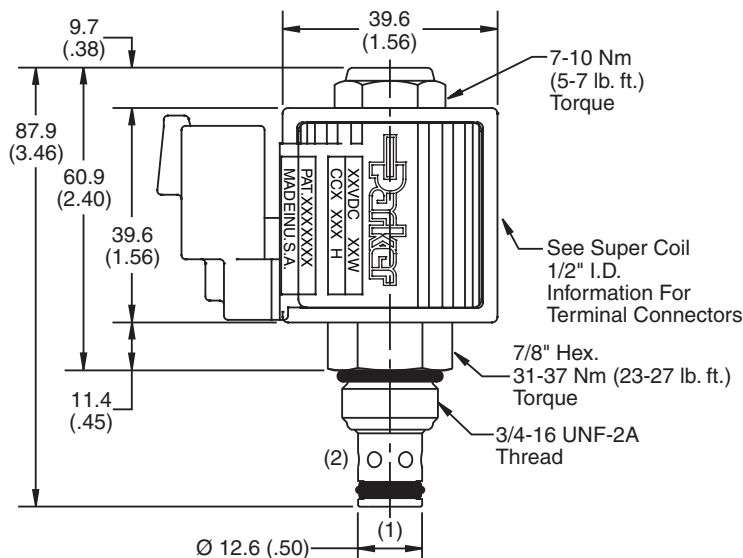

Push and Twist M.O.



Pull and Release M.O.

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSL082</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style             |
|--------------------------|
| <b>C</b> Normally Closed |
| <b>N</b> Normally Open   |

| Code        | Seals / Kit No.          |
|-------------|--------------------------|
| <b>Omit</b> | "D"-Ring / (SK08-2)      |
| <b>N</b>    | Nitrile / (SK08-2N)      |
| <b>V</b>    | Fluorocarbon / (SK08-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 19 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*         | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended  
†DC Only*

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>4P</b>   | 1/4" NPTF      | (B08-2-*4P)   |
| <b>6P</b>   | 3/8" NPTF      | (B08-2-*6P)   |
| <b>4T</b>   | SAE-4          | (B08-2-*4T)   |
| <b>6T</b>   | SAE-6          | (B08-2-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-2-*6B)   |

*\* Add "A" for aluminum, omit for steel.*

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.






## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated


## Specifications

|                                      |                                                                                                        |                  |                     |
|--------------------------------------|--------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow</b>                    | <b>C</b> - 15.0 LPM (4 GPM)<br><b>N</b> - 8.4 LPM (2.8 GPM)                                            |                  |                     |
| <b>Maximum Inlet Pressure</b>        | 350 Bar (5000 PSI)                                                                                     |                  |                     |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min. (10 in <sup>3</sup> /min.) at 350 Bar (5000 PSI)                                           |                  |                     |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                   |                  |                     |
| <b>Response Time</b>                 | <b>C</b>                                                                                               | <b>Energized</b> | <b>De-Energized</b> |
|                                      | <b>N</b>                                                                                               | 40 ms            | 40 ms               |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                   |                  |                     |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)  |                  |                     |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt) |                  |                     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                  |                  |                     |
| <b>Approx. Weight</b>                | .11 kg (.25 lbs.)                                                                                      |                  |                     |
| <b>Cavity</b>                        | C08-2 (See BC Section for more details)                                                                |                  |                     |
| <b>Form Tool</b>                     | <b>Rougher</b>                                                                                         | <b>None</b>      |                     |
|                                      | <b>Finisher</b>                                                                                        | <b>NFT08-2F</b>  |                     |

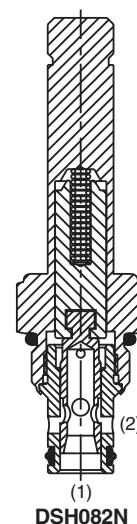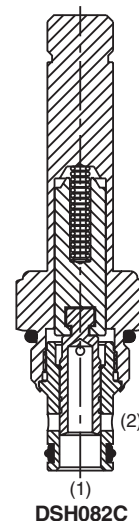


## Performance Curves




### Pressure Drop vs. Flow (Through cartridge only)

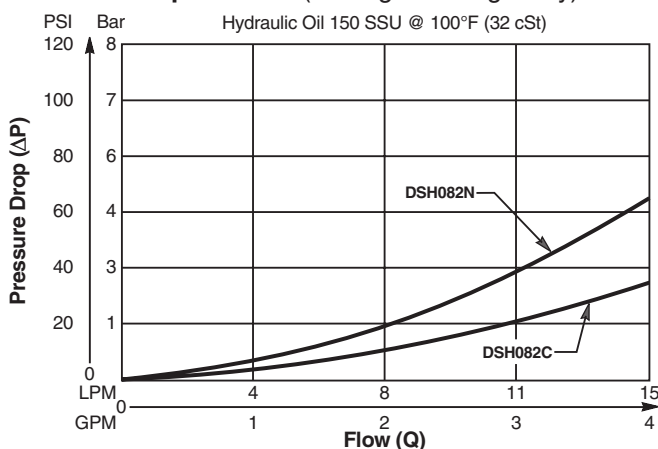

### Shift Limit Characteristics (Min. Operating Voltage)

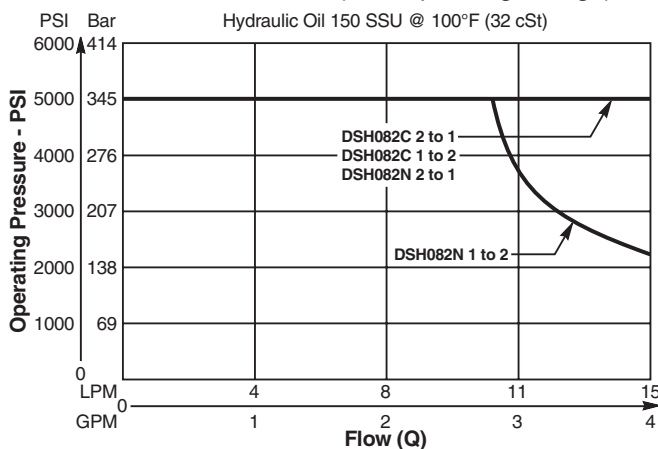

**Dimensions** Millimeters (Inches)

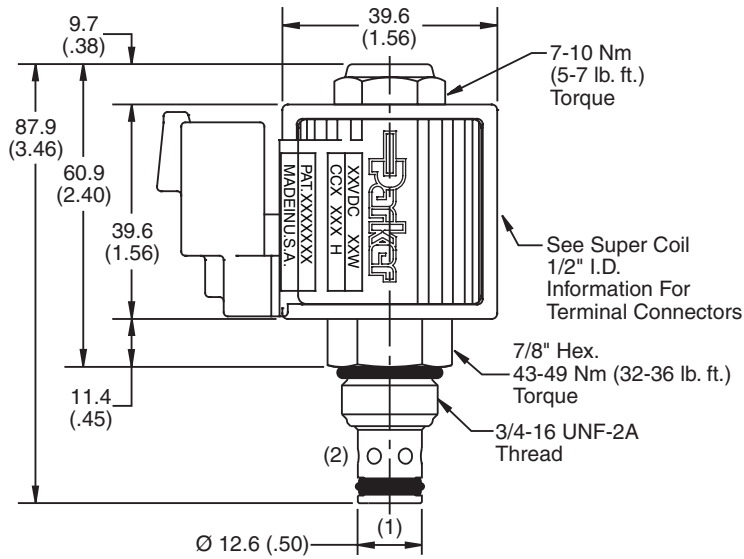

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSH082</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>08 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style             |
|--------------------------|
| <b>C</b> Normally Closed |
| <b>N</b> Normally Open   |

| Code        | Seals / Kit. No.         |
|-------------|--------------------------|
| <b>Omit</b> | "D"-Ring / (SK08-2)      |
| <b>N</b>    | Nitrile / (SK08-2N)      |
| <b>V</b>    | Fluorocarbon / (SK08-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 19 Watts |

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*         | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>4P</b>   | 1/4" NPTF      | (B08-2-*4P)   |
| <b>6P</b>   | 3/8" NPTF      | (B08-2-*6P)   |
| <b>4T</b>   | SAE-4          | (B08-2-*4T)   |
| <b>6T</b>   | SAE-6          | (B08-2-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-2-*6B)   |

\* Add "A" for aluminum, omit for steel.

| Code        | Override Options            |
|-------------|-----------------------------|
| <b>Omit</b> | None                        |
| <b>T</b>    | Push & Twist* (N.C. & N.O.) |

\*Requires Super Coil

\*Recommended

\*Recommended  
†DC Only

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring
- All external parts zinc plated


## Specifications

|                                      |                                                                                                        |                  |                     |
|--------------------------------------|--------------------------------------------------------------------------------------------------------|------------------|---------------------|
| <b>Rated Flow</b>                    | <b>C</b> - 30 LPM (8.0 GPM)<br><b>N</b> - 21 LPM (5.5 GPM)                                             |                  |                     |
| <b>Maximum Inlet Pressure</b>        | 250 Bar (3600 PSI)                                                                                     |                  |                     |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 120 cc/min. (7.5 in <sup>3</sup> /min.)                                                                |                  |                     |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                   |                  |                     |
| <b>Response Time</b>                 | <b>C</b>                                                                                               | <b>Energized</b> | <b>De-Energized</b> |
|                                      | <b>N</b>                                                                                               | 30 ms<br>50 ms   | 20 ms<br>25 ms      |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                   |                  |                     |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)  |                  |                     |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt) |                  |                     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                  |                  |                     |
| <b>Approx. Weight</b>                | .18 kg (.41 lbs.)                                                                                      |                  |                     |
| <b>Cavity</b>                        | C10-2 (See BC Section for more details)                                                                |                  |                     |
| <b>Form Tool</b>                     | <b>Rougher</b>                                                                                         | <b>None</b>      |                     |
|                                      | <b>Finisher</b>                                                                                        | <b>NFT10-2F</b>  |                     |

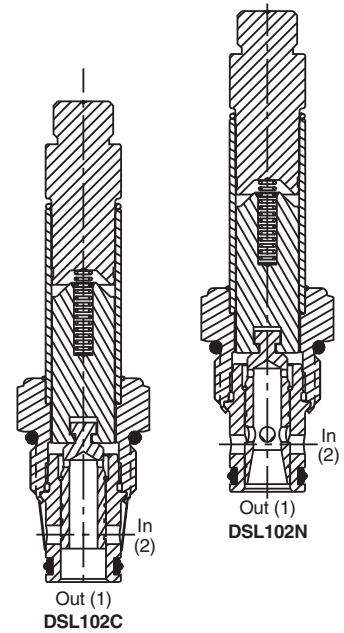


## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

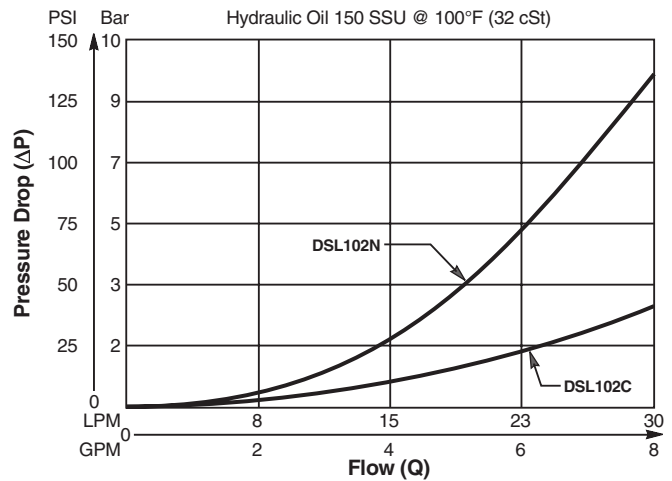

### Shift Limit Characteristics (Min. Operating Voltage)

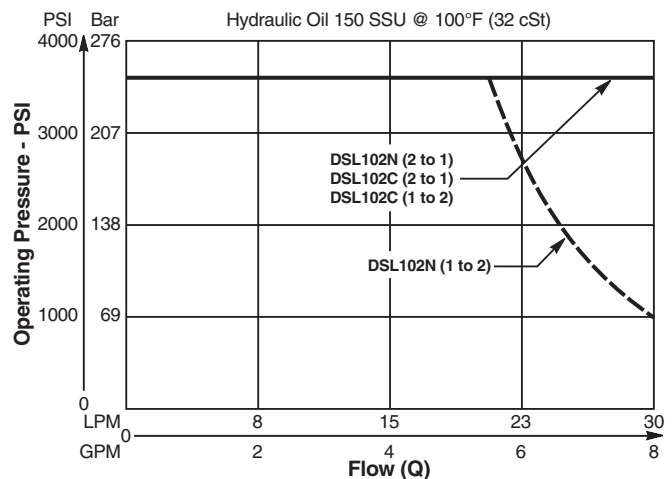

Millimeters (Inches)

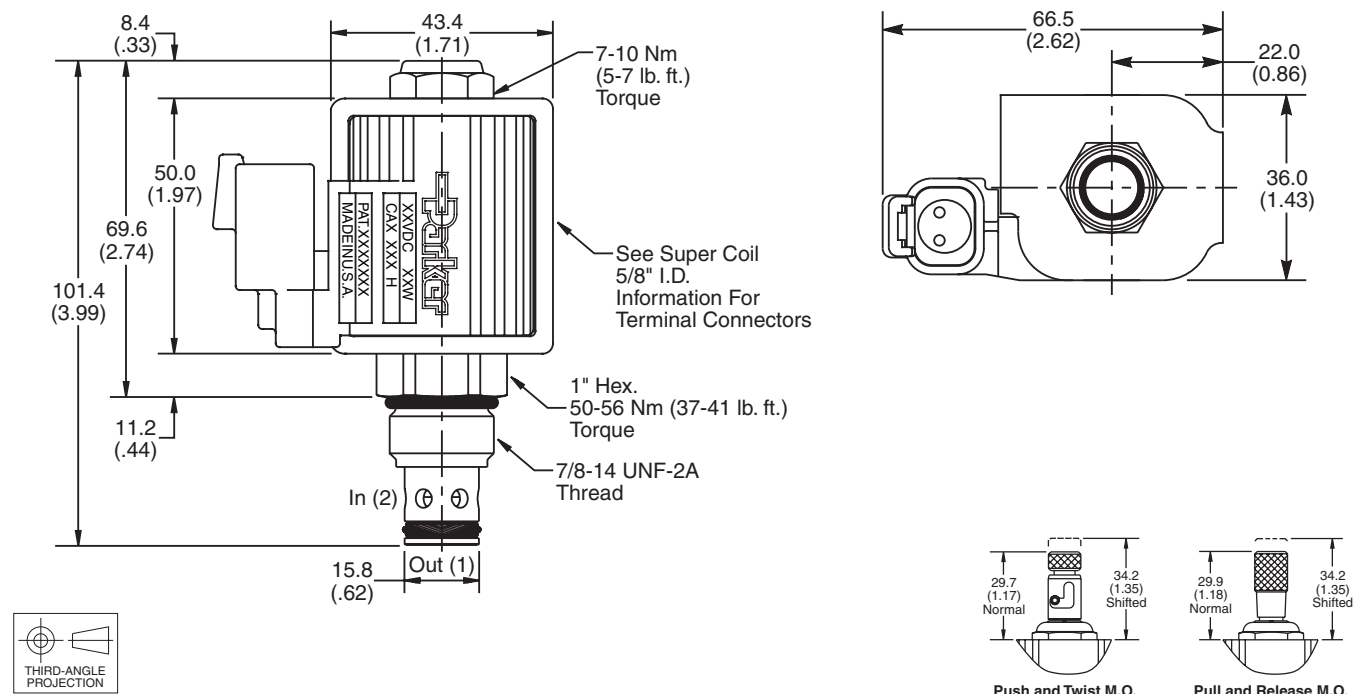

\* Add "A" for aluminum. omit for steel.  
† Steel body only.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

2-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.





## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated


## Specifications

|                               |                                                                                                             |                |                |
|-------------------------------|-------------------------------------------------------------------------------------------------------------|----------------|----------------|
| Rated Flow                    | C - 30 LPM (8.0 GPM)<br>N - 19 LPM (5.0 GPM)                                                                |                |                |
| Maximum Inlet Pressure        | 350 Bar (5000 PSI)                                                                                          |                |                |
| Leakage at 150 SSU (32 cSt)   | 160 cc/min. (10 in <sup>3</sup> /min.)                                                                      |                |                |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                        |                |                |
| Response Time                 | C                                                                                                           | Energized      | De-Energized   |
|                               | N                                                                                                           | 30 ms<br>50 ms | 20 ms<br>25 ms |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                        |                |                |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |                |                |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |                |                |
| Filtration                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |                |                |
| Approx. Weight                | .18 kg (.40 lbs.)                                                                                           |                |                |
| Cavity                        | C10-2<br>(See BC Section for more details)                                                                  |                |                |
| Form Tool                     | Rougher                                                                                                     | None           |                |
|                               | Finisher                                                                                                    | NFT10-2F       |                |

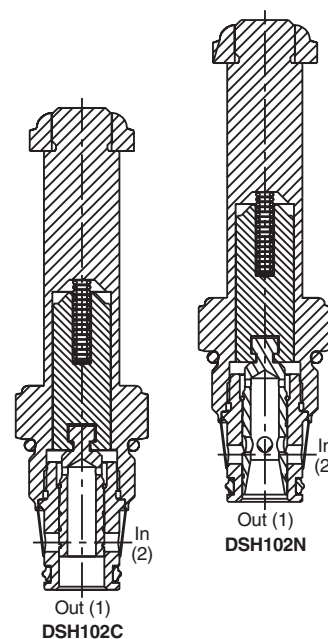


## Performance Curves


Pressure Drop vs. Flow (Through cartridge only)

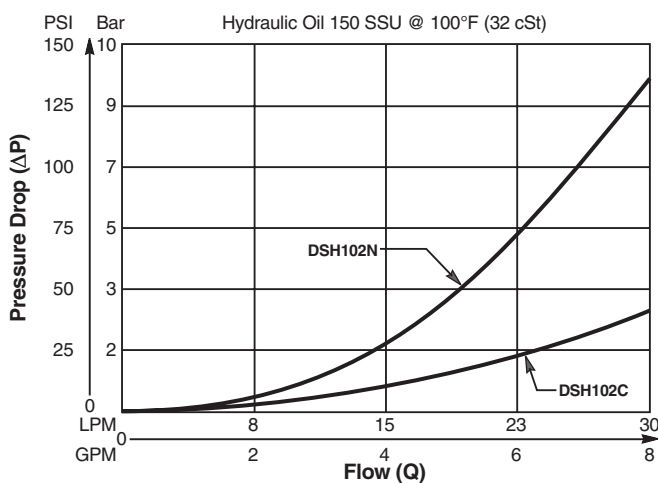

## Shift Limit Characteristics (Min. Operating Voltage)

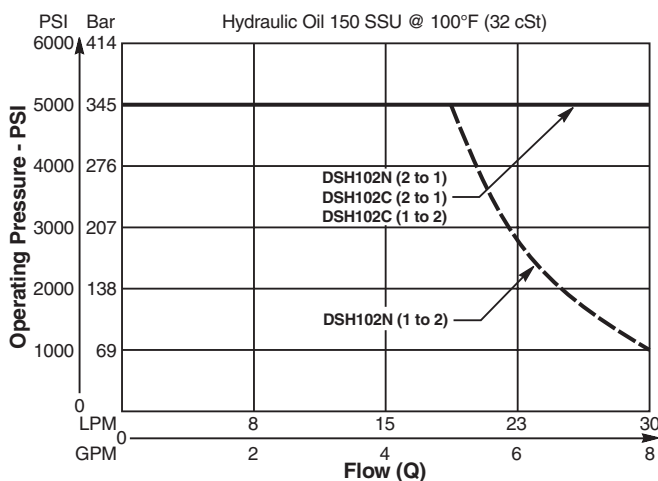

**Dimensions** Millimeters (Inches)

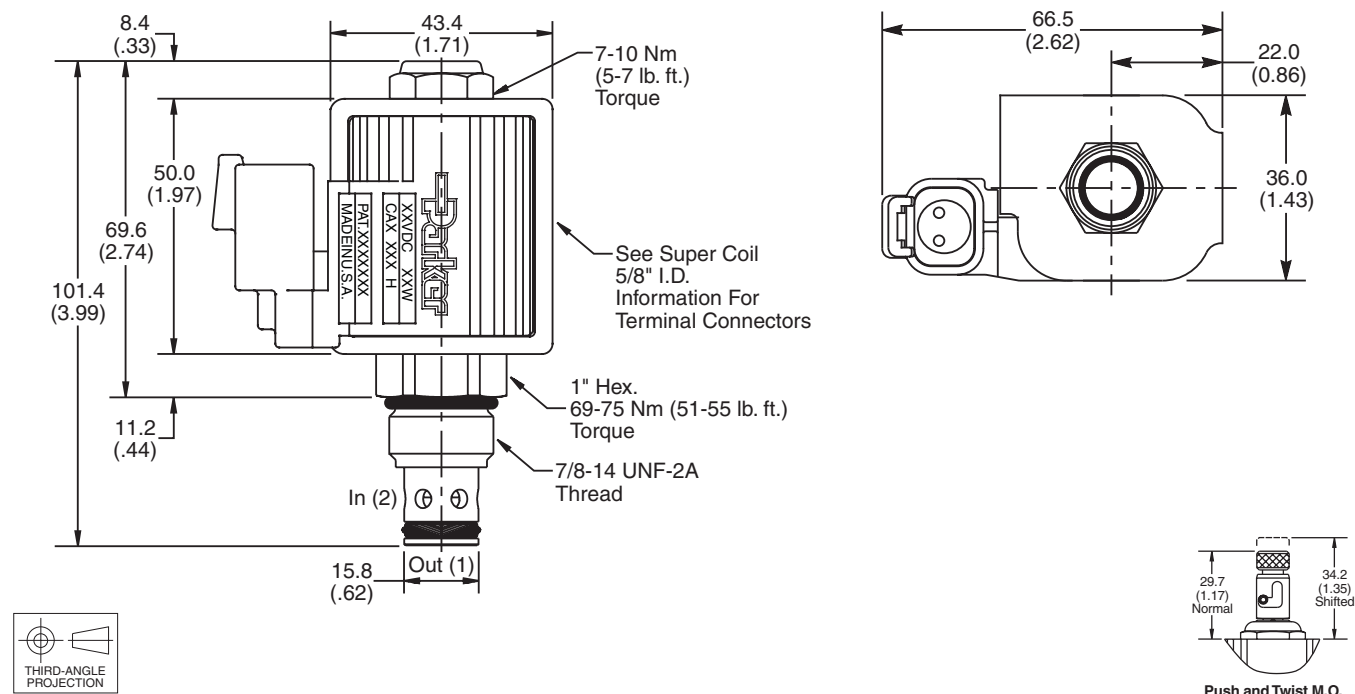

**Ordering Information**

|                               |              |                        |              |               |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|---------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSH102</b>                 |              |                        |              |               |                  |                     |                         |              |                      |                  |
| <b>10 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Screen</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code / Style                |
|-----------------------------|
| <b>C</b><br>Normally Closed |
| <b>N</b><br>Normally Open   |

| Code        | Seals / Kit No.          |
|-------------|--------------------------|
| <b>Omit</b> | "D"-Ring / (SK10-2)      |
| <b>N</b>    | Nitrile / (SK10-2N)      |
| <b>V</b>    | Fluorocarbon / (SK10-2V) |

| Code        | Screen |
|-------------|--------|
| <b>Omit</b> | None   |
| <b>S</b>    | Screen |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP*</b>  | Super Coil - 28 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*         | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

*\*Recommended  
†DC Only*

| Code        | Diode |
|-------------|-------|
| <b>Omit</b> | None  |
| <b>R</b>    | Diode |

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>4P</b>   | 1/4" NPTF      | (B10-2-*4P)   |
| <b>6P</b>   | 3/8" NPTF      | (B10-2-*6P)   |
| <b>8P</b>   | 1/2" NPTF      | (B10-2-*8P)   |
| <b>6T</b>   | SAE-6          | (B10-2-*6T)   |
| <b>8T</b>   | SAE-8          | (B10-2-*8T)   |
| <b>T8T</b>  | SAE-8          | (B10-2-T8T)†  |
| <b>6B</b>   | 3/8" BSPG      | (B10-2-6B)†   |

*\* Add "A" for aluminum. omit for steel.  
† Steel body only.*

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description




2-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features


- Low hysteresis
- One-piece encapsulated coil with minimal amperage draw
- Variety of coil terminations and voltages
- Manual override standard (push and release)
- All external parts zinc plated

## Specifications

|                               |                                                                                                            |
|-------------------------------|------------------------------------------------------------------------------------------------------------|
| Rated Flow                    | 75 LPM (20 GPM)                                                                                            |
| Maximum Inlet Pressure        | 210 Bar (3000 PSI)                                                                                         |
| Leakage at 150 SSU (32 cSt)   | 240 cc/min. (15 in <sup>3</sup> /min.)                                                                     |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                       |
| Response Time                 | C - 90 ms<br>N - 100 ms                                                                                    |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                       |
| Operating Temp. Range/Seals   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| Filtration                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| Approx. Weight                | .59 kg (1.3 lbs.)                                                                                          |
| Cavity                        | C16-2<br>(See BC Section for more details)                                                                 |
| Form Tool                     | Rougher None<br>Finisher NFT16-2F                                                                          |

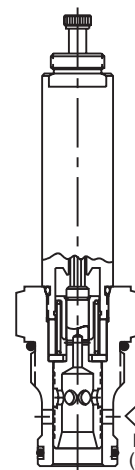



DS162C

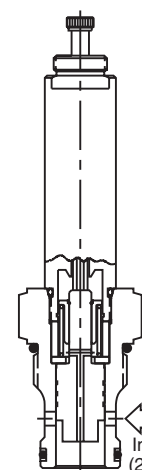



DS162N

## Performance Curves

Pressure Drop vs. Flow (Through cartridge only)

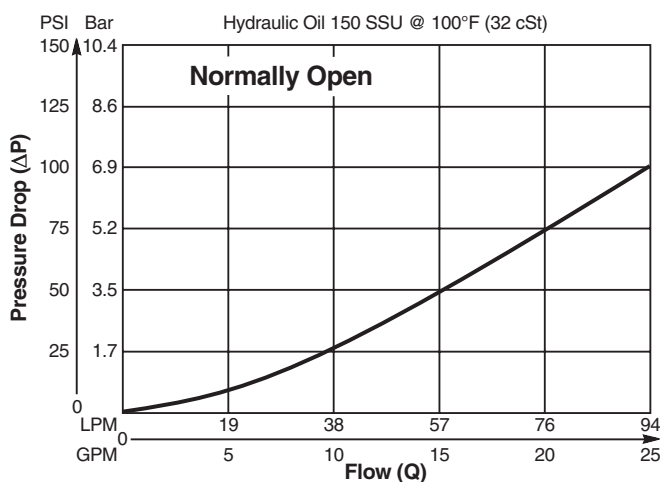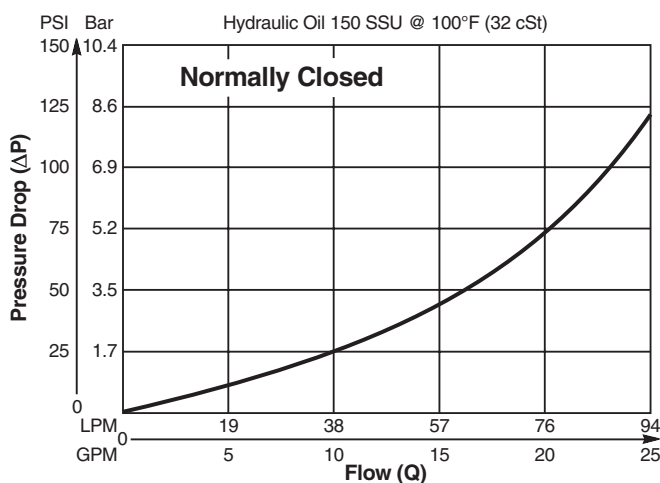

**Dimensions** Millimeters (Inches)

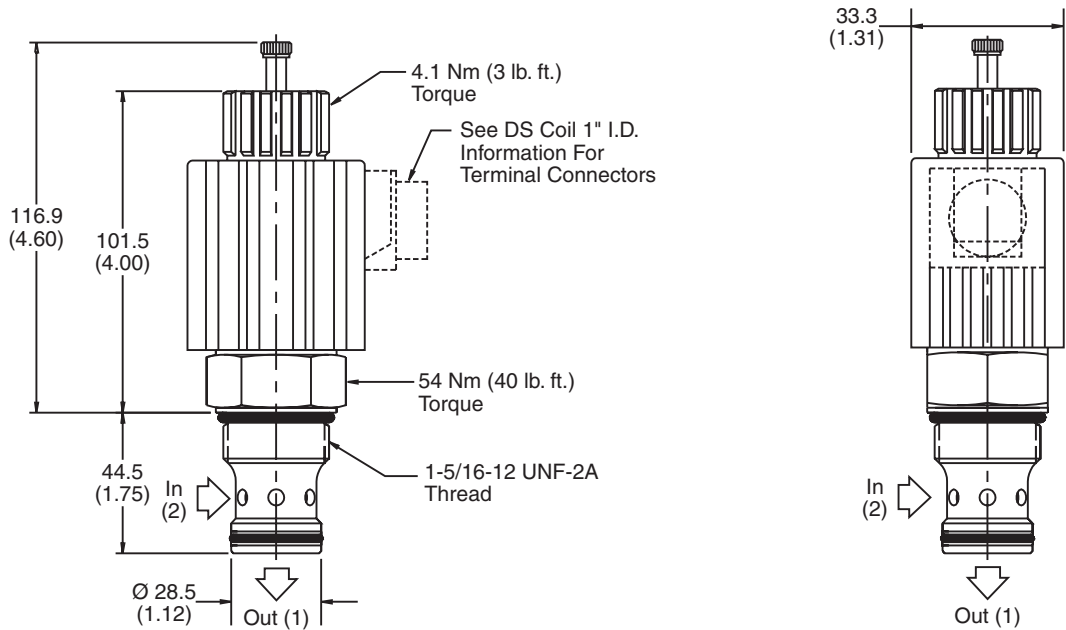

**Ordering Information**

|                        |       |       |              |                  |               |           |
|------------------------|-------|-------|--------------|------------------|---------------|-----------|
| <b>DS162</b>           |       |       |              |                  |               |           |
| 16 Size Solenoid Valve | Style | Seals | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code / Style                |
|-----------------------------|
| <b>C</b><br>Normally Closed |
| <b>N</b><br>Normally Open   |

| Code        | Seals / Kit No.          |
|-------------|--------------------------|
| <b>Omit</b> | Nitrile / (SK16-2)       |
| <b>V</b>    | Fluorocarbon / (SK16-2V) |

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |

| Code        | Coil Termination     |
|-------------|----------------------|
| <b>Omit</b> | Without Coil         |
| <b>C</b>    | Conduit (AC Only)    |
| <b>D</b>    | DIN Plug Face        |
| <b>P</b>    | Dual Spade (DC Only) |
| <b>S</b>    | Dual Screw (DC Only) |
| <b>W</b>    | Dual Lead (DC Only)  |

See DS coil 1" I.D.

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>12T</b>  | SAE-12         | (B16-2-*12T)  |
| <b>16T</b>  | SAE-16         | (B16-2-*16T)  |
| <b>12B</b>  | 3/4" BSPG      | (B16-2-*12B)  |
| <b>16B</b>  | 1" BSPG        | (B16-2-16B)†  |

\* Add "A" for aluminum, omit for steel.  
† Steel body only.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

3-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.




## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One piece encapsulated coils with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated


## Specifications

|                               |                                                                                                                                                                       |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Flow                    | <b>DSL083A</b>                                                                                                                                                        |
|                               | N.O. 13.2 LPM (3.5 GPM)                                                                                                                                               |
|                               | N.C. 8.4 LPM (2.25 GPM)                                                                                                                                               |
|                               | Selector 8.4 LPM (2.25 GPM)                                                                                                                                           |
|                               | <b>DSL083B</b>                                                                                                                                                        |
|                               | N.C. 15.0 LPM (4.0 GPM)                                                                                                                                               |
|                               | Selector 15.0 LPM (4.0 GPM)                                                                                                                                           |
|                               | <b>DSL083C</b>                                                                                                                                                        |
|                               | N.O. 15.0 LPM (4.0 GPM)                                                                                                                                               |
|                               | <b>DSL083N</b>                                                                                                                                                        |
|                               | N.O. 12.3 LPM (3.25 GPM)                                                                                                                                              |
|                               | Selector 15.0 LPM (4.0 GPM)                                                                                                                                           |
| Maximum Inlet Pressure        | 250 Bar (3600 PSI)                                                                                                                                                    |
| Leakage at 150 SSU (32 cSt)   | 120 cc/min. (7.5 in <sup>3</sup> /min.) at 250 Bar (3600 PSI)<br>DSL083B - 180 cc/min. (11 in <sup>3</sup> /min.)<br>DSL083N - 180 cc/min. (11 in <sup>3</sup> /min.) |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                                                                                  |
| Response Time                 | 50 ms                                                                                                                                                                 |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                                                                                  |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)                                                                 |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)                                                                |
| Filtration                    | ISO Code 16/13, SAE Class 4 or better                                                                                                                                 |
| Approx. Weight                | .13 kg (.28 lbs.)                                                                                                                                                     |
| Cavity                        | C08-3 (See BC Section for more details)                                                                                                                               |
| Form Tool                     | Rougher NFT08-3R<br>Finisher NFT08-3F                                                                                                                                 |




## Construction/Symbols


## DSL083A

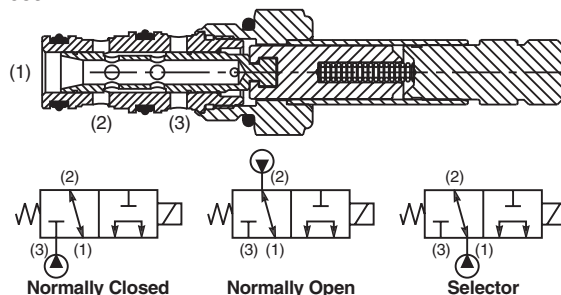


## DSL083B

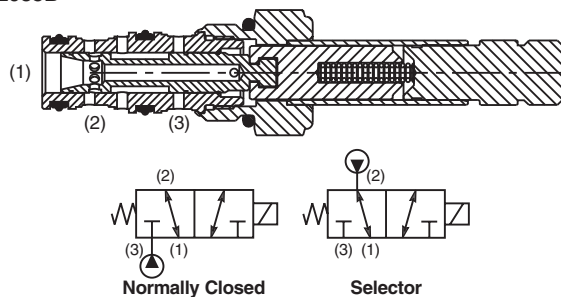


## DSL083C

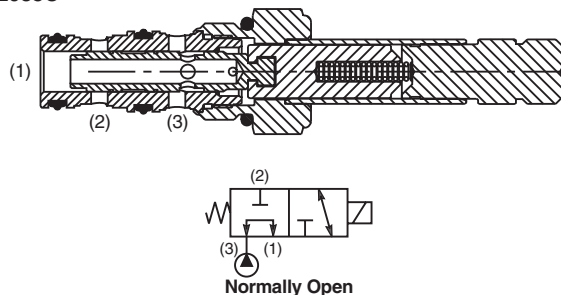

## DSL083N

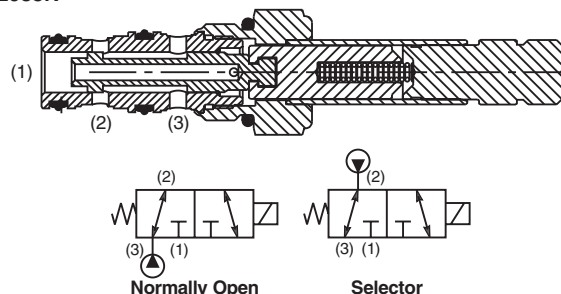

Dimensions    Millimeters (Inches)

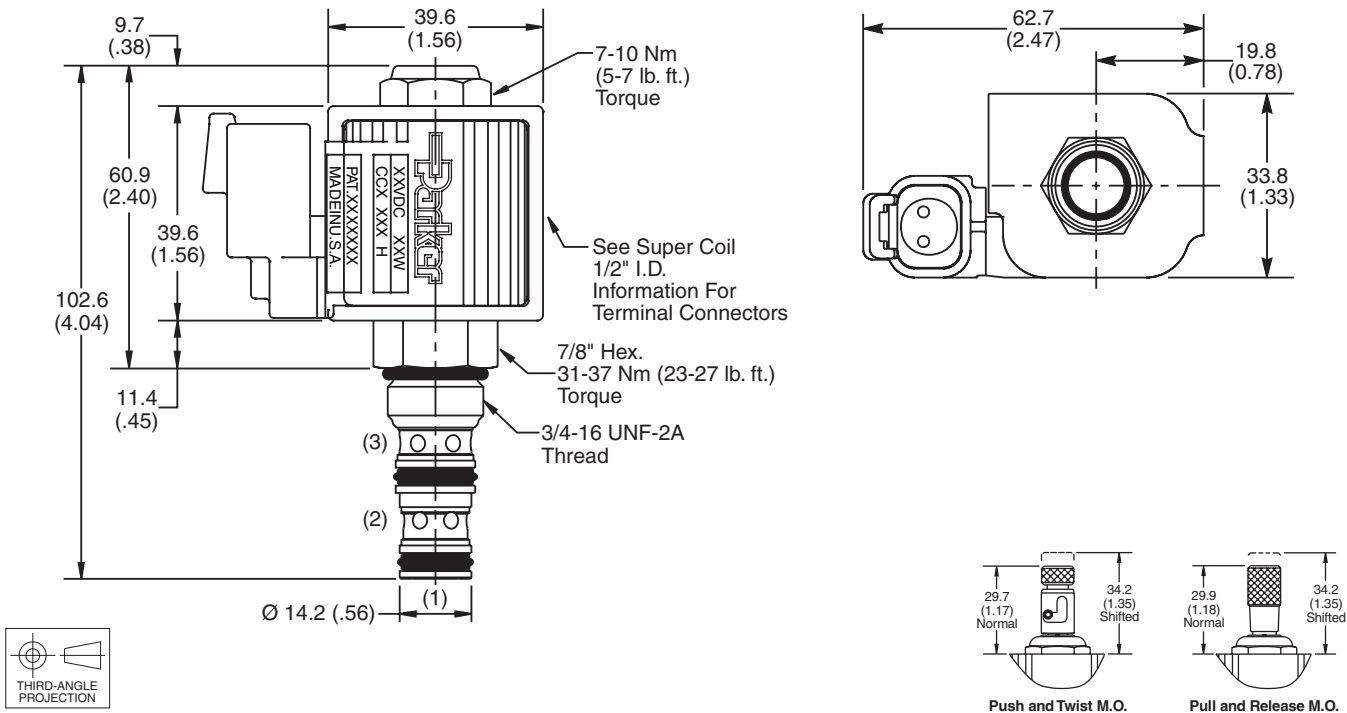

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSL083</b>          |       |                 |       |           |              |                  |       |               |           |
| 08 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| A    |       |
| B    |       |
| C    |       |
| N    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| P    | Pull & Release   |
| T    | Push & Twist     |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK08-3)      |
| N    | Nitrile / (SK08-3N)      |
| V    | Fluorocarbon / (SK08-3V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 19 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4P   | 1/4" NPTF      | (B08-3-*4P)   |
| 4T   | SAE-4          | (B08-3-*4T)   |
| 6T   | SAE-6          | (B08-3-*6T)   |
| 6B   | 3/8" BSPG      | (B08-3-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Performance Curves

Spool Type, 3-Way Valve  
Series DSL083

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics


BC

Bodies &  
Cavities


TD

Technical  
Data


## Pressure Drop vs. Flow (Through cartridge only)

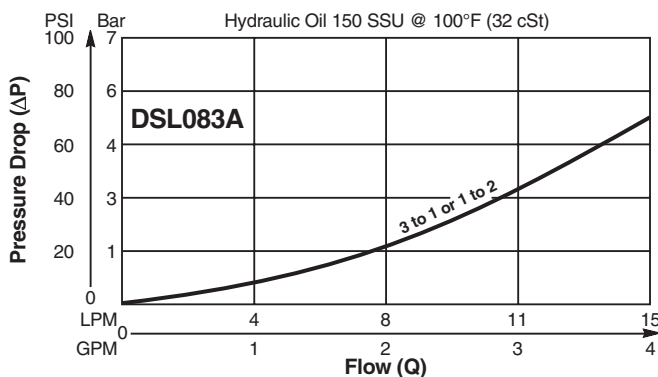


## Shift Limit Characteristics (Min. Operating Voltage)

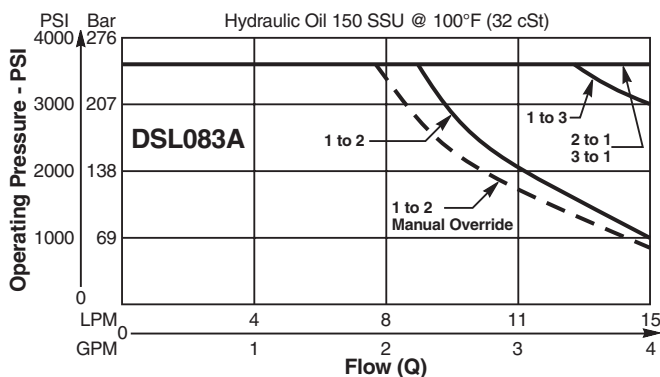


## Pressure Drop vs. Flow (Through cartridge only)

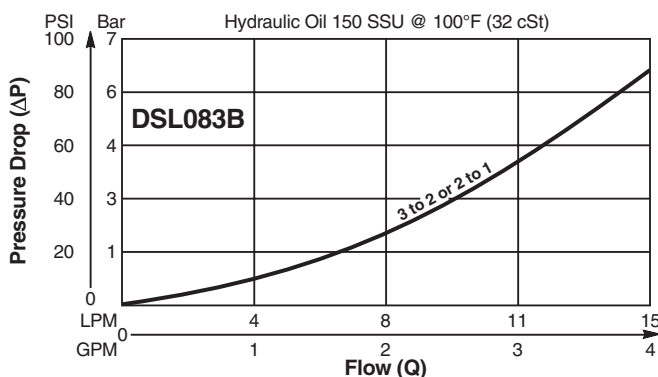


## Shift Limit Characteristics (Min. Operating Voltage)

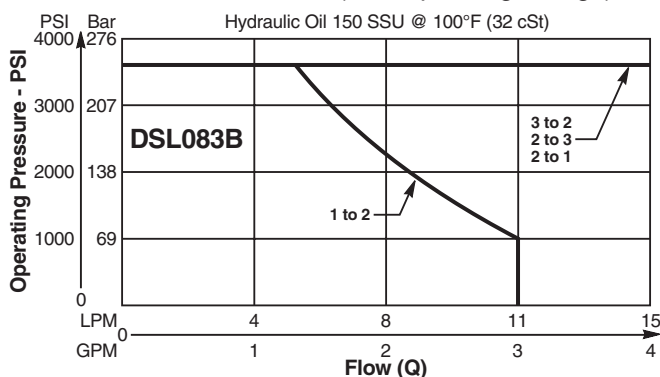


## Pressure Drop vs. Flow (Through cartridge only)

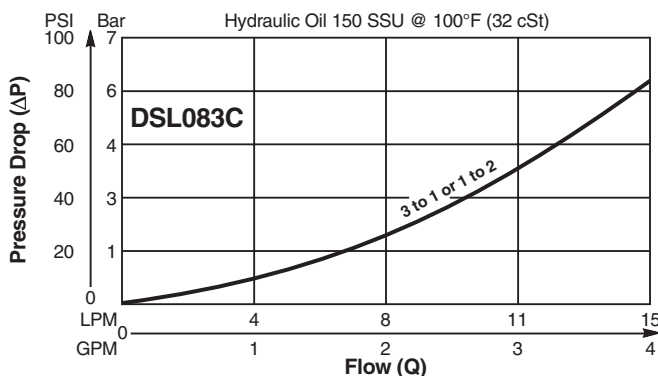


## Shift Limit Characteristics (Min. Operating Voltage)

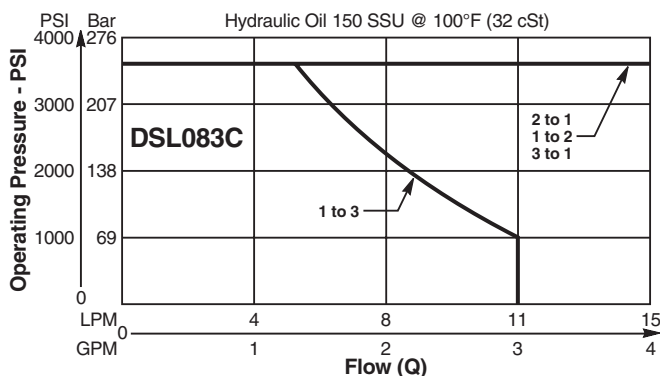

## Pressure Drop vs. Flow (Through cartridge only)

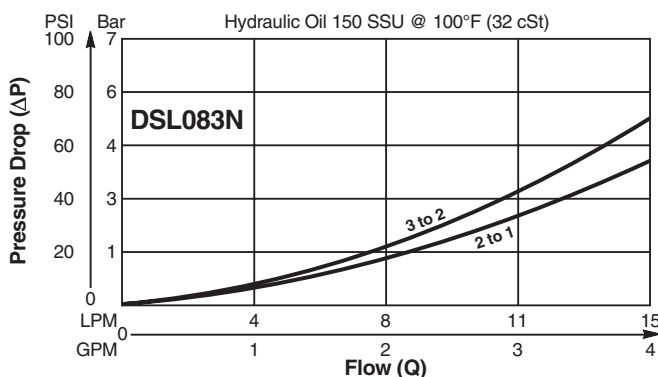

## Shift Limit Characteristics (Min. Operating Voltage)

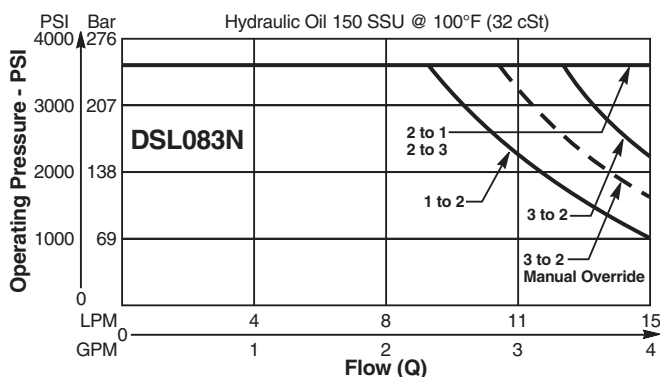

## General Description

3-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.




## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One piece encapsulated coils with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated



## Specifications

|                               |                                                                                                                                                                      |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Flow                    | <b>DSH083A</b>                                                                                                                                                       |
|                               | N.O. 11.3 LPM (3.0 GPM)                                                                                                                                              |
|                               | N.C. 7.5 LPM (2.0 GPM)                                                                                                                                               |
|                               | Selector 7.5 LPM (2.0 GPM)                                                                                                                                           |
|                               | <b>DSH083B</b>                                                                                                                                                       |
|                               | N.C. 15.0 LPM (4.0 GPM)                                                                                                                                              |
| Maximum Inlet Pressure        | Selector 15.0 LPM (4.0 GPM)                                                                                                                                          |
|                               | <b>DSH083C</b>                                                                                                                                                       |
|                               | N.O. 15.0 LPM (4.0 GPM)                                                                                                                                              |
|                               | <b>DSH083N</b>                                                                                                                                                       |
|                               | N.O. 11.3 LPM (3.0 GPM)                                                                                                                                              |
|                               | Selector 15.0 LPM (4.0 GPM)                                                                                                                                          |
| Leakage at 150 SSU (32 cSt)   | 160 cc/min. (10 in <sup>3</sup> /min.) at 350 Bar (5000 PSI)<br>DSH083B - 250 cc/min. (15 in <sup>3</sup> /min.)<br>DSH083N - 250 cc/min. (15 in <sup>3</sup> /min.) |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                                                                                 |
| Response Time                 | 50 ms                                                                                                                                                                |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                                                                                 |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)                                                                |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)                                                               |
| Filtration                    | ISO Code 16/13, SAE Class 4 or better                                                                                                                                |
| Approx. Weight                | .13 kg (.28 lbs.)                                                                                                                                                    |
| Cavity                        | C08-3 (See BC Section for more details)                                                                                                                              |
| Form Tool                     | Rougher NFT08-3R<br>Finisher NFT08-3F                                                                                                                                |





## Construction/Symbols



DSH083A

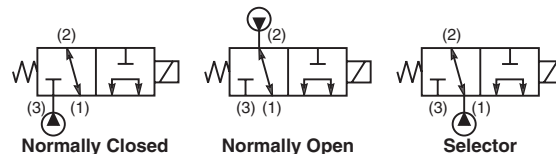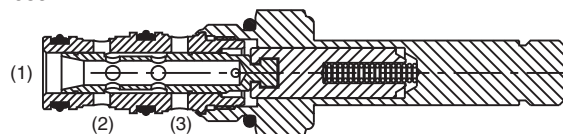



DSH083B

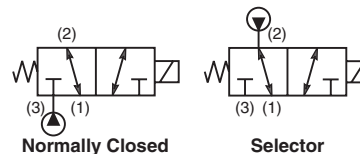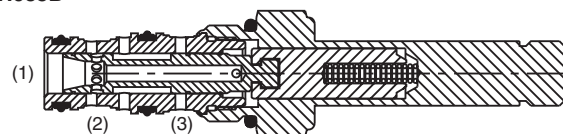

DSH083C

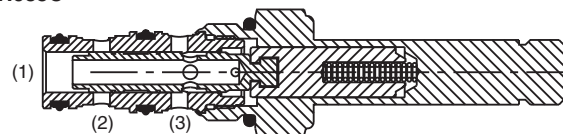

DSH083N

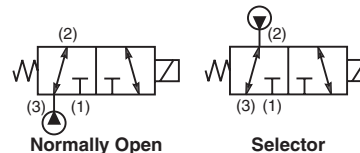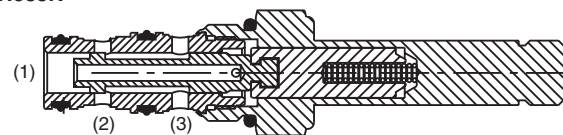

CV

Check Valves

SH

Shuttle Valves

LM

Load/Motor Controls

FC

Flow Controls

PC

Pressure Controls

LE

Logic Elements

DC

Directional Controls

MV

Manual Valves

SV

Solenoid Valves

PV

Proportional Valves

CE

Coils &amp; Electronics



BC

Bodies &amp; Cavities

TD

Technical Data

Dimensions    Millimeters (Inches)

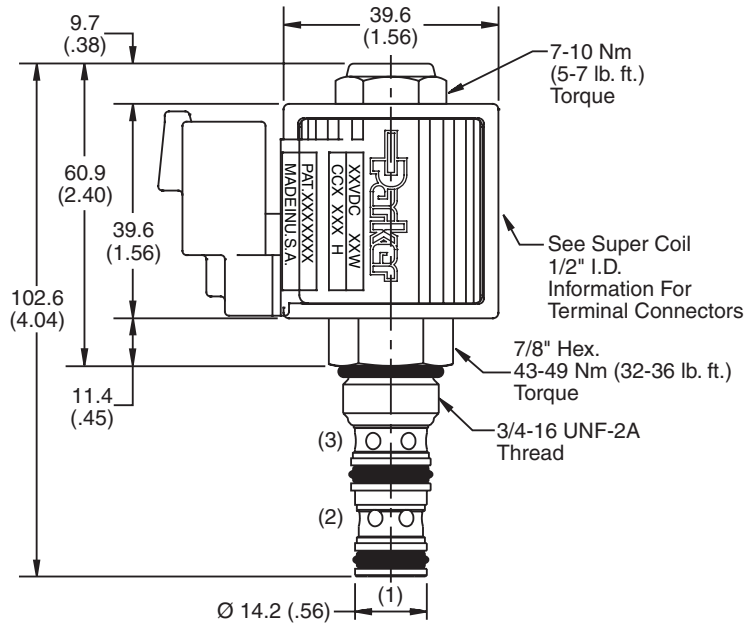

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH083</b>          |       |                 |       |           |              |                  |       |               |           |
| 08 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| A    |       |
| B    |       |
| C    |       |
| N    |       |

| Code | Override Options            |
|------|-----------------------------|
| Omit | None                        |
| T    | Push & Twist* (N.C. & N.O.) |

\*Requires Super Coil

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK08-3)      |
| N    | Nitrile / (SK08-3N)      |
| V    | Fluorocarbon / (SK08-3V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 19 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only


| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |


| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4P   | 1/4" NPTF      | (B08-3-*4P)   |
| 4T   | SAE-4          | (B08-3-*4T)   |
| 6T   | SAE-6          | (B08-3-*6T)   |
| 6B   | 3/8" BSPG      | (B08-3-*6B)   |

\* Add "A" for aluminum, omit for steel.


**Pressure Drop vs. Flow (Through cartridge only)**

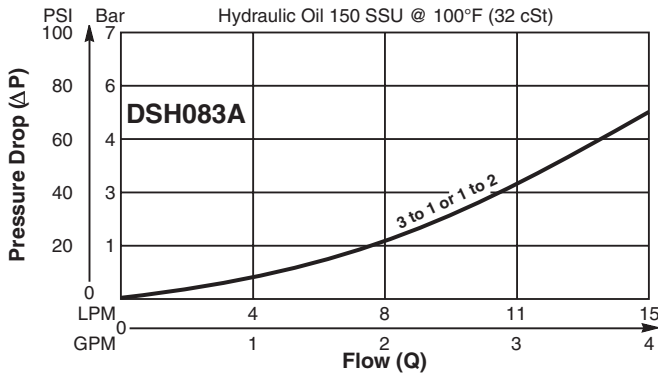


**Shift Limit Characteristics (Min. Operating Voltage)**

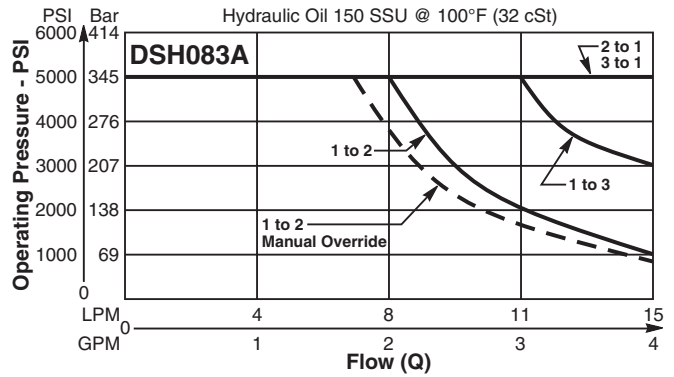


**Pressure Drop vs. Flow (Through cartridge only)**

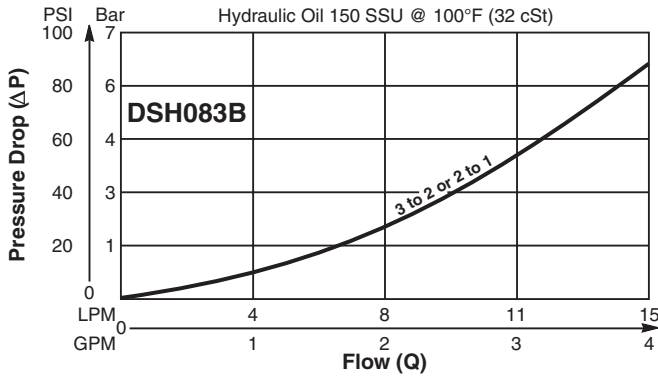


**Shift Limit Characteristics (Min. Operating Voltage)**

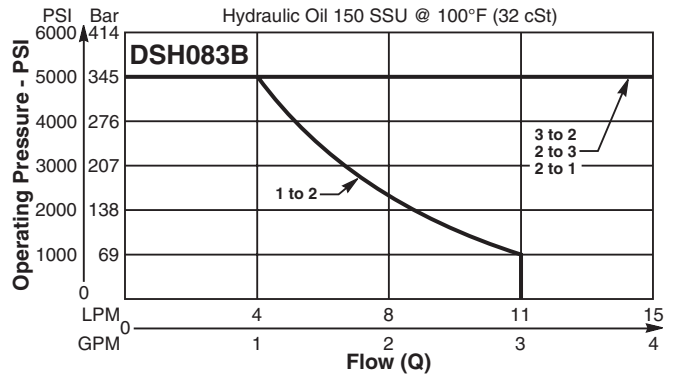


**Pressure Drop vs. Flow (Through cartridge only)**

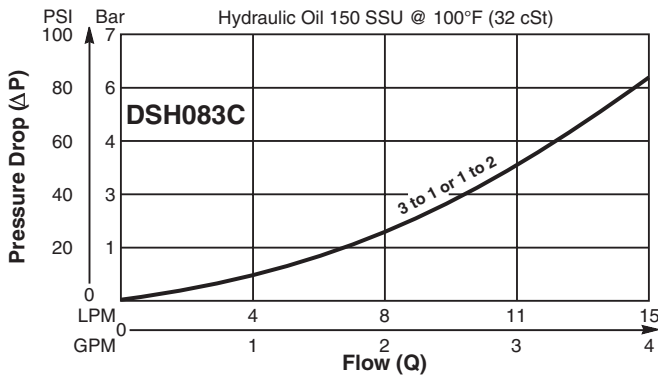


**Shift Limit Characteristics (Min. Operating Voltage)**

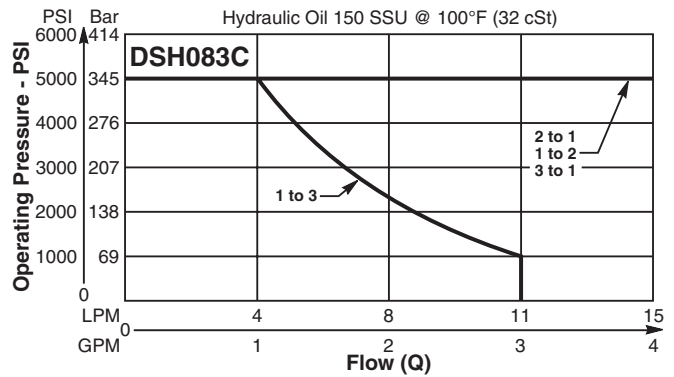

**Pressure Drop vs. Flow (Through cartridge only)**

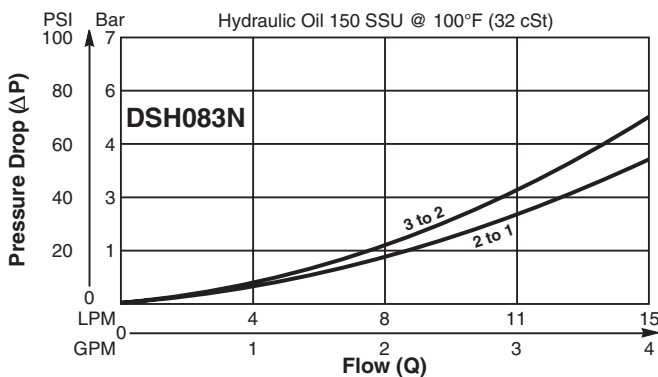

**Shift Limit Characteristics (Min. Operating Voltage)**

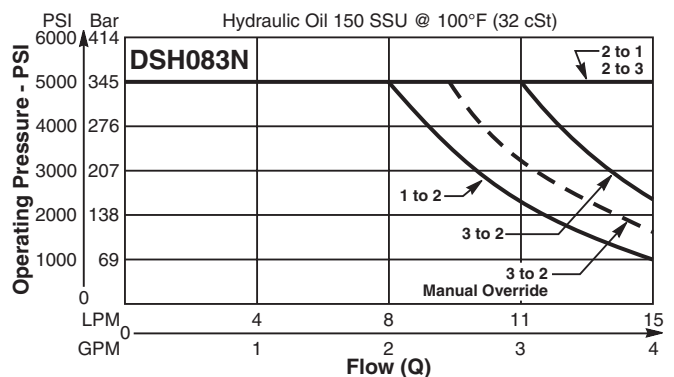

**CV**

Check Valves

**SH**

Shuttle Valves

**LM**

Load/Motor Controls

**FC**

Flow Controls

**PC**

Pressure Controls

**LE**

Logic Elements

**DC**

Directional Controls

**MV**

Manual Valves

**SV**

Solenoid Valves

**PV**

Proportional Valves

**CE**

Coils & Electronics

**BC**

Bodies & Cavities

**TD**

Technical Data

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

3-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.




## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring
- All external parts zinc plated


## Specifications

|                               |                                                                                                        |                    |
|-------------------------------|--------------------------------------------------------------------------------------------------------|--------------------|
| Rated Flow                    | <b>DSL103A</b>                                                                                         |                    |
|                               | N.O.                                                                                                   | 22.7 LPM (6.0 GPM) |
|                               | N.C.                                                                                                   | 17.0 LPM (4.5 GPM) |
|                               | Selector                                                                                               | 17.0 LPM (4.5 GPM) |
|                               | <b>DSL103B</b>                                                                                         |                    |
|                               | N.C.                                                                                                   | 30.2 LPM (8.0 GPM) |
|                               | Selector                                                                                               | 30.2 LPM (8.0 GPM) |
|                               | <b>DSL103C</b>                                                                                         |                    |
|                               | N.O.                                                                                                   | 30.2 LPM (8.0 GPM) |
|                               | <b>DSL103N</b>                                                                                         |                    |
| Maximum Inlet Pressure        | N.O.                                                                                                   | 18.8 LPM (5.0 GPM) |
|                               | N.C.                                                                                                   | 18.8 LPM (5.0 GPM) |
|                               | Selector                                                                                               | 30.2 LPM (8.0 GPM) |
|                               | Selector                                                                                               | 30.2 LPM (8.0 GPM) |
| Maximum Inlet Pressure        | 250 Bar (3600 PSI)                                                                                     |                    |
| Leakage at 150 SSU (32 cSt)   | 120 cc/min. (7.5 in <sup>3</sup> /min.)                                                                |                    |
|                               | DSL103B - 180 cc/min. (11 in <sup>3</sup> /min.)                                                       |                    |
|                               | DSL103N - 180 cc/min. (11 in <sup>3</sup> /min.)                                                       |                    |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                   |                    |
| Response Time                 | 50 ms to 100 ms                                                                                        |                    |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                   |                    |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)                                                       |                    |
|                               | -31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)                                                |                    |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt) |                    |
| Filtration                    | ISO Code 16/13, SAE Class 4 or better                                                                  |                    |
| Approx. Weight                | .19 kg (.42 lbs.)                                                                                      |                    |
| Cavity                        | C10-3 (See BC Section for more details)                                                                |                    |
| Form Tool                     | Rougher                                                                                                | NFT10-3R           |
|                               | Finisher                                                                                               | NFT10-3F           |




## Construction/Symbols


## DSL103A

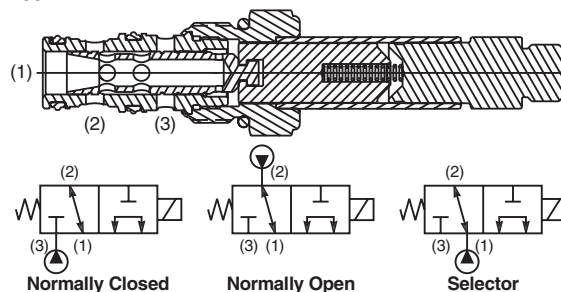


## DSL103B

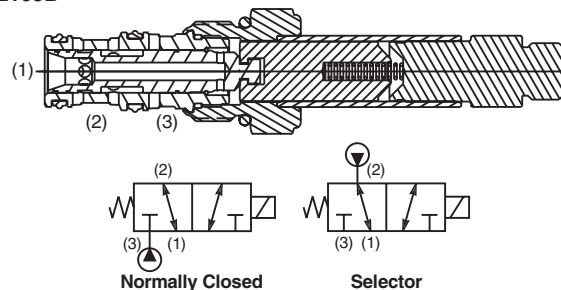

## DSL103C

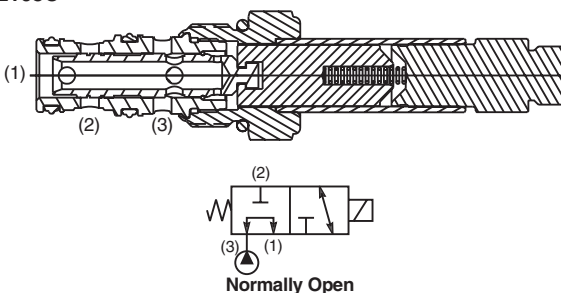


## DSL103N

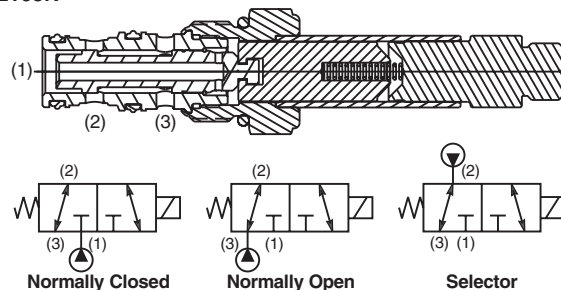

Spool Type, 3-Way Valve  
Series DSL103

Dimensions    Millimeters (Inches)

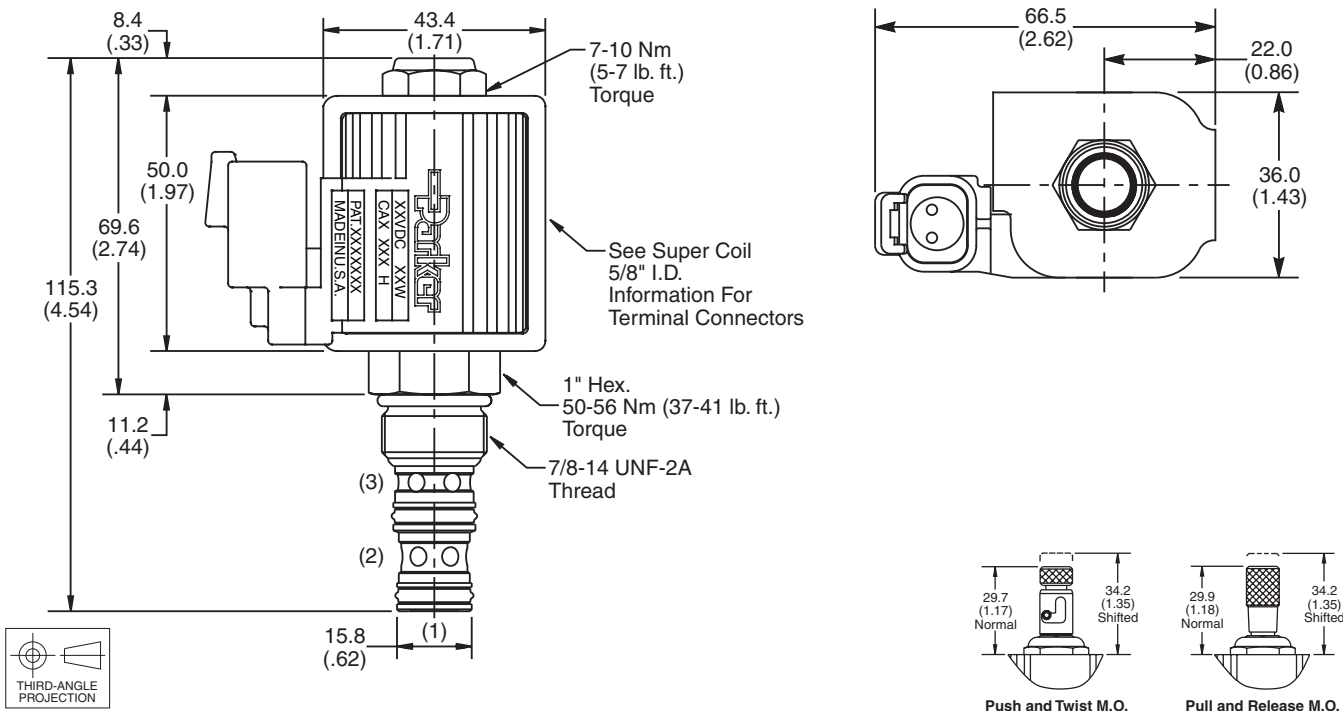

Ordering Information

**DSL103**    ☐    ☐    ☐    ☐    ☐    ☐    ☐    ☐    ☐    ☐

**10 Size Solenoid Valve**    **Style**    **Override Option**    **Seals**    **Coil Type**    **Coil Voltage**    **Coil Termination**    **Diode**    **Body Material**    **Port Size**

| Code | Style |
|------|-------|
| A    |       |
| B    |       |
| C    |       |
| N    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| P    | Pull & Release   |
| T    | Push & Twist     |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK10-3)      |
| N    | Nitrile / (SK10-3N)      |
| V    | Fluorocarbon / (SK10-3V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 28 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4P   | 1/4" NPTF      | (B10-3-*4P)   |
| 6P   | 3/8" NPTF      | (B10-3-*6P)   |
| 8P   | 1/2" NPTF      | (B10-3-*8P)   |
| 6T   | SAE-6          | (B10-3-*6T)   |
| 8T   | SAE-8          | (B10-3-*8T)   |
| 6B   | 3/8" BSPG      | (B10-3-6B)†   |
| 8B   | 1/2" BSPG      | (B10-3-*8B)   |

\* Add "A" for aluminum, omit for steel.  
† Steel bodies only.

## Performance Curves

Spool Type, 3-Way Valve  
Series DSL103

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics


BC

Bodies &  
Cavities


TD

Technical  
Data


## Pressure Drop vs. Flow (Through cartridge only)

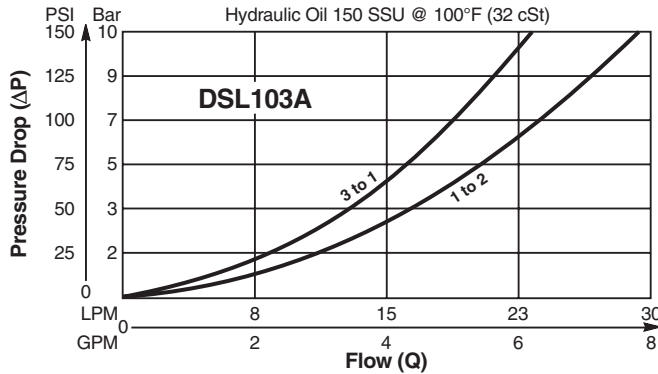


## Shift Limit Characteristics (Min. Operating Voltage)

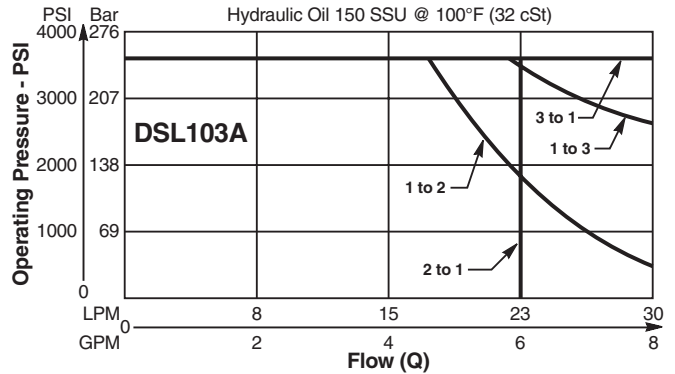


## Pressure Drop vs. Flow (Through cartridge only)

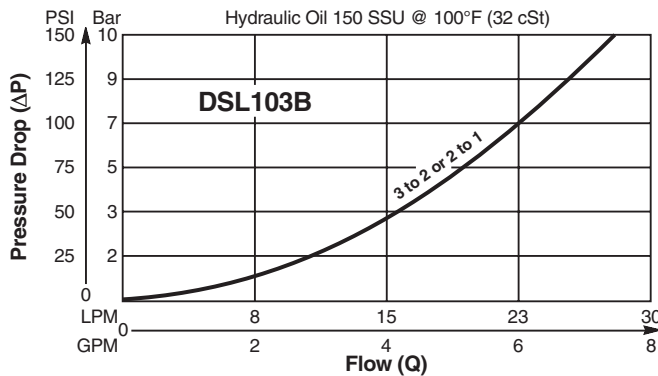


## Shift Limit Characteristics (Min. Operating Voltage)

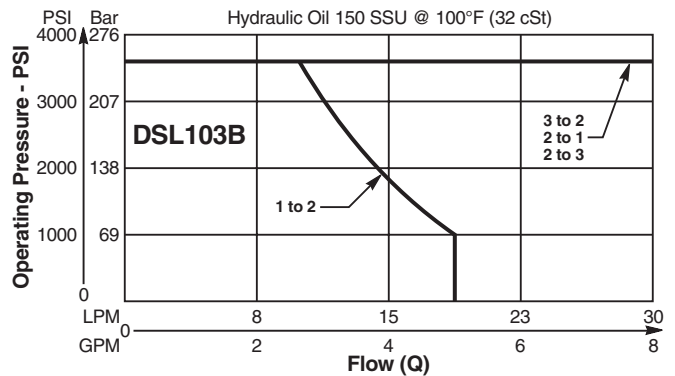


## Pressure Drop vs. Flow (Through cartridge only)

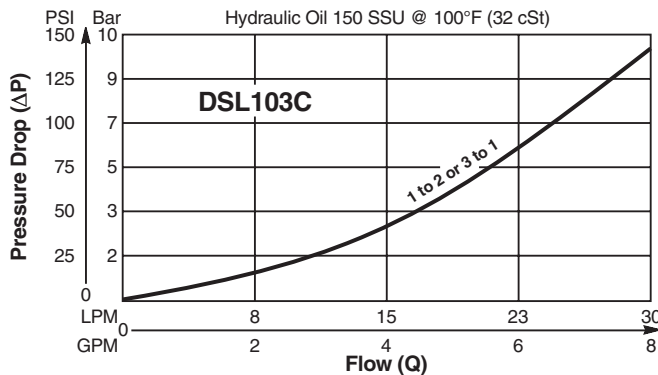


## Shift Limit Characteristics (Min. Operating Voltage)

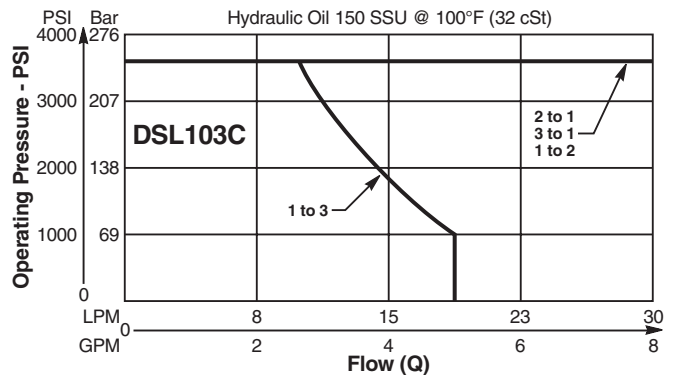

## Pressure Drop vs. Flow (Through cartridge only)

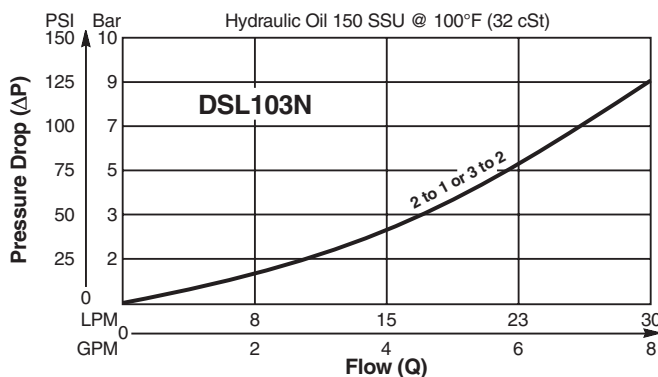

## Shift Limit Characteristics (Min. Operating Voltage)

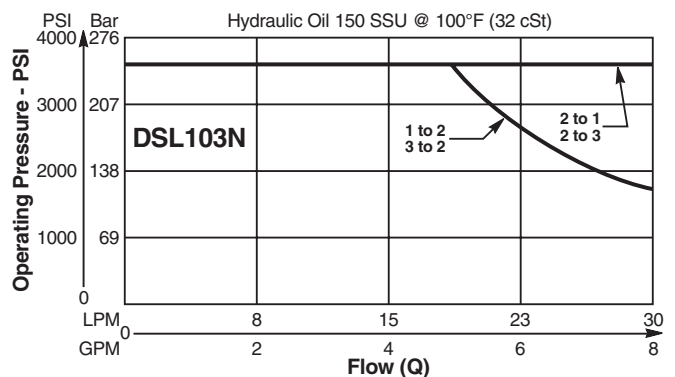

## General Description

3-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.




## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated


## Specifications

|                               |                                                                                                                                                |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Flow                    | <b>DSH103A</b>                                                                                                                                 |
|                               | N.O. 17.0 LPM (4.5 GPM)                                                                                                                        |
|                               | N.C. 15.0 LPM (4.0 GPM)                                                                                                                        |
|                               | Selector 15.0 LPM (4.0 GPM)                                                                                                                    |
|                               | <b>DSH103B</b>                                                                                                                                 |
|                               | N.C. 30.0 LPM (8.0 GPM)                                                                                                                        |
| Maximum Inlet Pressure        | Selector 30.0 LPM (8.0 GPM)                                                                                                                    |
|                               | <b>DSH103C</b>                                                                                                                                 |
|                               | N.O. 30.0 LPM (8.0 GPM)                                                                                                                        |
|                               | <b>DSH103N</b>                                                                                                                                 |
|                               | N.O. 15.0 LPM (4.0 GPM)                                                                                                                        |
|                               | N.C. 15.0 LPM (4.0 GPM)                                                                                                                        |
|                               | Selector 30.0 LPM (8.0 GPM)                                                                                                                    |
| Leakage at 150 SSU (32 cSt)   | 160 cc/min. (10 in <sup>3</sup> /min.)<br>DSH103B - 250 cc/min. (15 in <sup>3</sup> /min.)<br>DSH103N - 250 cc/min. (15 in <sup>3</sup> /min.) |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                                                           |
| Response Time                 | 50 ms to 100 ms                                                                                                                                |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                                                           |
| Operating Temp. Range/Seals   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)                                    |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)                                         |
| Filtration                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                                                       |
| Approx. Weight                | .19 kg (.42 lbs.)                                                                                                                              |
| Cavity                        | C10-3<br>(See BC Section for more details)                                                                                                     |
| Form Tool                     | Rougher NFT10-3R<br>Finisher NFT10-3F                                                                                                          |




## Construction/Symbols


DSH103A

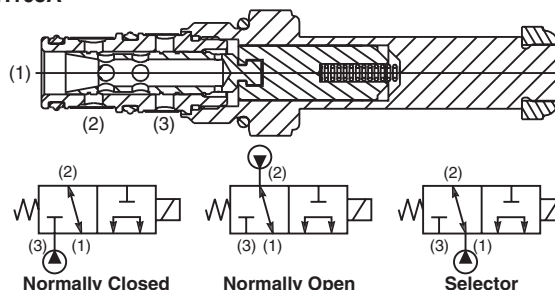


DSH103B

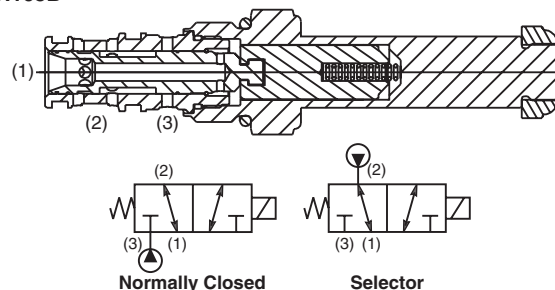

DSH103C

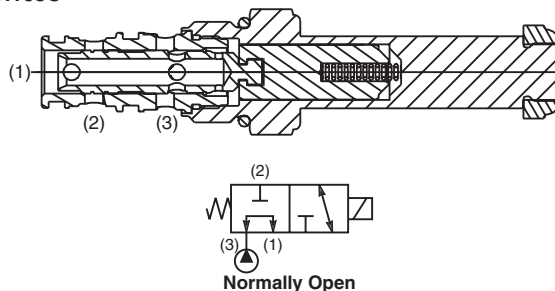

DSH103N

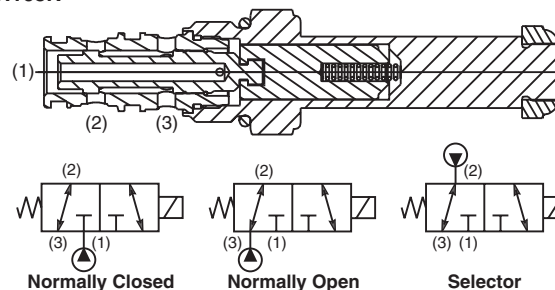

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC




Bodies &  
Cavities

TD

Technical  
Data

Spool Type, 3-Way Valve  
Series DSH103

Dimensions    Millimeters (Inches)

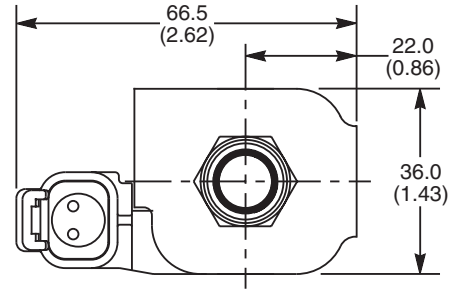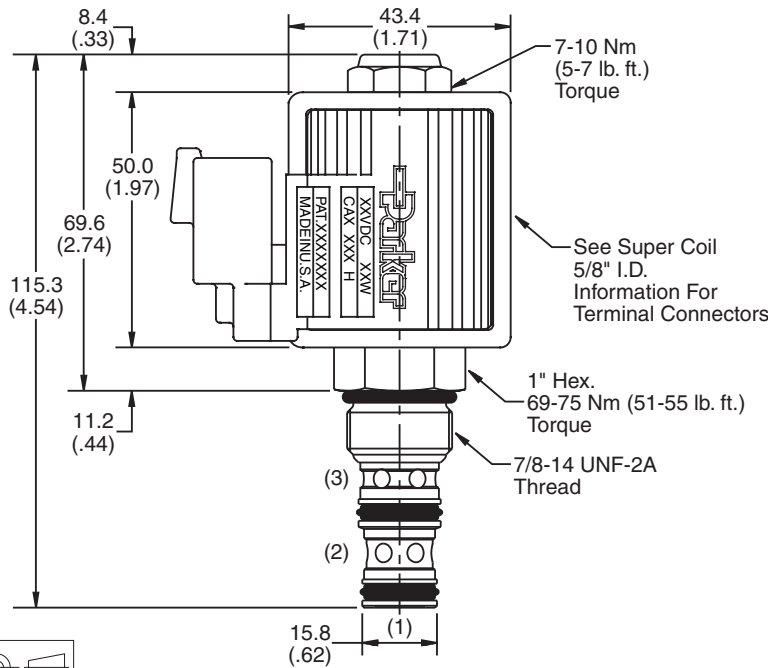

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH103</b>          |       |                 |       |           |              |                  |       |               |           |
| 10 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| A    |       |
| B    |       |
| C    |       |
| N    |       |

| Code | Override Options           |
|------|----------------------------|
| Omit | None                       |
| T    | Push & Twist (N.C. & N.O.) |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK10-3)      |
| N    | Nitrile / (SK10-3N)      |
| V    | Fluorocarbon / (SK10-3V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 28 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only


| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |


| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4P   | 1/4" NPTF      | (B10-3-*4P)   |
| 6P   | 3/8" NPTF      | (B10-3-*6P)   |
| 8P   | 1/2" NPTF      | (B10-3-*8P)   |
| 6T   | SAE-6          | (B10-3-*6T)   |
| 8T   | SAE-8          | (B10-3-*8T)   |
| 6B   | 3/8" BSPG      | (B10-3-6B)†   |
| 8B   | 1/2" BSPG      | (B10-3-*8B)   |

\* Add "A" for aluminum, omit for steel.  
† Steel bodies only.


**Pressure Drop vs. Flow (Through cartridge only)**

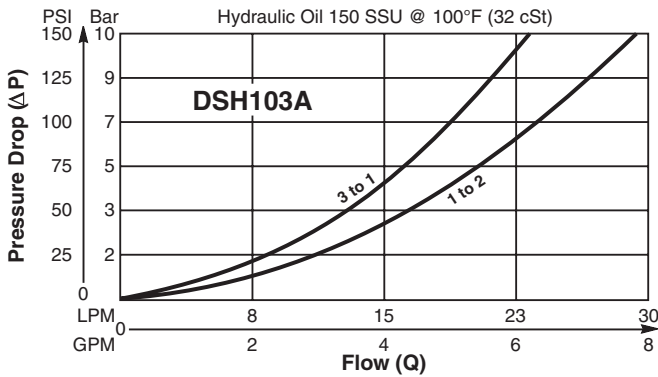


**Shift Limit Characteristics (Min. Operating Voltage)**

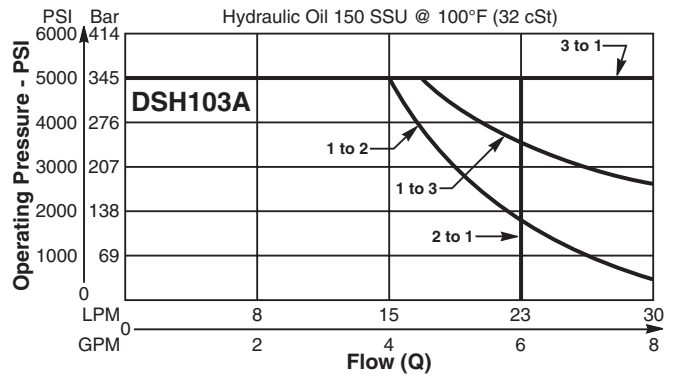


**Pressure Drop vs. Flow (Through cartridge only)**

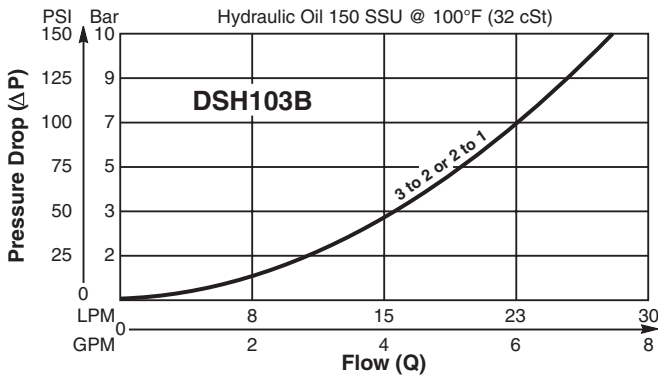


**Shift Limit Characteristics (Min. Operating Voltage)**

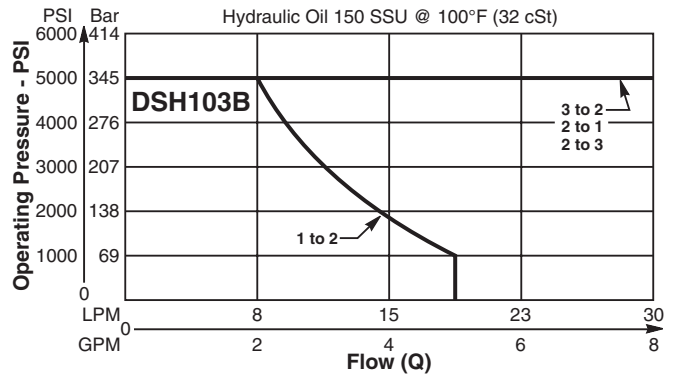


**Pressure Drop vs. Flow (Through cartridge only)**

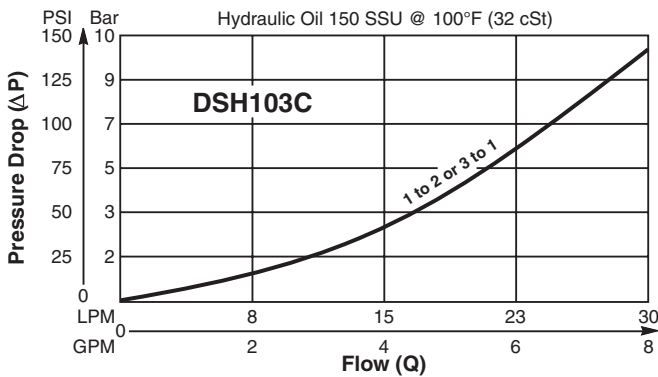


**Shift Limit Characteristics (Min. Operating Voltage)**

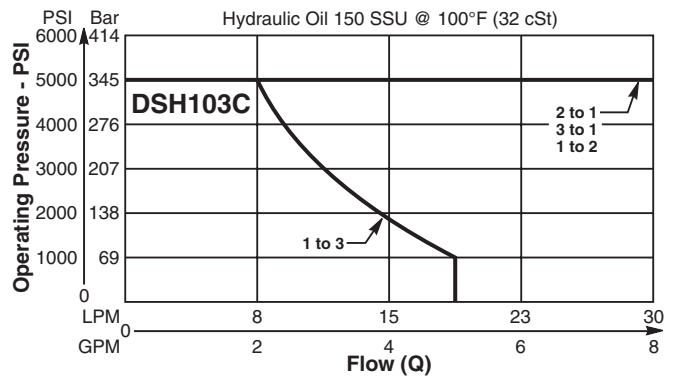

**Pressure Drop vs. Flow (Through cartridge only)**

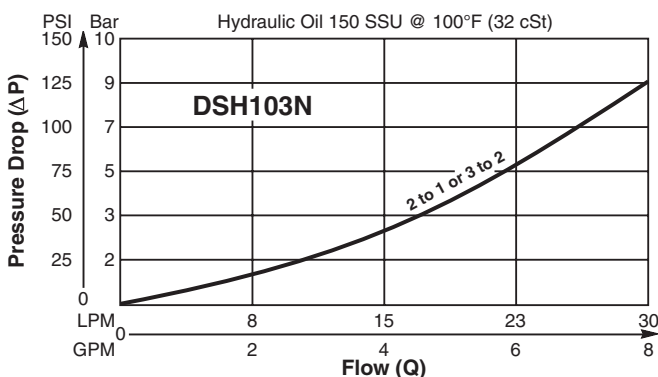

**Shift Limit Characteristics (Min. Operating Voltage)**

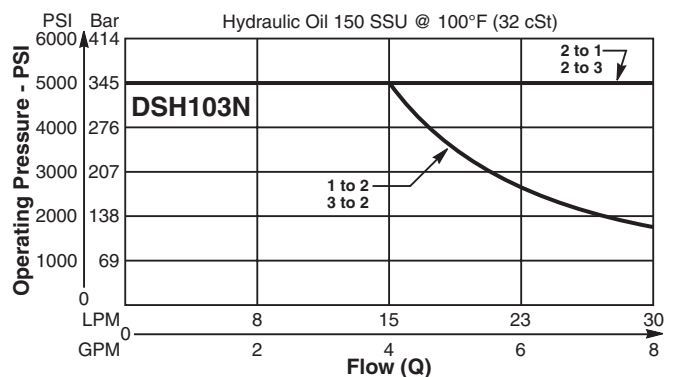

**CV**

Check  
Valves

**SH**

Shuttle  
Valves

**LM**

Load/Motor  
Controls

**FC**

Flow  
Controls

**PC**

Pressure  
Controls

**LE**

Logic  
Elements

**DC**

Directional  
Controls

**MV**

Manual  
Valves

**SV**

Solenoid  
Valves

**PV**

Proportional  
Valves

**CE**

Coils &  
Electronics

**BC**

Bodies &  
Cavities

**TD**

Technical  
Data

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description




3-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features


- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- No dynamic seals
- Variety of coil terminations
- All external parts zinc plated
- Manual override standard

## Specifications

|                               |                                                                                                            |
|-------------------------------|------------------------------------------------------------------------------------------------------------|
| Rated Flow                    | <b>DS163</b>                                                                                               |
|                               | N.O. 45.4 LPM (12 GPM)                                                                                     |
|                               | N.C. 49.2 LPM (13 GPM)                                                                                     |
|                               | Selector 41.6 LPM (11 GPM)                                                                                 |
|                               | <b>DS163B</b>                                                                                              |
|                               | N.O. 26.5 LPM (7 GPM)                                                                                      |
|                               | N.C. 53.0 LPM (14 GPM)                                                                                     |
|                               | Selector 56.8 LPM (15 GPM)                                                                                 |
| Maximum Inlet Pressure        | 210 Bar (3000 PSI)                                                                                         |
| Leakage at 150 SSU (32 cSt)   | 82 cc/min. (5 in <sup>3</sup> /min.)                                                                       |
| Minimum Operating Voltage     | 85% of rated voltage at 20°C (72°F).                                                                       |
| Response Time                 | Normally Closed up to 90 ms<br>Normally Open up to 100 ms                                                  |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                       |
| Operating Temp. Range/Seals   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| Filtration                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| Approx. Weight                | .59 kg (1.3 lbs.)                                                                                          |
| Cavity                        | C16-3<br>(See BC Section for more details)                                                                 |
| Form Tool                     | Rougher NFT16-3R                                                                                           |
|                               | Finisher NFT16-3F                                                                                          |

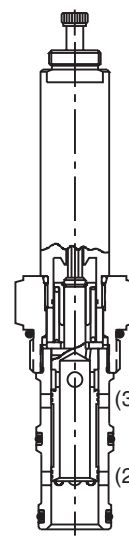


DS163

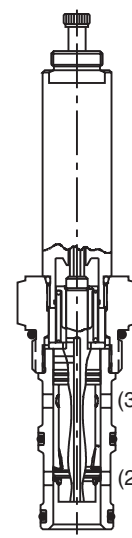


DS163B

## Dimensions Millimeters (Inches)

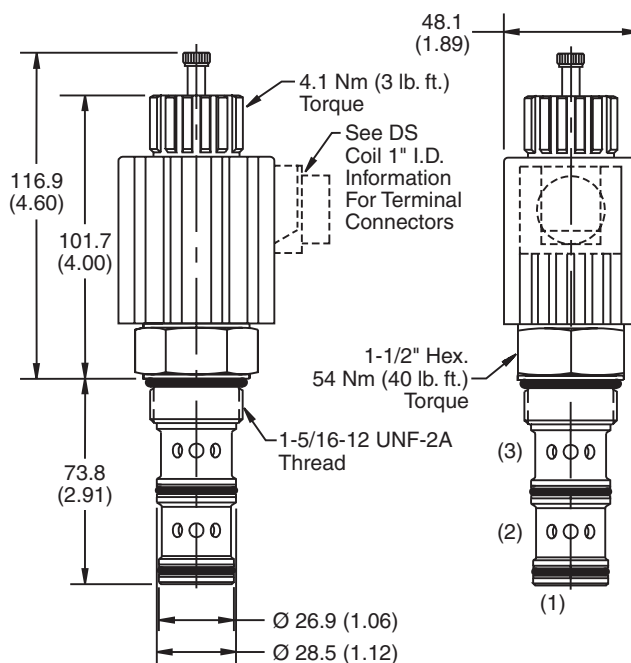


## Performance Curves


**Pressure Drop vs. Flow (Through cartridge only)**

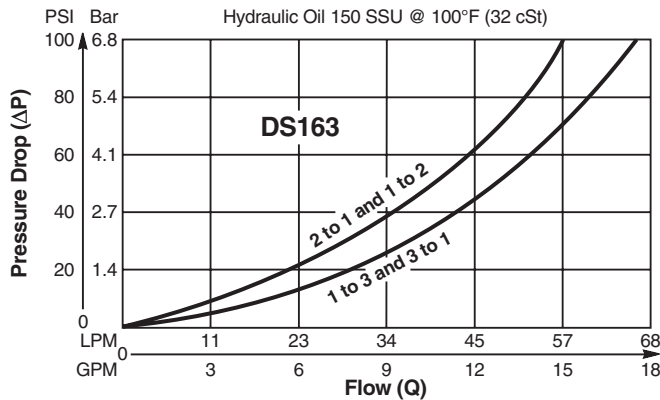


**Shift Limit Characteristics (Min. Operating Voltage)**

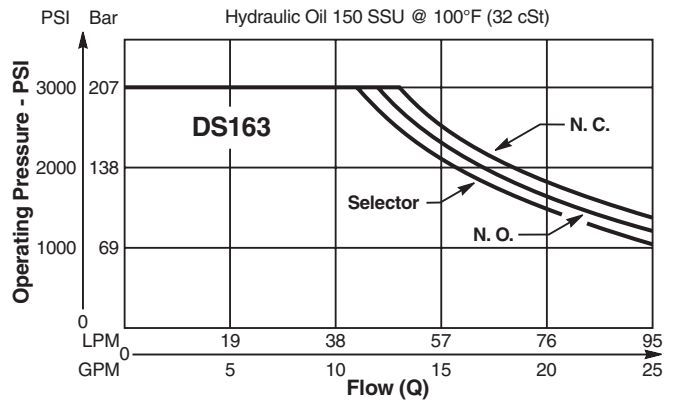

**Pressure Drop vs. Flow (Through cartridge only)**

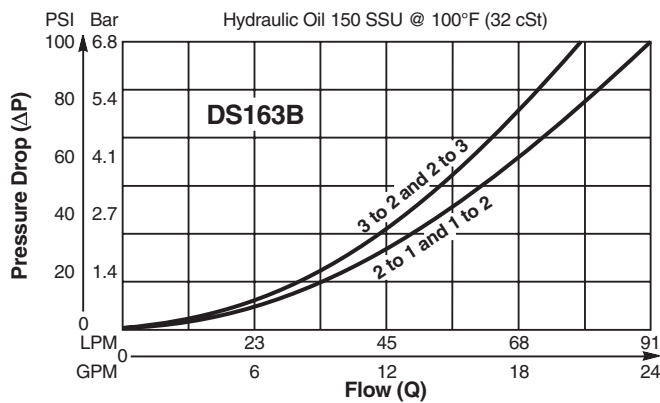

**Shift Limit Characteristics (Min. Operating Voltage)**

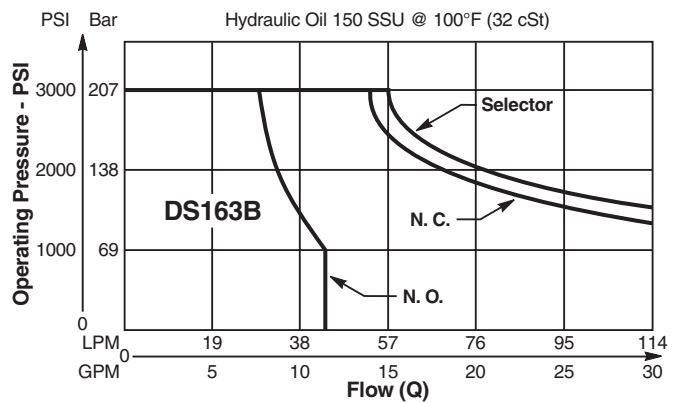

## Ordering Information

|                        |                          |                          |                          |                          |                          |                          |
|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <b>DS163</b>           | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 16 Size Solenoid Valve | Style                    | Seals                    | Coil Voltage             | Coil Termination         | Body Material            | Port Size                |

| Code | Style |
|------|-------|
| Omit |       |
| B    |       |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | Nitrile / (SK16-3)       |
| V    | Fluorocarbon / (SK16-3V) |

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |

| Code | Coil Termination     |
|------|----------------------|
| Omit | Without Coil         |
| C    | Conduit (AC Only)    |
| D    | DIN Plug Face        |
| S    | Dual Screw (DC Only) |
| W    | Dual Lead (DC Only)  |

See DS coil 1" I.D. (42 watt)

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 12T  | SAE-12         | (B16-3-*12T)  |
| 16T  | SAE-16         | (B16-3-*16T)  |

\* Add "A" for aluminum, omit for steel.

## Technical Information

Spool Type, 4-Way Valve  
Series DSL084

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated

## Specifications



|                                      |                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | 11-15 LPM (3-4 GPM)                                                                                         |
| <b>Maximum Inlet Pressure</b>        | 250 Bar (3600 PSI)                                                                                          |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min. (10 in <sup>3</sup> /min.) at 250 Bar (3600 PSI)                                                |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                        |
| <b>Response Time</b>                 | Energized - 50 ms<br>De-energized - 30 ms                                                                   |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                        |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                       |
| <b>Approx. Weight</b>                | .13 kg (.29 lbs.)                                                                                           |
| <b>Cavity</b>                        | C08-4<br>(See BC Section for more details)                                                                  |
| <b>Form Tool</b>                     | Rougher    NFT08-4R<br>Finisher    NFT08-4F                                                                 |

## Curve Selection Chart

| SPOOL CODE | NEUTRAL |        |        |        |        | SHIFTED |        |        |        |  |
|------------|---------|--------|--------|--------|--------|---------|--------|--------|--------|--|
|            | 4 to 1  | 3 to 2 | 2 to 1 | 3 to 1 | 3 to 4 | 4 to 1  | 3 to 2 | 2 to 1 | 3 to 4 |  |
| B          | 4       | 3      | —      | —      | —      | —       | —      | 2      | 4      |  |
| E1         | —       | —      | —      | —      | —      | —       | —      | 2      | 3      |  |
| M          | —       | —      | 3      | —      | 1      | —       | —      | —      | —      |  |
| N          | —       | —      | —      | —      | —      | 4       | 3      | —      | —      |  |




DSL084B

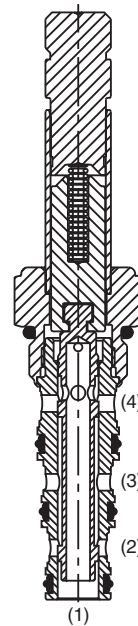


DSL084B

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

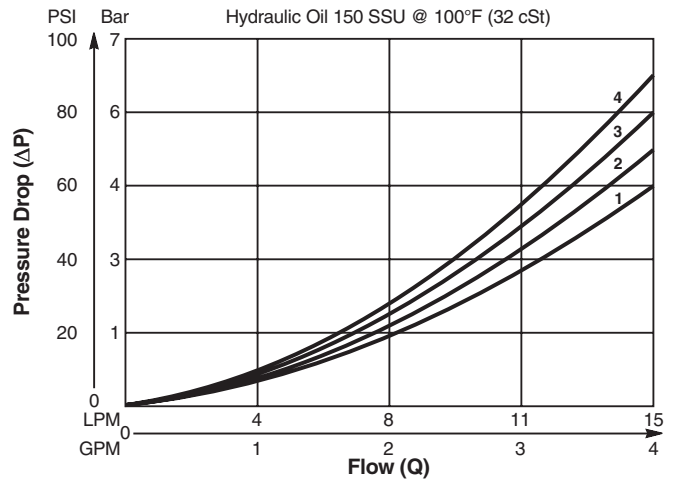

## Shift Limit Characteristics (Min. Operating Voltage)

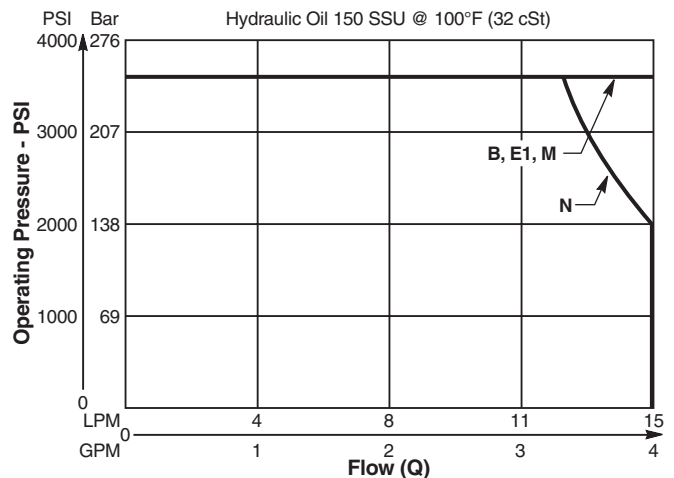

Dimensions    Millimeters (Inches)

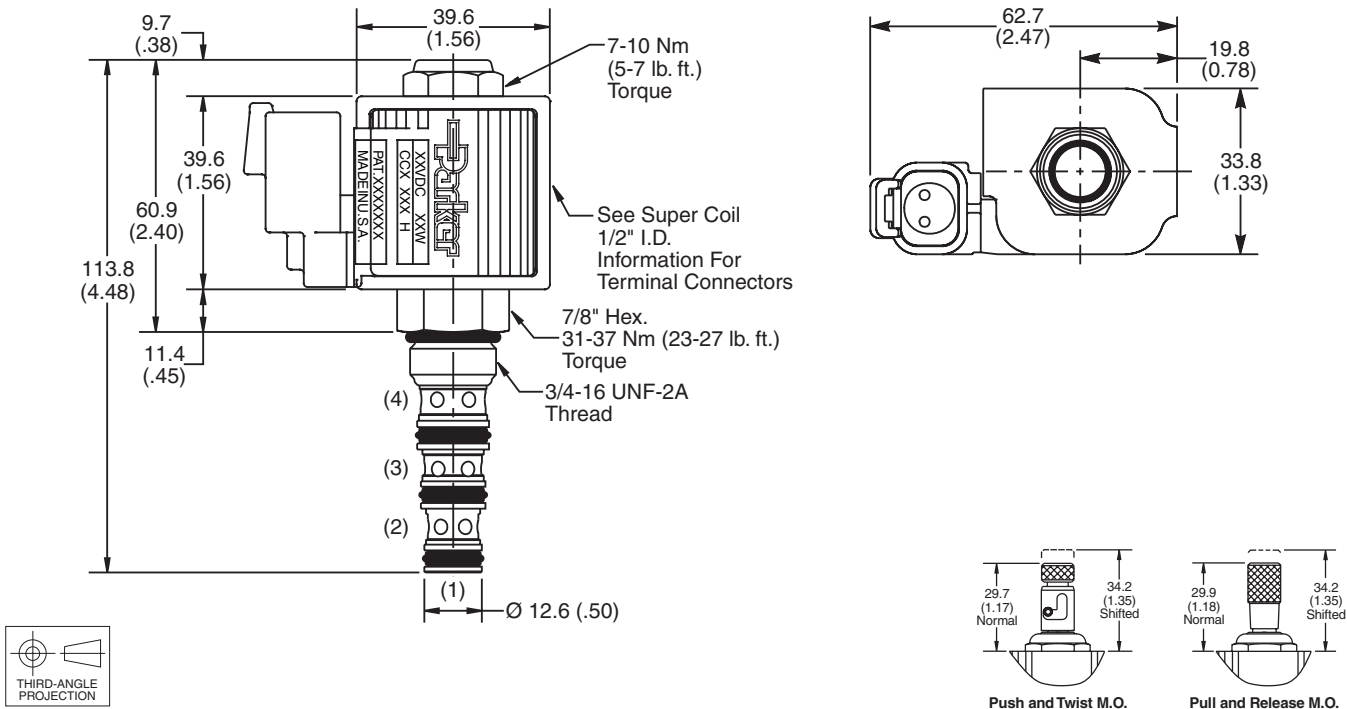

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSL084</b>          |       |                 |       |           |              |                  |       |               |           |
| 08 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| B    |       |
| N    |       |
| E1   |       |
| M    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| P    | Pull & Release   |
| T    | Push & Twist     |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK08-4)      |
| N    | Nitrile / (SK08-4N)      |
| V    | Fluorocarbon / (SK08-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 19 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4T   | SAE-4          | (B08-4-*4T)   |
| 6T   | SAE-6          | (B08-4-*6T)   |
| 6B   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

# Technical Information

## Spool Type, 4-Way Valve Series DSH084

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

### General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.



### Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated

### Specifications



|                                      |                                                                                                                  |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | 11-15 LPM (3-4 GPM)                                                                                              |
| <b>Max. Inlet Pressure</b>           | 350 Bar (5000 PSI)                                                                                               |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min. (10 in <sup>3</sup> /min.) at 350 Bar (5000 PSI)<br>DSH084B - 240 cc/min. (15 in <sup>3</sup> /min.) |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                             |
| <b>Response Time</b>                 | Energized - 50 ms<br>De-energized - 30 ms                                                                        |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                             |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring) (-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon) (-25°F to +250°F)            |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)           |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                            |
| <b>Approx. Weight</b>                | .13 kg (.29 lbs.)                                                                                                |
| <b>Cavity</b>                        | C08-4 (See BC Section for more details)                                                                          |
| <b>Form Tool</b>                     | Rougher NFT08-4R<br>Finisher NFT08-4F                                                                            |

### Curve Selection Chart

| SPOOL CODE | NEUTRAL |        |        |        |        | SHIFTED |        |        |        |  |
|------------|---------|--------|--------|--------|--------|---------|--------|--------|--------|--|
|            | 4 to 1  | 3 to 2 | 2 to 1 | 3 to 1 | 3 to 4 | 4 to 1  | 3 to 2 | 2 to 1 | 3 to 4 |  |
| B          | 4       | 3      | —      | —      | —      | —       | —      | 2      | 4      |  |
| E1         | —       | —      | —      | —      | —      | —       | —      | 2      | 3      |  |
| M          | —       | —      | 3      | —      | 1      | —       | —      | —      | —      |  |
| N          | —       | —      | —      | —      | —      | 4       | 3      | —      | —      |  |




DSH084B

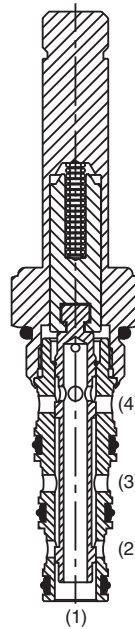


DSH084B

### Performance Curves


#### Pressure Drop vs. Flow (Through cartridge only)

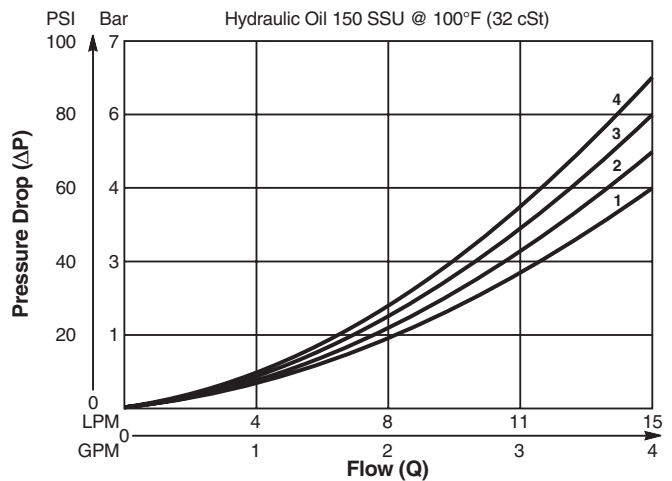

#### Shift Limit Characteristics (Min. Operating Voltage)

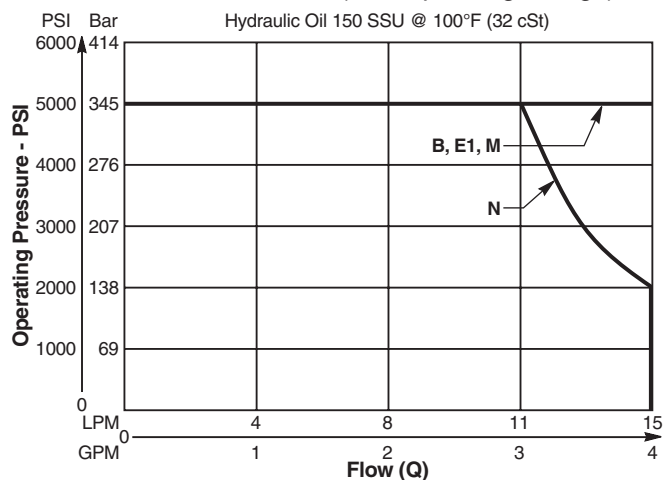

Dimensions    Millimeters (Inches)

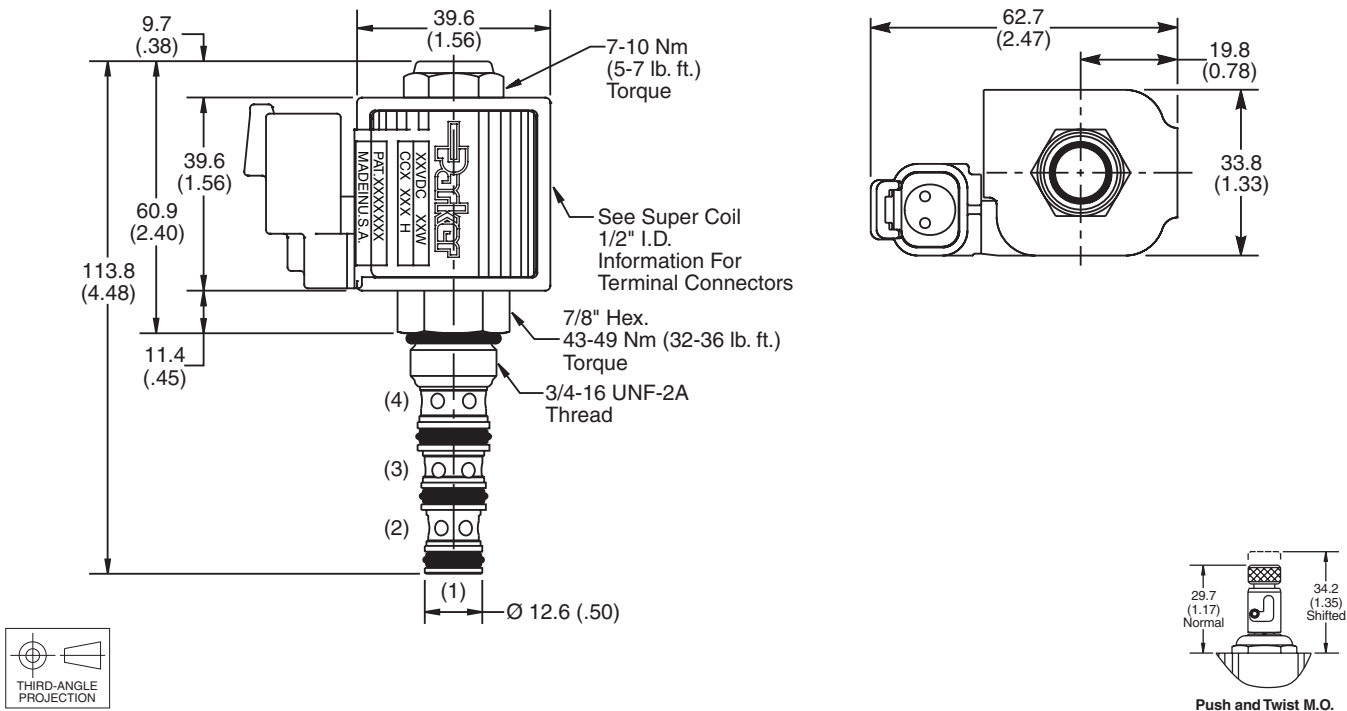

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH084</b>          |       |                 |       |           |              |                  |       |               |           |
| 08 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| B    |       |
| N    |       |
| E1   |       |
| M    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| T    | Push & Twist*    |

\*Requires Super Coil

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK08-4)      |
| N    | Nitrile / (SK08-4N)      |
| V    | Fluorocarbon / (SK08-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 19 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 4T   | SAE-4          | (B08-4-*4T)   |
| 6T   | SAE-6          | (B08-4-*6T)   |
| 6B   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features



- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring
- All external parts zinc plated

## Specifications

|                                      |                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | 27-38 LPM (7-10 GPM)<br>See Shift Limit Characteristics                                                     |
| <b>Maximum Inlet Pressure</b>        | 250 Bar (3600 PSI)                                                                                          |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 230 cc/min (14 in <sup>3</sup> /min)                                                                        |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                        |
| <b>Response Time</b>                 | Energized - 30 - 60 ms<br>De-energized - 30 - 60 ms                                                         |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                        |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |
| <b>Filtration</b>                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |
| <b>Approx. Weight</b>                | .20 kg (.44 lbs.)                                                                                           |
| <b>Cavity</b>                        | C10-4<br>(See BC Section for more details)                                                                  |
| <b>Form Tool</b>                     | Rougher    NFT10-4R<br>Finisher    NFT10-4F                                                                 |




DSL104B

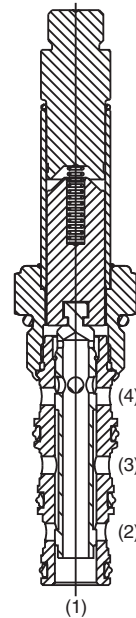


DSL104B

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

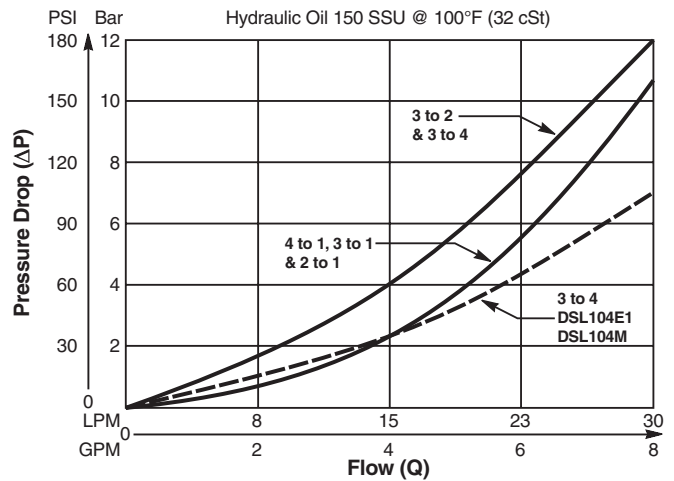

### Shift Limit Characteristics (Min. Operating Voltage)

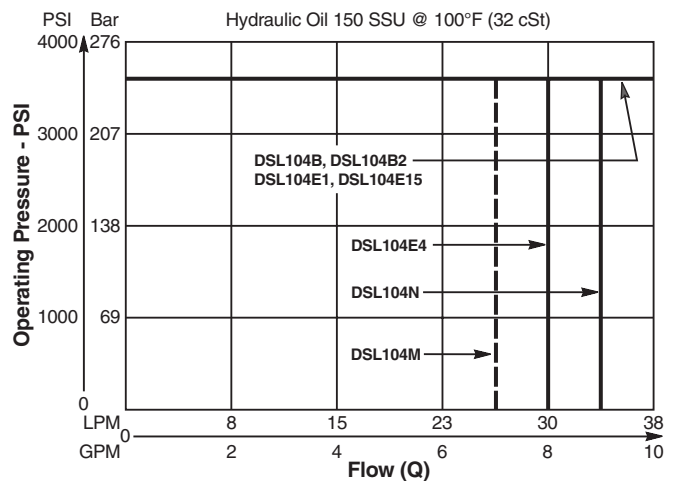

**Dimensions** Millimeters (Inches)

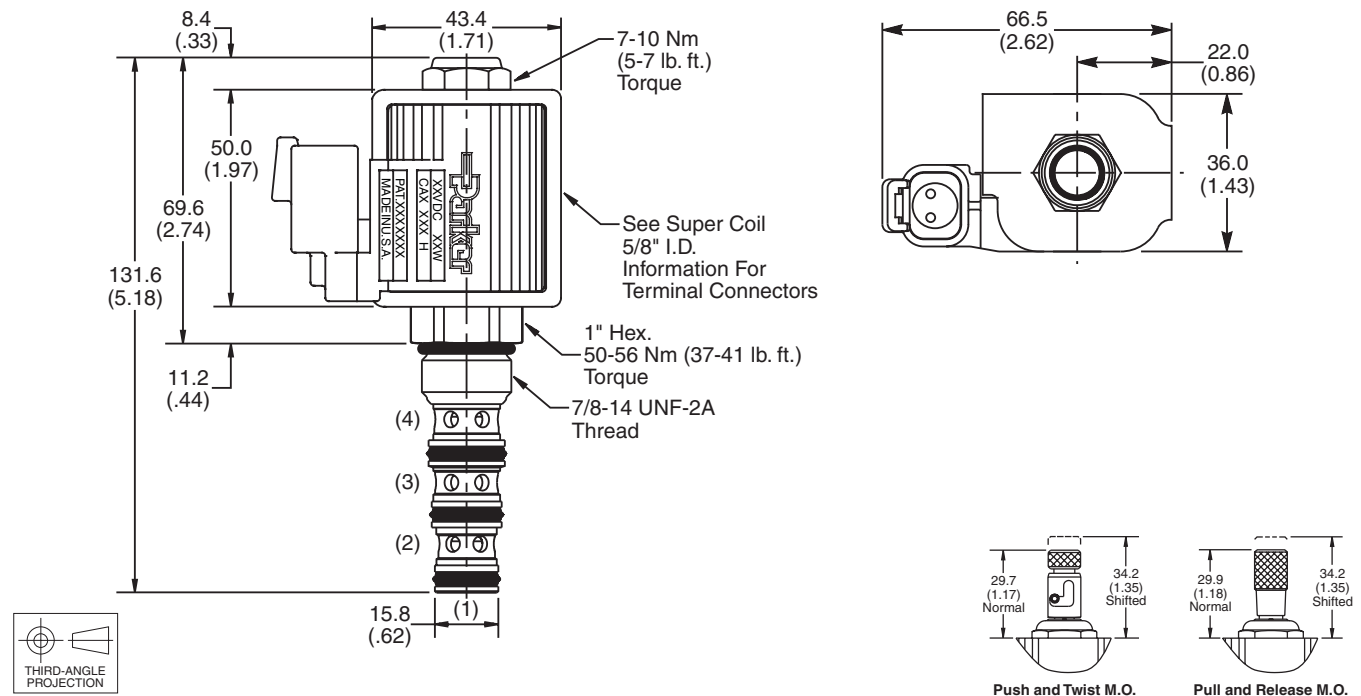

**Ordering Information**

|                               |              |                        |              |                  |                     |                         |              |                      |                  |
|-------------------------------|--------------|------------------------|--------------|------------------|---------------------|-------------------------|--------------|----------------------|------------------|
| <b>DSL104</b>                 |              |                        |              |                  |                     |                         |              |                      |                  |
| <b>10 Size Solenoid Valve</b> | <b>Style</b> | <b>Override Option</b> | <b>Seals</b> | <b>Coil Type</b> | <b>Coil Voltage</b> | <b>Coil Termination</b> | <b>Diode</b> | <b>Body Material</b> | <b>Port Size</b> |

| Code | Style |
|------|-------|
| B    |       |
| B2   |       |
| E1   |       |
| E4   |       |
| E15  |       |
| M    |       |
| N    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| P    | Pull & Release   |
| T    | Push & Twist     |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK10-4)      |
| N    | Nitrile / (SK10-4N)      |
| V    | Fluorocarbon / (SK10-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 28 Watts |

*\*Recommended*

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

*\*Recommended  
†DC Only*

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6P   | 3/8" NTPF      | (B10-4-*6P)   |
| 6T   | SAE-6          | (B10-4-*6T)   |
| 8T   | SAE-8          | (B10-4-*8T)   |
| 6B   | 3/8" BSPG      | (B10-4-6B)†   |

*\* Add "A" for aluminum, omit for steel.  
† Steel bodies only*

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features



- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Manual overrides, seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Polyurethane "D"-Ring eliminates need for backup rings
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated

## Specifications

|                                      |                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | 25 - 38 LPM (6.5 - 10 GPM)<br>See Shift Limit Characteristics                                               |
| <b>Maximum Inlet Pressure</b>        | 350 Bar (5000 PSI)                                                                                          |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min (10 in <sup>3</sup> /min)<br>DSH104B - 320 cc/min (19.5 in <sup>3</sup> /min)                    |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                        |
| <b>Response Time</b>                 | Energized - 30 - 60 ms<br>De-energized - 30 - 60 ms                                                         |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                        |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |
| <b>Filtration</b>                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                    |
| <b>Approx. Weight</b>                | .20 kg (.44 lbs.)                                                                                           |
| <b>Cavity</b>                        | C10-4<br>(See BC Section for more details)                                                                  |
| <b>Form Tool</b>                     | Rougher    NFT10-4R<br>Finisher    NFT10-4F                                                                 |




DSH104B

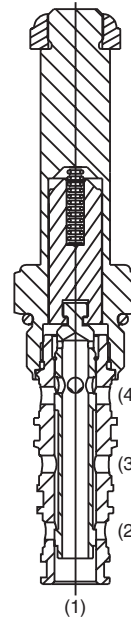


DSH104B

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

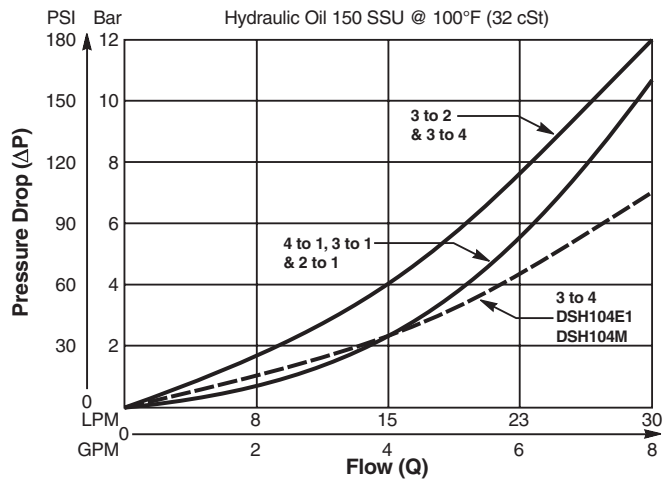

### Shift Limit Characteristics (Min. Operating Voltage)

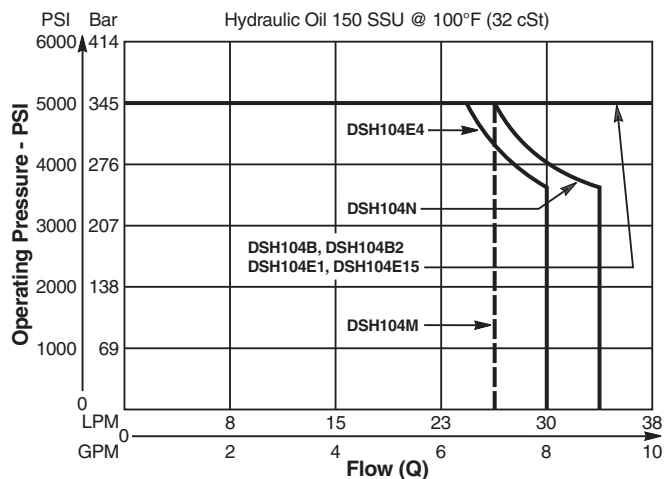

Dimensions    Millimeters (Inches)

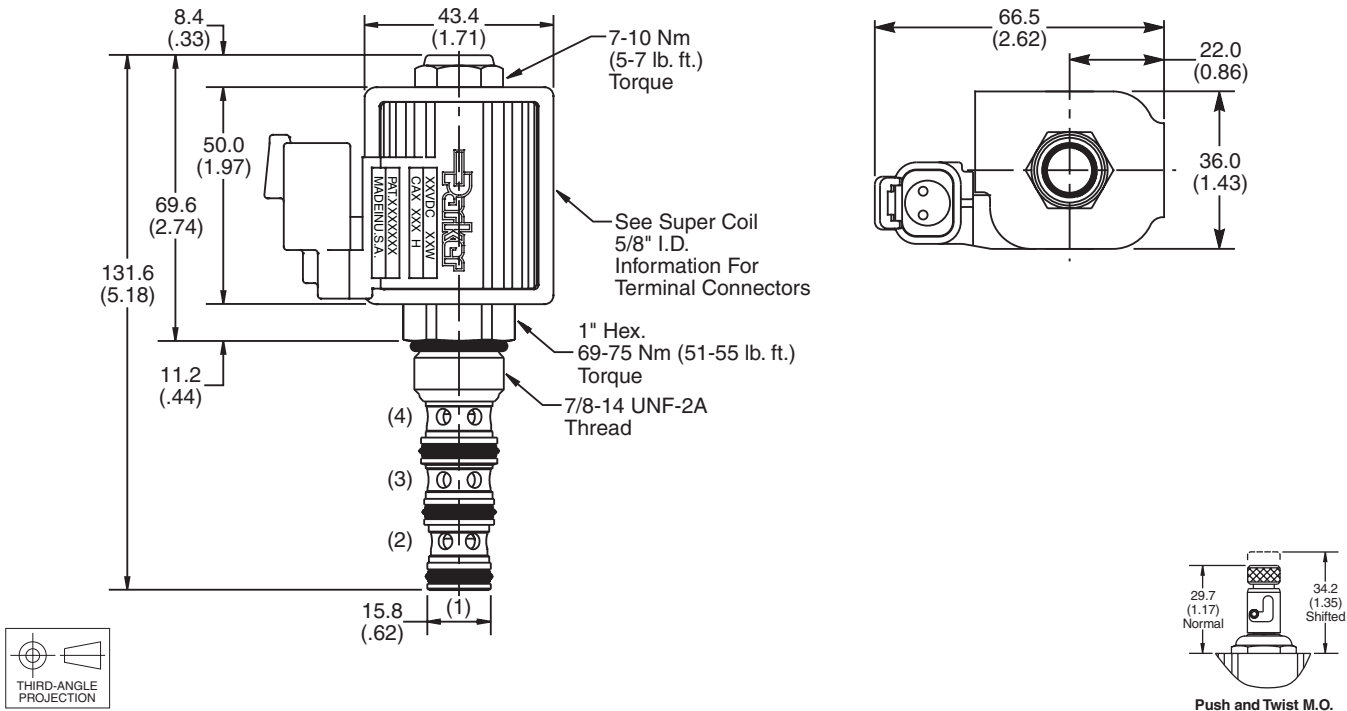

Ordering Information

|                        |       |                 |       |           |              |                  |       |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH104</b>          |       |                 |       |           |              |                  |       |               |           |
| 10 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style |
|------|-------|
| B    |       |
| B2   |       |
| E1   |       |
| E4   |       |
| E15  |       |
| M    |       |
| N    |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| T    | Push & Twist     |

| Code | Seals / Kit No.          |
|------|--------------------------|
| Omit | "D"-Ring / (SK10-4)      |
| N    | Nitrile / (SK10-4N)      |
| V    | Fluorocarbon / (SK10-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 28 Watts |

\*Recommended

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

\*Recommended  
†DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6P   | 3/8" NTPF      | (B10-4-*6P)   |
| 6T   | SAE-6          | (B10-4-*6T)   |
| 8T   | SAE-8          | (B10-4-*8T)   |
| 6B   | 3/8" BSPG      | (B10-4-6B)†   |

\* Add "A" for aluminum, omit for steel.  
† Steel bodies only

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.

## Features



- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- One-piece encapsulated coil with minimal amperage draw
- Seal variations and other options available
- No dynamic seals
- Variety of coil terminations
- Nylon inserted jam-nut provides secure holding in high vibration applications
- All external parts zinc plated

## Application Note

This valve is a pilot operated spool type valve. It does not require a separate pilot supply, but does require that the work port pressure or the inlet pressure is 40-60 psi higher than port 1. In an open flowing condition, with zero load and low flow, it will require a 4-6 gpm flow to create internal pilot pressure to shift. If load pressure or system pressure is 40-60 psi higher than tank, the valve will shift. Ultimately, the valve shifts based upon pressure differential from port 3 to port 1 of 40-60 psi.


## Specifications

|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | 114 LPM (30 GPM)                                                                                           |
| <b>Maximum Inlet Pressure</b>        | 350 Bar (5000 PSI)                                                                                         |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 350 cc/min (21 in <sup>3</sup> /min) De-Energ. 5.6 LPM (1.5 GPM) Energized Pilot Flow @ 207 Bar (3000 PSI) |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                 | Pull In - 600 ms<br>Drop Out - 130 ms                                                                      |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | .59 kg (1.3 lbs.)                                                                                          |
| <b>Cavity</b>                        | C16-4<br>(See BC Section for more details)                                                                 |
| <b>Form Tool</b>                     | Rougher NFT16-4R<br>Finisher NFT16-4F                                                                      |

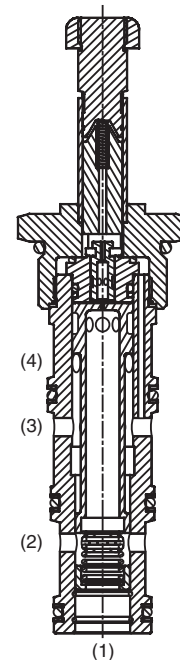


## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

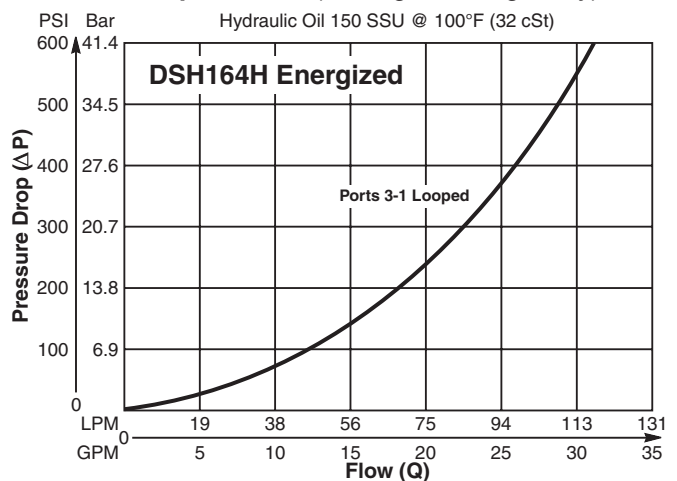

### Pressure Drop vs. Flow (Through cartridge only)

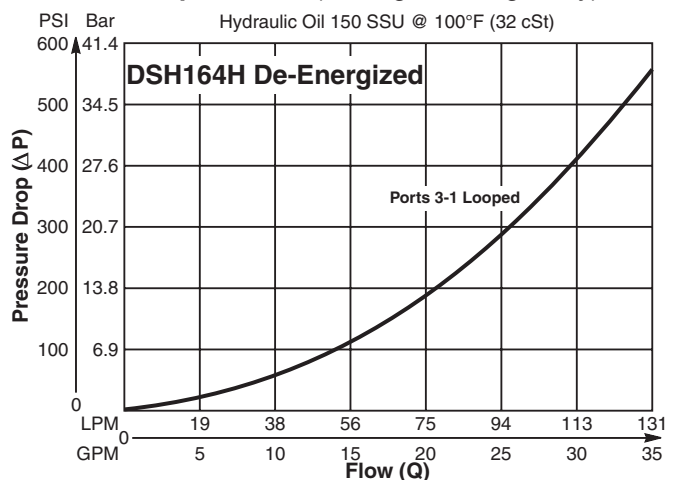

## Dimensions



## Ordering Information

|                                   |              |              |                      |                         |                             |              |   |                          |                      |
|-----------------------------------|--------------|--------------|----------------------|-------------------------|-----------------------------|--------------|---|--------------------------|----------------------|
| <b>DSH164</b>                     | <b>H</b>     |              |                      |                         |                             |              | — |                          |                      |
| <b>16 Size<br/>Solenoid Valve</b> | <b>Style</b> | <b>Seals</b> | <b>Coil<br/>Type</b> | <b>Coil<br/>Voltage</b> | <b>Coil<br/>Termination</b> | <b>Diode</b> |   | <b>Body<br/>Material</b> | <b>Port<br/>Size</b> |

| Code | Style                                                                               |
|------|-------------------------------------------------------------------------------------|
| H    |  |

| Code     | Seals / Kit No.             |
|----------|-----------------------------|
| <b>N</b> | Nitrile / (SK10-4N)         |
| <b>V</b> | Fluorocarbon /<br>(SK10-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 19 Watts |

*\*Recommended*

| Code        | Coil Voltage          |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>D012</b> | 12 VDC                |
| <b>D024</b> | 24 VDC                |
| <b>A120</b> | 120/110 VAC, 60/50 Hz |
| <b>A240</b> | 240/220 VAC, 60/50 Hz |

| SP*<br>Coil | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer†     |
| <b>S</b>    | Dual Spade†        |
| <b>L</b>    | Dual Lead Wire†    |
| <b>LS</b>   | Sealed Lead Wire†  |
| <b>H</b>    | Molded Deutsch†    |

**\*Recommended**  
**†DC Only**

|             |              |
|-------------|--------------|
| <b>Code</b> | <b>Diode</b> |
| <b>Omit</b> | None         |
| <b>R</b>    | Diode        |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

|             |                       |                      |
|-------------|-----------------------|----------------------|
| <b>Code</b> | <b>Port Size</b>      | <b>Body Part No.</b> |
| <b>Omit</b> | <b>Cartridge Only</b> |                      |
| <b>16T</b>  | SAE-16                | (B16-4-*16T)         |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
ControlsFC  
Flow  
ControlsPC  
Pressure  
ControlsLE  
Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description



4-Way, 3 Position, Closed Center Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- Designed to operate double acting cylinders, pilot circuits and bi-directional motors, etc.
- High flow capacity with reduced space requirements
- High pressure capability to 350 Bar (5000 PSI)
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- Manual override available


## Specifications

|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | <b>High Flow/Pressure ('SP' Coil)<br/>17 LPM (4.5 GPM)</b>                                                 |
| <b>Maximum Inlet Pressure</b>        | <b>'SP' Coil 350 Bar (5000 PSI)</b>                                                                        |
| <b>Maximum Tank Pressure</b>         | 210 Bar (3000 PSI)                                                                                         |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | .18 kg (.40 lbs.)                                                                                          |
| <b>Cavity</b>                        | C08-4<br>(See BC Section for more details)                                                                 |

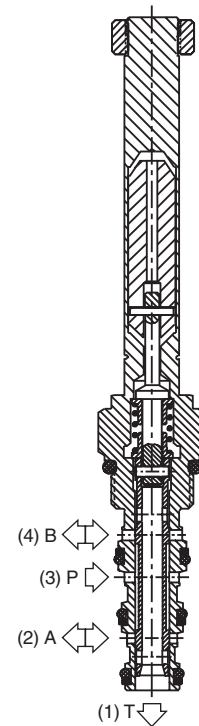


## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

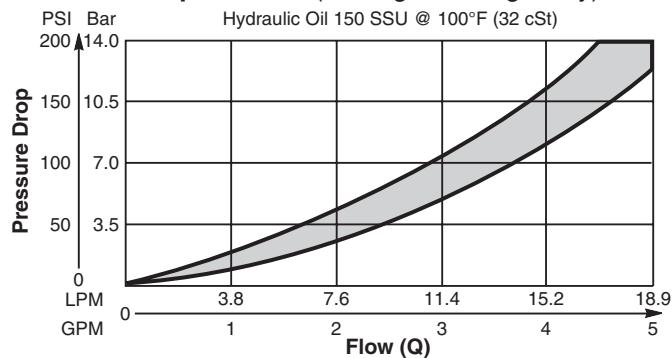

## Operating Limits (Measured at 75% of Nominal Current)

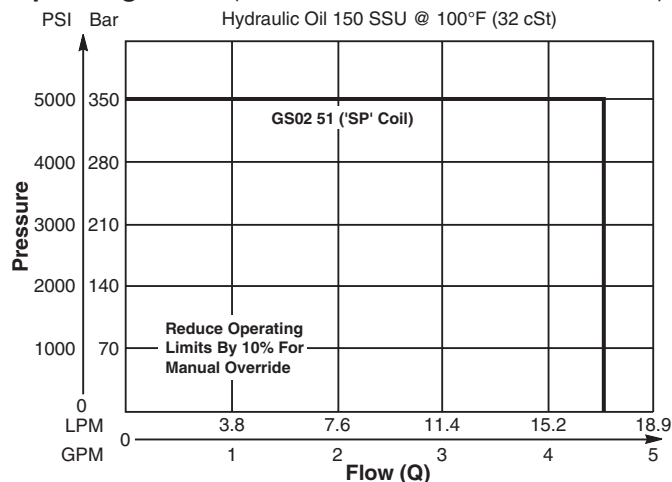

**Dimensions** Millimeters (Inches)

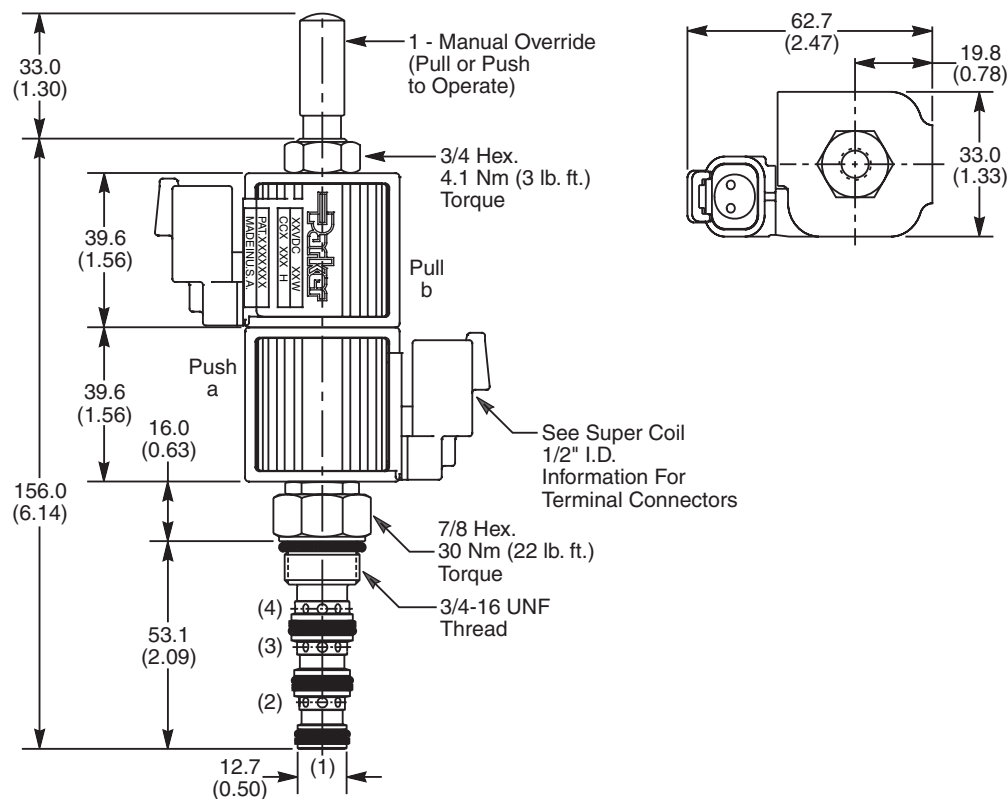

**Ordering Information**

|                        |           |                 |        |       |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>51</b> |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code      | Style                              |
|-----------|------------------------------------|
| <b>51</b> | High Flow and Pressure ('SP' Coil) |

| Code     | Override Options |
|----------|------------------|
| <b>0</b> | Not Required     |
| <b>1</b> | Manual Override  |
| <b>2</b> | Detented M.O.    |

| Code     | Screen        |
|----------|---------------|
| <b>0</b> | Not Available |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30078N-1) |
| <b>V</b> | Fluorocarbon / (SK30078V-1)          |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP</b>   | Super Coil - 19 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>6T</b>   | SAE-6          | (B08-4-*6T)   |
| <b>6B</b>   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
ControlsFC  
Flow  
ControlsPC  
Pressure  
ControlsLE  
Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description



4-Way, 3 Position, Floating Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Designed to operate double acting cylinders, pilot circuits and bi-directional motors, etc.
- High flow capacity with reduced space requirements
- High pressure capability to 350 Bar (5000 PSI)
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- Manual override available


## Specifications

| Rated Flow<br>(At 70 PSI ΔP)  | High Flow/Pressure ('SP' Coil)<br>15 LPM (4.0 GPM)                                                         |
|-------------------------------|------------------------------------------------------------------------------------------------------------|
| Maximum Inlet Pressure        | 'SP' Coil 350 Bar (5000 PSI)                                                                               |
| Maximum Tank Pressure         | 210 Bar (3000 PSI)                                                                                         |
| Cartridge Material            | All parts steel. All operating parts hardened steel.                                                       |
| Operating Temp. Range/Seals   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| Fluid Compatibility/Viscosity | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| Filtration                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| Approx. Weight                | .18 kg (.40 lbs.)                                                                                          |
| Cavity                        | C08-4<br>(See BC Section for more details)                                                                 |

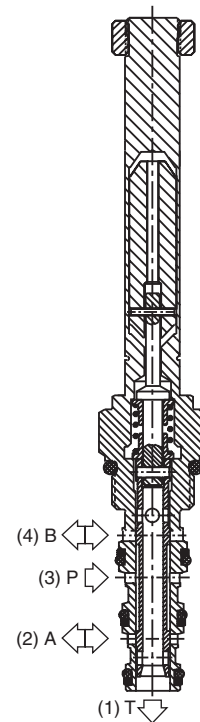


## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

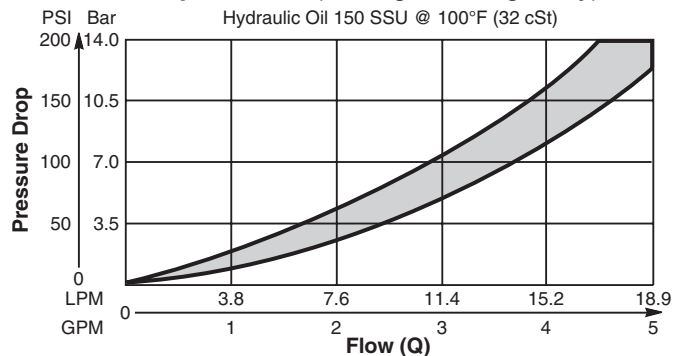

### Operating Limits (Measured at 75% of Nominal Current)

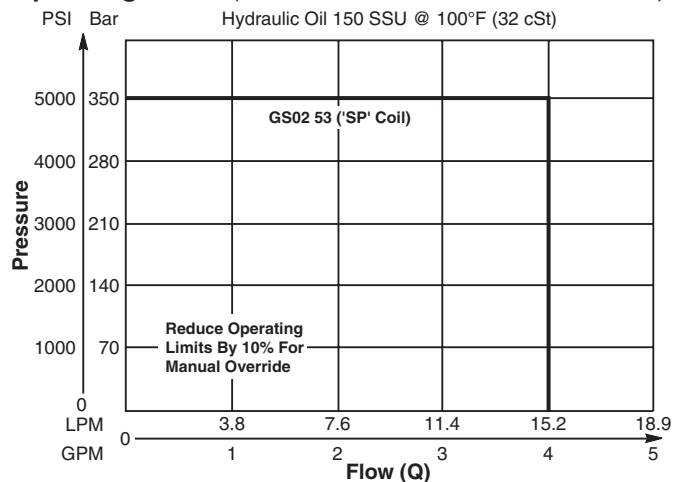

Dimensions    Millimeters (Inches)

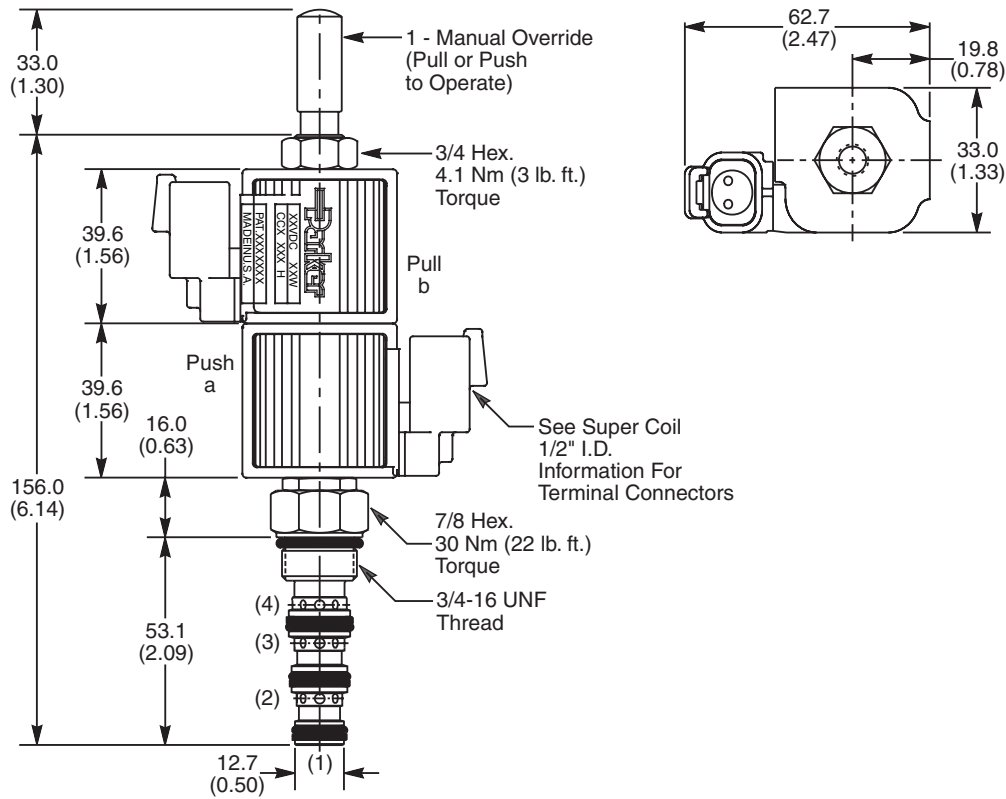

Ordering Information

|                        |           |                 |        |       |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>53</b> |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                              |
|------|------------------------------------|
| 53   | High Flow and Pressure ('SP' Coil) |

| Code | Override Options |
|------|------------------|
| 0    | Not Required     |
| 1    | Manual Override  |
| 2    | Detented M.O.    |

| Code | Screen        |
|------|---------------|
| 0    | Not Available |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30078N-1) |
| V    | Fluorocarbon / (SK30078V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B08-4-*6T)   |
| 6B   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description



4-Way, 3 Position, Tandem Center Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- Designed to operate double acting cylinders, pilot circuits and bi-directional motors, etc.
- High flow capacity with reduced space requirements
- High pressure capability
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- Manual override available


## Specifications

|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | 13.3 LPM (3.5 GPM)                                                                                         |
| <b>Maximum Inlet Pressure</b>        | 350 Bar (5000 PSI)                                                                                         |
| <b>Maximum Tank Pressure</b>         | 210 Bar (3000 PSI)                                                                                         |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                      |
| <b>Approx. Weight</b>                | .18 kg (.40 lbs.)                                                                                          |
| <b>Cavity</b>                        | C08-4<br>(See BC Section for more details)                                                                 |

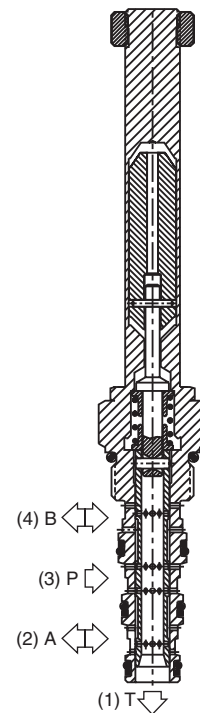


## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

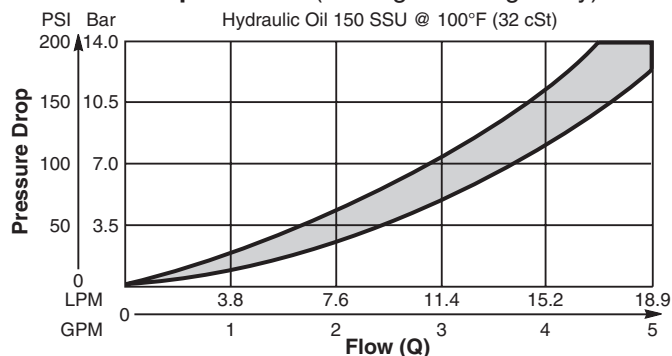

## Operating Limits (Measured at 75% of Nominal Current)

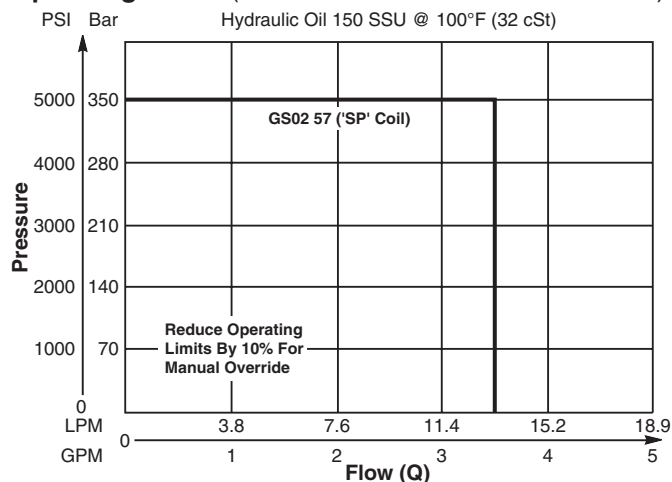

Dimensions    Millimeters (Inches)

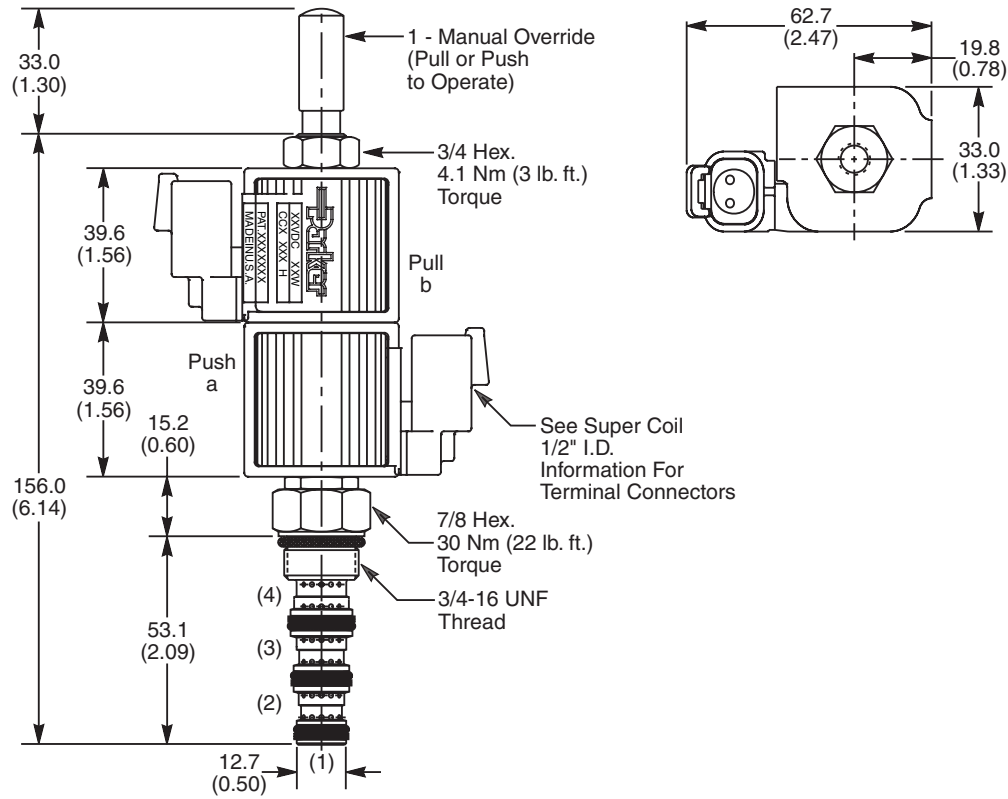

Ordering Information

|                        |           |                 |        |       |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>57</b> |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 57   | High Flow ("SP" Coil) |

| Code | Override Options |
|------|------------------|
| 0    | Not Required     |
| 1    | Manual Override  |
| 2    | Detented M.O.    |

| Code | Screen        |
|------|---------------|
| 0    | Not Available |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30078N-1) |
| V    | Fluorocarbon / (SK30078V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B08-4-*6T)   |
| 6B   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description



4-Way, 3 Position, Open Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Designed to operate double acting cylinders, pilot circuits and bi-directional motors, etc.
- High flow capacity with reduced space requirements
- High pressure capability
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- Manual override available


## Specifications

|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 13.3 LPM (3.5 GPM)                                                                                           |
| <b>Maximum Inlet<br/>Pressure</b>             | 350 Bar (5000 PSI)                                                                                           |
| <b>Maximum Tank<br/>Pressure</b>              | 210 Bar (3000 PSI)                                                                                           |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .18 kg (.40 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C08-4<br>(See BC Section for more details)                                                                   |

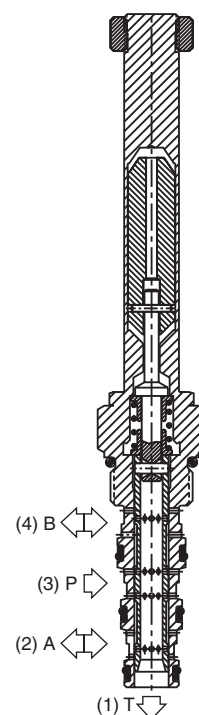


## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

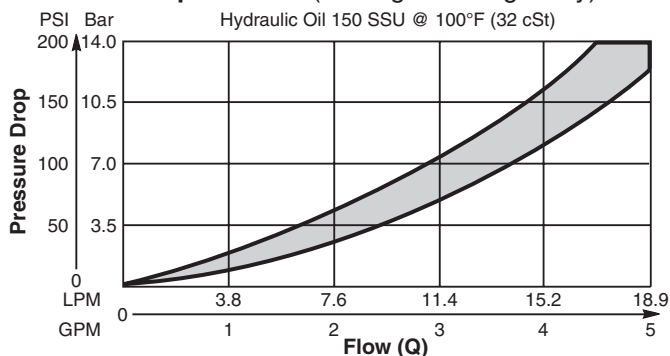

## Operating Limits (Measured at 75% of Nominal Current)

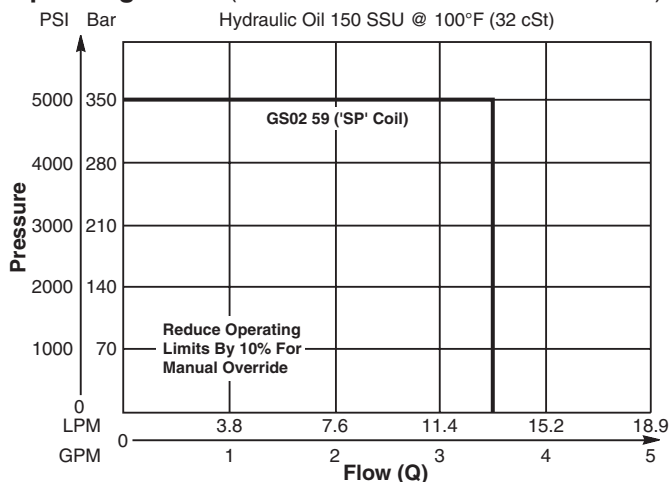

**Dimensions** Millimeters (Inches)

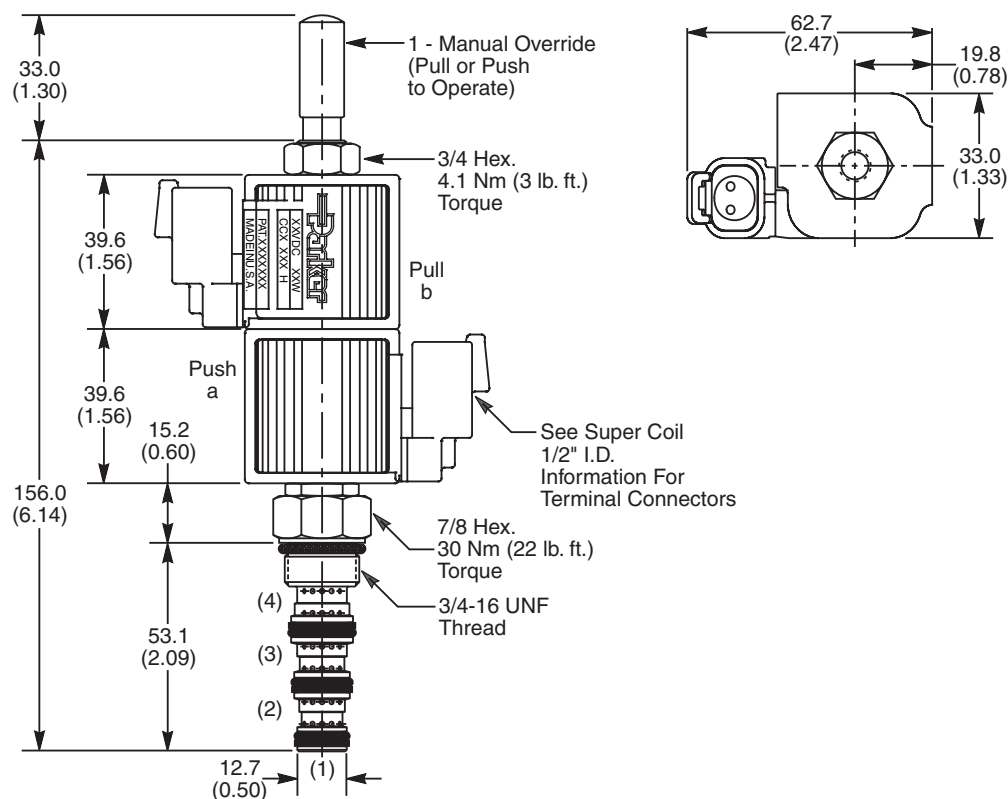

**Ordering Information**

|                        |           |                 |        |       |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>GS02</b>            | <b>59</b> |                 |        |       |           |              |                  |               |           |
| 08 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 59   | High Flow ("SP" Coil) |

| Code | Override Options |
|------|------------------|
| 0    | Not Required     |
| 1    | Manual Override  |
| 2    | Detented M.O.    |

| Code | Screen        |
|------|---------------|
| 0    | Not Available |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30078N-1) |
| V    | Fluorocarbon / (SK30078V-1)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 19 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 1/2" I.D.  
 \*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6T   | SAE-6          | (B08-4-*6T)   |
| 6B   | 3/8" BSPG      | (B08-4-*6B)   |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
Cavities

TD

Technical  
Data

## General Description

4-Way Spool Valves. For additional information see Technical Tips on pages SV1-SV6.



## Features

- High flow capacity with reduced space requirements
- Standard valve bodies and common cavities
- Replaceable, one piece encapsulated coils with minimal amperage draw
- Manual overrides, seal variations and other options available
- Oil immersed armature solenoid, no dynamic seals
- Variety of coil terminations and voltages
- Polyurethane "D"-Ring

## Specifications


|                                      |                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow</b>                    | <b>C2, C7, C9</b><br>18.8 LPM (5 GPM)<br><b>C1, C4</b><br>26.5 LPM (7 GPM)                                  |
| <b>Maximum Inlet Pressure</b>        | 250 Bar (3600 PSI)                                                                                          |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min. (10 in <sup>3</sup> /min.)                                                                      |
| <b>Minimum Operating Voltage</b>     | 85% of rated voltage at 20°C (72°F).                                                                        |
| <b>Response Time</b>                 | 40 - 150 ms                                                                                                 |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                        |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C ("D"-Ring)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)      |
| <b>Filtration</b>                    | ISO Code 16/13, SAE Class 4 or better                                                                       |
| <b>Approx. Weight</b>                | .29 kg (.64 lbs.)                                                                                           |
| <b>Cavity</b>                        | C10-4                                                                                                       |
| <b>Form Tool</b>                     | Rougher    NFT10-4R<br>Finisher    NFT10-4F                                                                 |

## Curve Selection Chart

| SPOOL CODE | SPOOL SHIFTED |        |        |        | SPOOL CENTERED |        |        |
|------------|---------------|--------|--------|--------|----------------|--------|--------|
|            | 3 to 2        | 3 to 4 | 2 to 1 | 4 to 1 | 3 to 1         | 2 to 1 | 4 to 1 |
| C1         | 2             | 2      | 4      | 4      | —              | —      | —      |
| C2         | 1             | 1      | 2      | 2      | 5              | 4      | 3      |
| C4         | 2             | 2      | 5      | 5      | —              | 4      | 4      |
| C7         | 1             | 1      | 2      | 2      | 5              | —      | 3      |
| C9         | 1             | 1      | 2      | 2      | 5              | —      | —      |




DSL105C1




DSL105C1

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

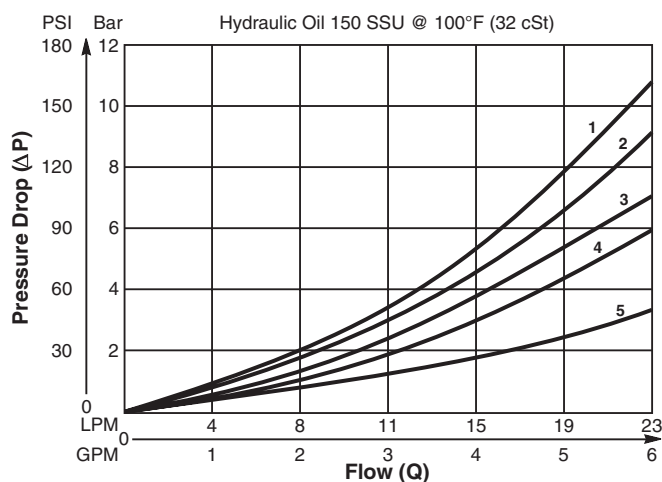

## Shift Limit Characteristics (Min. Operating Voltage)

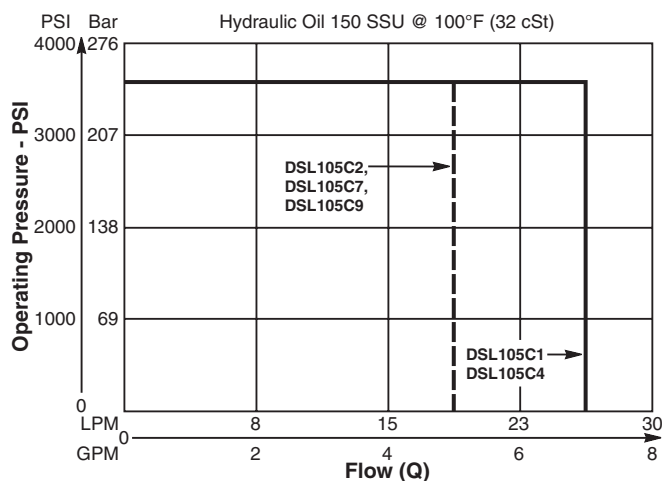

**Dimensions** Millimeters (Inches)

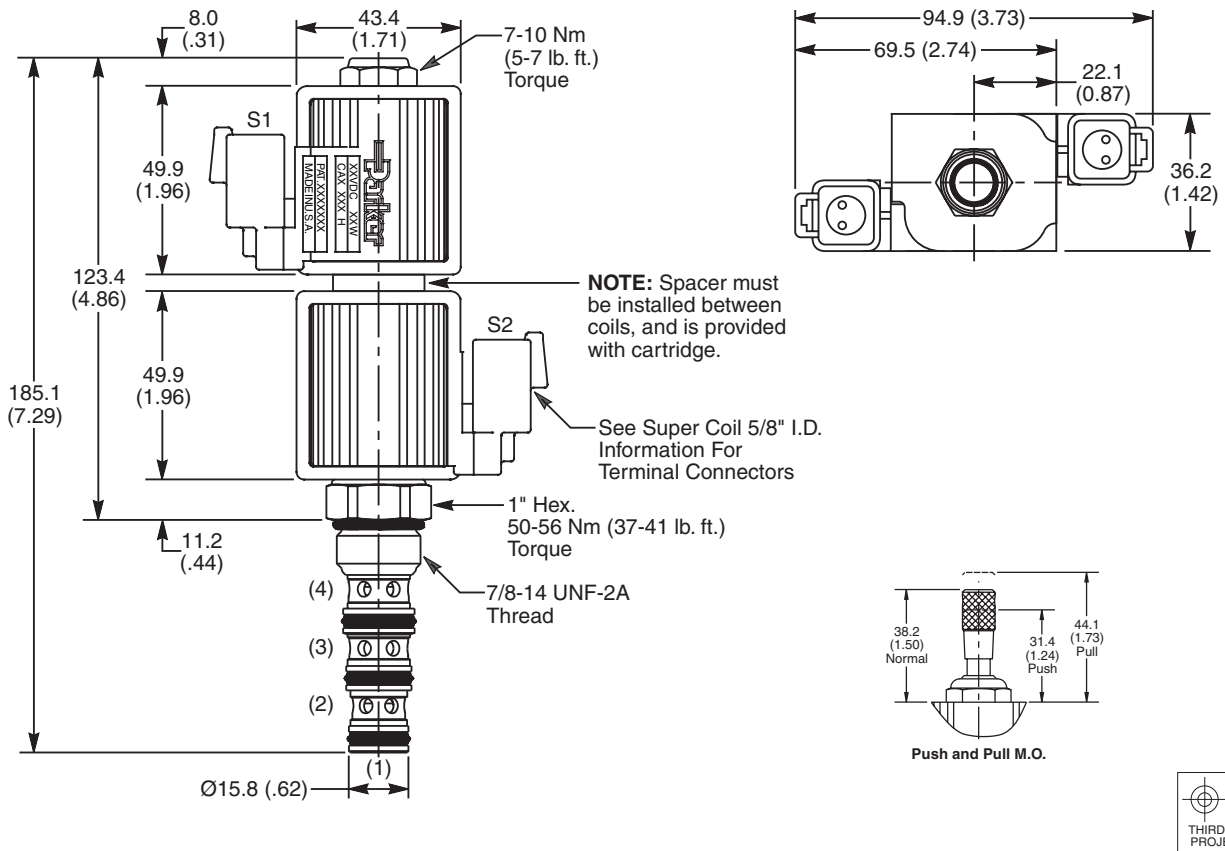

**Ordering Information**

|                        |       |                 |       |           |              |                  |               |           |
|------------------------|-------|-----------------|-------|-----------|--------------|------------------|---------------|-----------|
| <b>DSL105</b>          |       |                 |       |           |              |                  |               |           |
| 10 Size Solenoid Valve | Style | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style |
|------|-------|
| C1   |       |
| C2   |       |
| C4   |       |
| C7   |       |
| C9   |       |

| Code | Override Options |
|------|------------------|
| Omit | None             |
| M    | Push/Pull        |

| Code | Seals / Kit. No.         |
|------|--------------------------|
| Omit | "D"-Ring / (SK10-4)      |
| N    | Nitrile / (SK10-4N)      |
| V    | Fluorocarbon / (SK10-4V) |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP*  | Super Coil - 28 Watts |

*\*Recommended*

| Code | Coil Voltage          |
|------|-----------------------|
| Omit | Without Coil          |
| D012 | 12 VDC                |
| D024 | 24 VDC                |
| A120 | 120/110 VAC, 60/50 Hz |
| A240 | 240/220 VAC, 60/50 Hz |

| SP*  | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer†     |
| S    | Dual Spade†        |
| L    | Dual Lead Wire†    |
| LS   | Sealed Lead Wire†  |
| H    | Molded Deutsch†    |

*\*Recommended  
 †DC Only*

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 6P   | 3/8" NTPF      | (B10-4-*6P)   |
| 6T   | SAE-6          | (B10-4-*6T)   |
| 8T   | SAE-8          | (B10-4-*8T)   |
| 6B   | 3/8" BSPG      | (B10-4-6B)†   |

*\* Add "A" for aluminum, omit for steel.  
 † Steel bodies only*

CV

Check  
Valves

SH



Shuttle  
ValvesLM  
Load/Motor  
ControlsFC  
Flow  
ControlsPC  
Pressure  
ControlsLE  
Logic  
ElementsDC  
Directional  
ControlsMV  
Manual  
ValvesSV  
Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
CavitiesTD  
Technical  
Data

## General Description

4-Way, 3 Position, Closed Center Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- Four way closed center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.

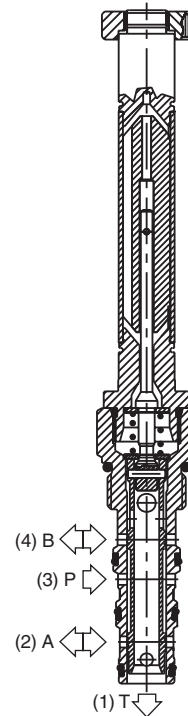


## Specifications


|                                        |                                                                                                            |
|----------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>   | 42 LPM (11 GPM)                                                                                            |
| <b>Maximum Inlet Pressure</b>          | 350 Bar (5000 PSI)                                                                                         |
| <b>Leakage at<br/>150 SSU (32 cSt)</b> | 160 cc/min @ 210 Bar (3000 PSI)                                                                            |
| <b>Minimum Operating Voltage</b>       | 85% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                   | <b>Open</b> 30-60 ms<br><b>Close</b> 20-40 ms                                                              |
| <b>Cartridge Material</b>              | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>     | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/ Viscosity</b>  | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                      | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| <b>Approx. Weight</b>                  | .26 kg (.58 lbs.)                                                                                          |
| <b>Cavity</b>                          | C10-4<br>(See BC Section for more details)                                                                 |

## Performance Curves


### Pressure Drop vs. Flow Energized - GS045250ND (Through cartridge only)

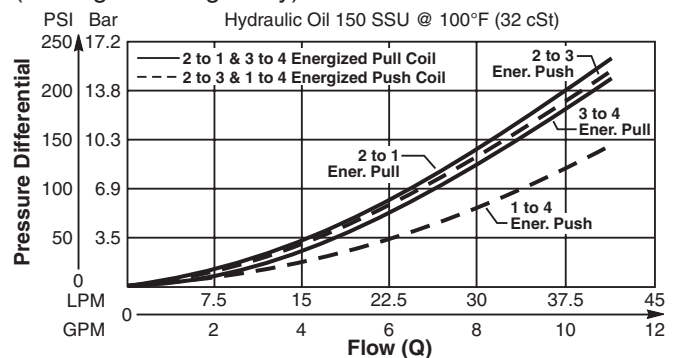

### Operating Limits (Measured at 75% of Nominal Current)

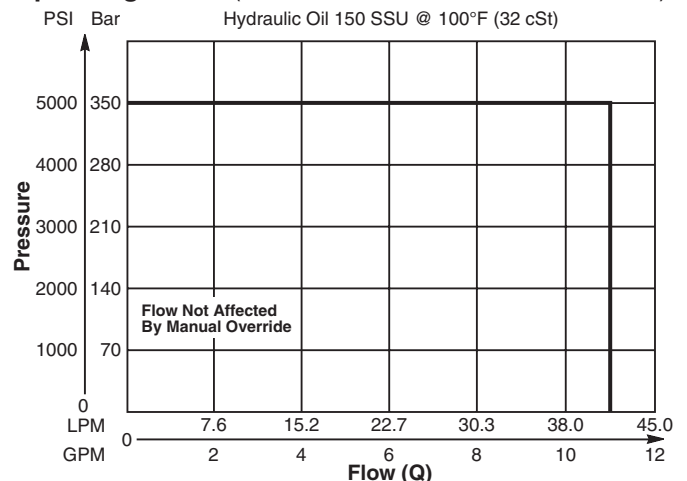

Dimensions    Millimeters (Inches)

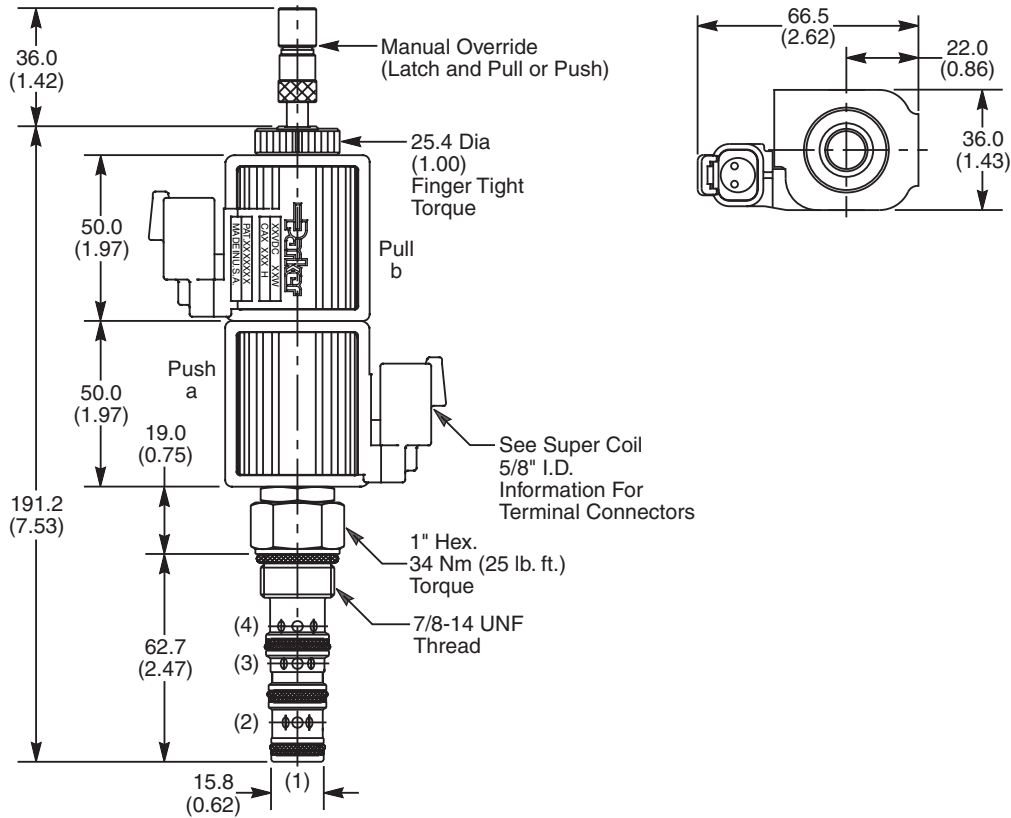

Ordering Information

|                        |           |                 |        |       |              |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|--------------|-----------|--------------|------------------|---------------|-----------|
| <b>GS04</b>            | <b>52</b> |                 |        |       | <b>D</b>     |           |              |                  |               |           |
| 10 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Design Level | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code      | Style                              |
|-----------|------------------------------------|
| <b>52</b> | High Flow and Pressure ('SP' Coil) |

| Code     | Override Options                                         |
|----------|----------------------------------------------------------|
| <b>0</b> | None                                                     |
| <b>5</b> | Standard - Latch Operated, Pull and Push (*40 nt/9 lbs.) |

\*Force to push at 210 Bar (3000 PSI). Less to Pull.

| Code     | Screen                                      |
|----------|---------------------------------------------|
| <b>0</b> | None (Contact factory for OEM requirements) |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30506N-1) |
| <b>V</b> | Fluorocarbon / (SK30506V-1)          |

| Code     | Design Level                    |
|----------|---------------------------------|
| <b>D</b> | Includes Industry Common Cavity |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP</b>   | Super Coil - 28 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

See Super Coil 5/8" I.D.  
\*DC Only

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>8T</b>   | SAE-8          | (B10-4-*8T)   |
| <b>8B</b>   | 1/2" BSPG      | (B10-4-*8B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description



4-Way, 3 Position, Floating Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features


- Four way floating center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.

## Specifications


|                                                         |                                                                                                              |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI <math>\Delta P</math>)</b> | 42 LPM (11 GPM)                                                                                              |
| <b>Maximum Inlet Pressure</b>                           | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>                  | 160 cc/min @ 210 Bar (3000 PSI)                                                                              |
| <b>Minimum<br/>Operating Voltage</b>                    | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                                    | <b>Open</b> 30-60 ms<br><b>Close</b> 20-40 ms                                                                |
| <b>Cartridge Material</b>                               | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>                  | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b>           | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                                       | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                                   | .26 kg (.58 lbs.)                                                                                            |
| <b>Cavity</b>                                           | C10-4<br>(See BC Section for more details)                                                                   |

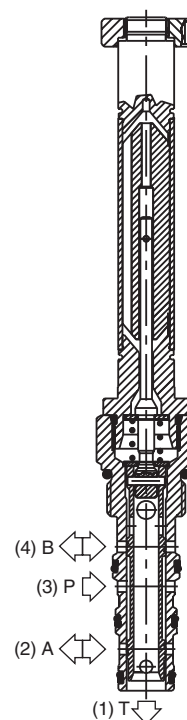


## Performance Curves

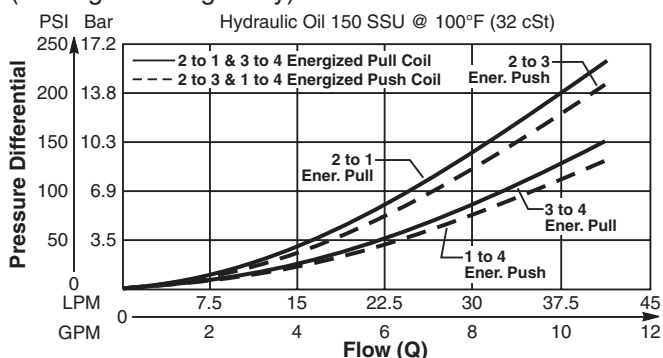Pressure Drop vs. Flow Energized - GS045450ND  
(Through cartridge only)

## Operating Limits (Measured at 75% of Nominal Current)

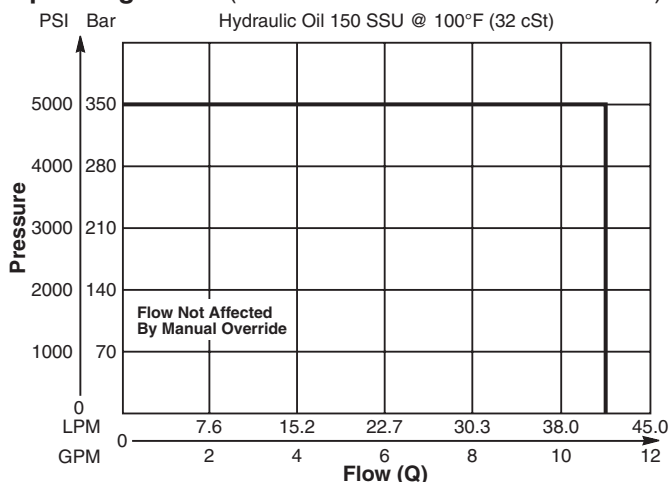

Dimensions    Millimeters (Inches)

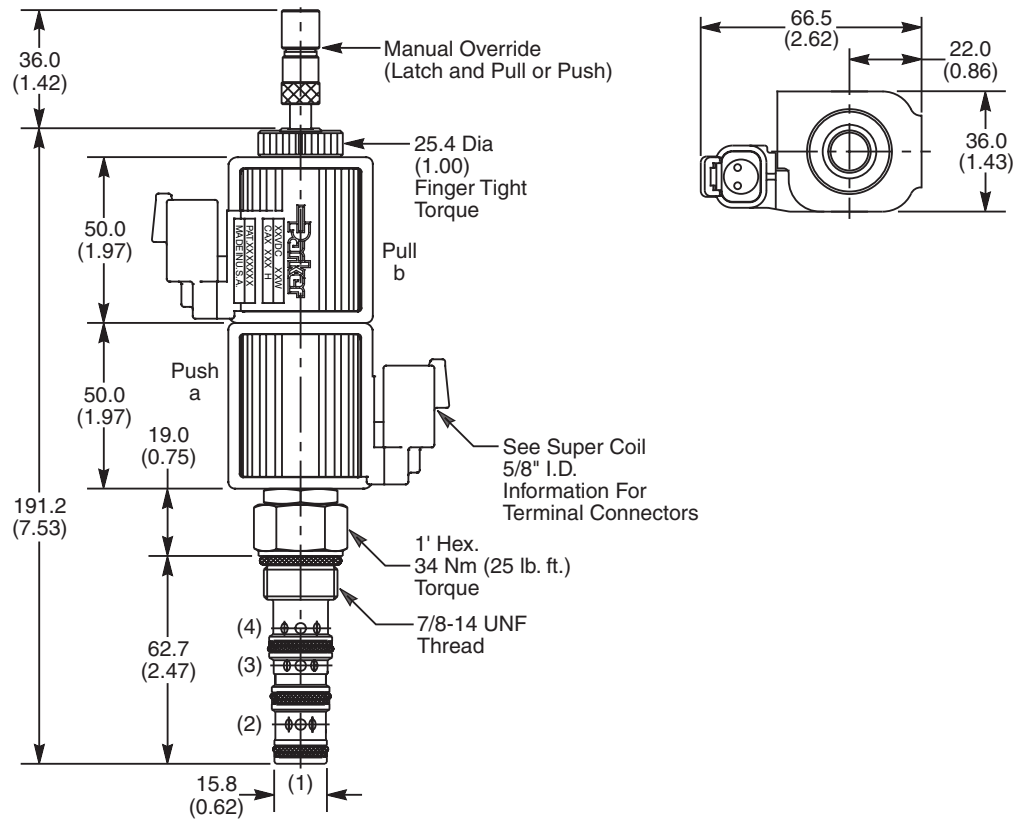

Ordering Information

|                        |           |                 |        |       |              |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|--------------|-----------|--------------|------------------|---------------|-----------|
| <b>GS04</b>            | <b>54</b> |                 |        |       | <b>D</b>     |           |              |                  |               |           |
| 10 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Design Level | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code      | Style                              |
|-----------|------------------------------------|
| <b>54</b> | High Flow and Pressure ('SP' Coil) |

| Code     | Override Options                                         |
|----------|----------------------------------------------------------|
| <b>0</b> | None                                                     |
| <b>5</b> | Standard - Latch Operated, Pull and Push (*40 nt/9 lbs.) |

\*Force to push at 210 Bar (3000 PSI). Less to Pull.

| Code     | Screen                                      |
|----------|---------------------------------------------|
| <b>0</b> | None (Contact factory for OEM requirements) |

| Code     | Seals / Kit No.                      |
|----------|--------------------------------------|
| <b>N</b> | Nitrile / Buna-N (Std.) (SK30506N-1) |
| <b>V</b> | Fluorocarbon / (SK30506V-1)          |

| Code     | Design Level                    |
|----------|---------------------------------|
| <b>D</b> | Includes Industry Common Cavity |

| Code        | Coil Type             |
|-------------|-----------------------|
| <b>Omit</b> | Without Coil          |
| <b>SP</b>   | Super Coil - 28 Watts |

| Code        | Coil Voltage       |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>D012</b> | 12 VDC             |
| <b>D024</b> | 24 VDC             |
| <b>A120</b> | 120 VAC, 60/50 Hz  |
| <b>A240</b> | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code        | Coil Termination   |
|-------------|--------------------|
| <b>Omit</b> | Without Coil       |
| <b>C</b>    | Conduit With Leads |
| <b>D</b>    | DIN Plug Face      |
| <b>A</b>    | Amp Jr. Timer*     |
| <b>S</b>    | Dual Spade*        |
| <b>L</b>    | Dual Lead Wire*    |
| <b>LS</b>   | Sealed Lead Wire*  |
| <b>H</b>    | Molded Deutsch*    |

See Super Coil 5/8" I.D.  
\*DC Only

| Code        | Body Material |
|-------------|---------------|
| <b>Omit</b> | Steel         |
| <b>A</b>    | Aluminum      |

| Code        | Port Size      | Body Part No. |
|-------------|----------------|---------------|
| <b>Omit</b> | Cartridge Only |               |
| <b>8T</b>   | SAE-8          | (B10-4-*8T)   |
| <b>8B</b>   | 1/2" BSPG      | (B10-4-*8B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD

Technical  
Data

## General Description



4-Way, 3 Position, Tandem Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Four way tandem center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.


## Specifications

|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 42 LPM (11 GPM)                                                                                              |
| <b>Maximum Inlet<br/>Pressure</b>             | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 160 cc/min @ 210 Bar (3000 PSI)                                                                              |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | <b>Open</b> 30-60 ms<br><b>Close</b> 20-40 ms                                                                |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .26 kg (.58 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C10-4<br>(See BC Section for more details)                                                                   |

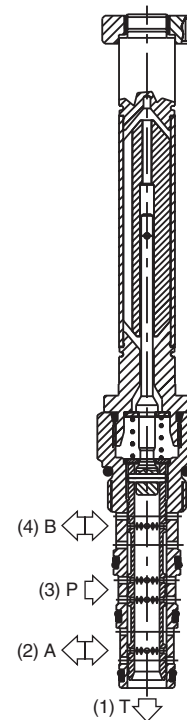


## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

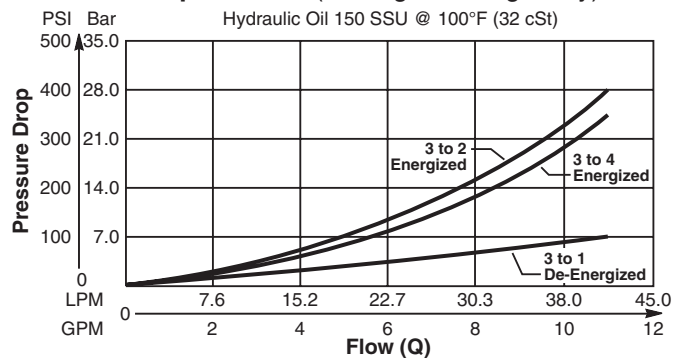

## Operating Limits (Measured at 75% of Nominal Current)

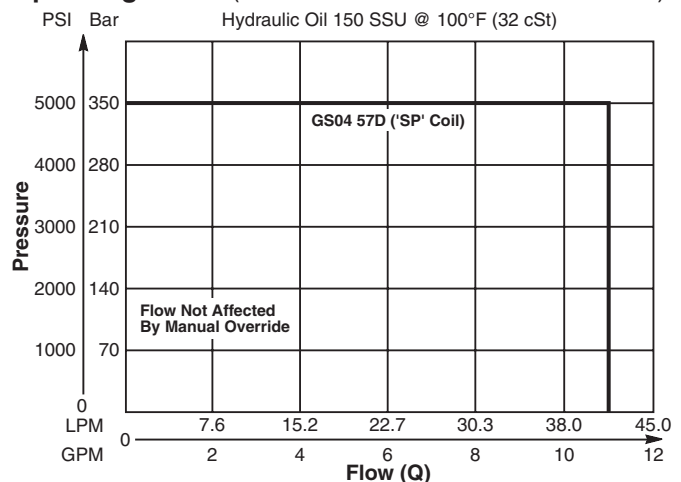

Dimensions    Millimeters (Inches)

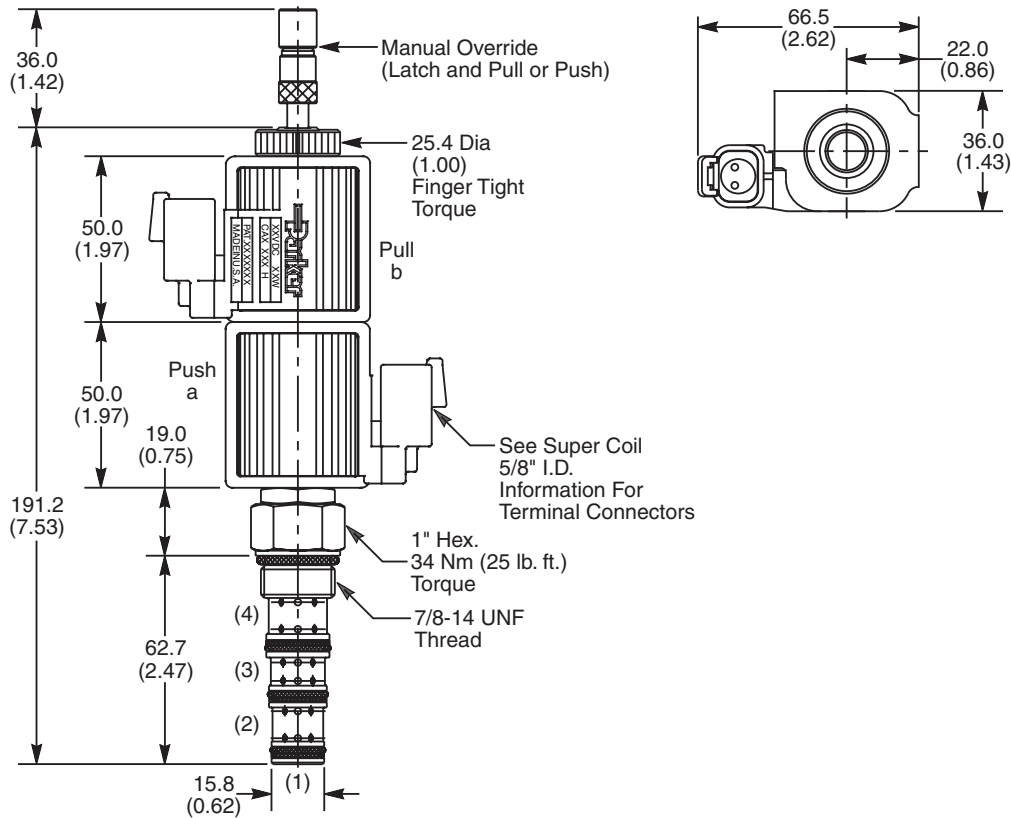

Ordering Information

|                        |           |                 |        |       |              |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|--------------|-----------|--------------|------------------|---------------|-----------|
| <b>GS04</b>            | <b>57</b> |                 |        |       | <b>D</b>     |           |              |                  |               |           |
| 10 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Design Level | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                              |
|------|------------------------------------|
| 57   | High Flow and Pressure ('SP' Coil) |

| Code | Override Options                                         |
|------|----------------------------------------------------------|
| 0    | None                                                     |
| 5    | Standard - Latch Operated, Pull and Push (*40 nt/9 lbs.) |

\*Force to push at 210 Bar (3000 PSI). Less to Pull.

| Code | Screen                                      |
|------|---------------------------------------------|
| 0    | None (Contact factory for OEM requirements) |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30506N-1) |
| V    | Fluorocarbon / (SK30506V-1)          |

| Code | Design Level                    |
|------|---------------------------------|
| D    | Includes Industry Common Cavity |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 8T   | SAE-8          | (B10-4-*8T)   |
| 8B   | 1/2" BSPG      | (B10-4-*8B)   |

\* Add "A" for aluminum, omit for steel.

## Technical Information

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD



Technical  
Data

## General Description

4-Way, 3 Position, Open Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Four way open center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.

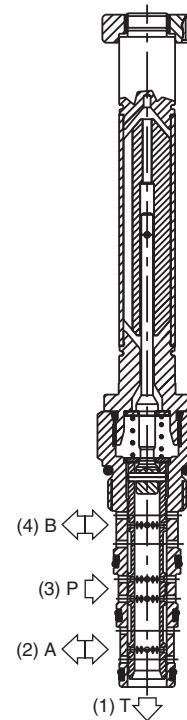


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 42 LPM (11 GPM)                                                                                              |
| <b>Maximum Inlet<br/>Pressure</b>             | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 160 cc/min @ 210 Bar (3000 PSI)                                                                              |
| <b>Minimum<br/>Operating Voltage</b>          | 85% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | <b>Open</b> 30-60 ms<br><b>Close</b> 20-40 ms                                                                |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -40°C to +93.3°C (Nitrile)<br>(-40°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .26 kg (.58 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C10-4<br>(See BC Section for more details)                                                                   |

## Performance Curves


## Pressure Drop vs. Flow (Through cartridge only)

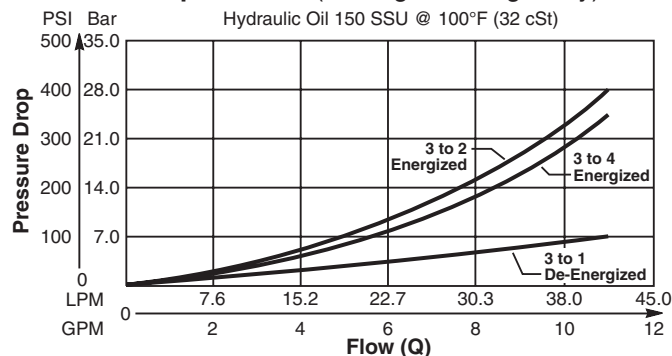

## Operating Limits (Measured at 75% of Nominal Current)

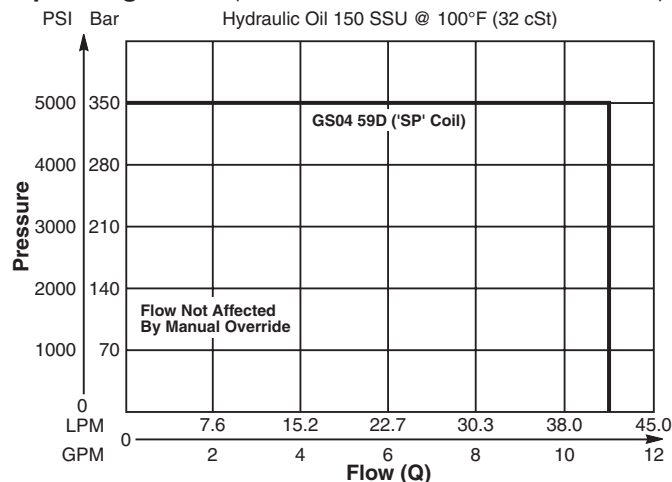

Dimensions    Millimeters (Inches)

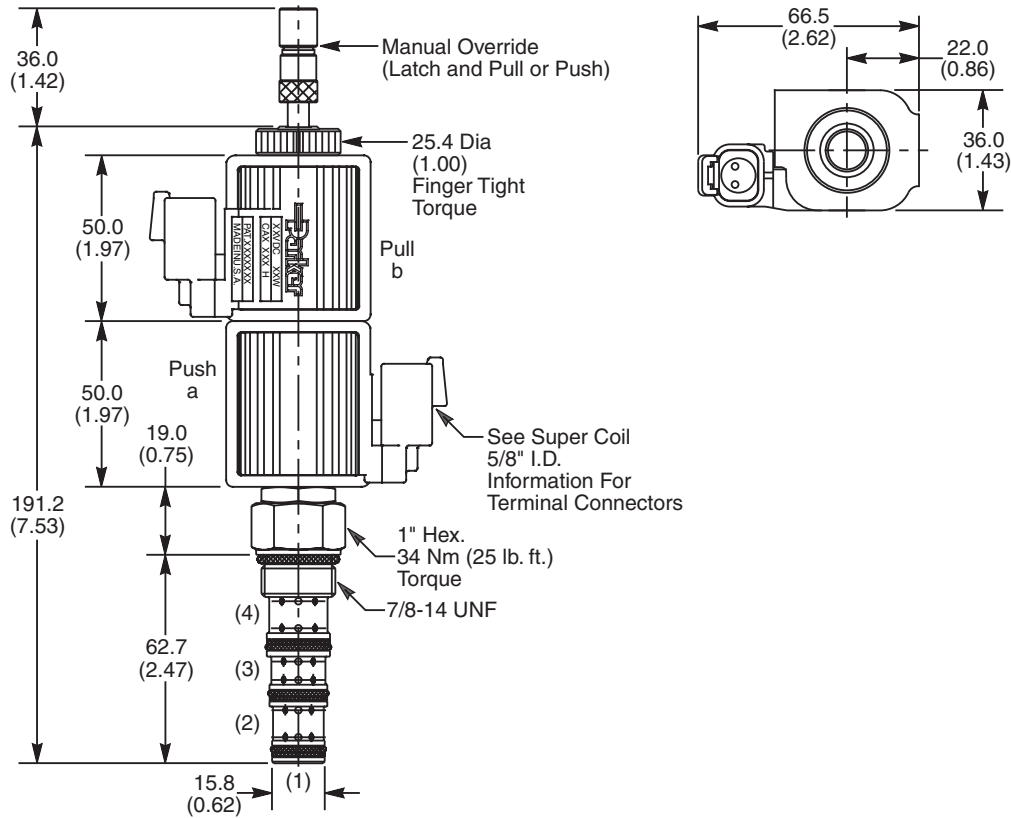

Ordering Information

|                        |           |                 |        |       |              |           |              |                  |               |           |
|------------------------|-----------|-----------------|--------|-------|--------------|-----------|--------------|------------------|---------------|-----------|
| <b>GS04</b>            | <b>59</b> |                 |        |       | <b>D</b>     |           |              |                  |               |           |
| 10 Size Solenoid Valve | Style     | Override Option | Screen | Seals | Design Level | Coil Type | Coil Voltage | Coil Termination | Body Material | Port Size |

| Code | Style                              |
|------|------------------------------------|
| 59   | High Flow and Pressure ('SP' Coil) |

| Code | Override Options                                         |
|------|----------------------------------------------------------|
| 0    | None                                                     |
| 5    | Standard - Latch Operated, Pull and Push (*40 nt/9 lbs.) |

\*Force to push at 210 Bar (3000 PSI). Less to Pull.

| Code | Screen                                      |
|------|---------------------------------------------|
| 0    | None (Contact factory for OEM requirements) |

| Code | Seals / Kit No.                      |
|------|--------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK30506N-1) |
| V    | Fluorocarbon / (SK30506V-1)          |

| Code | Design Level                    |
|------|---------------------------------|
| D    | Includes Industry Common Cavity |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| A    | Amp Jr. Timer*     |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.  
\*DC Only

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 8T   | SAE-8          | (B10-4-*8T)   |
| 8B   | 1/2" BSPG      | (B10-4-*8B)   |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
Valves

LM

Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

4-Way, 3 Position, Closed Center Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- Four way closed center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- All external parts zinc plated

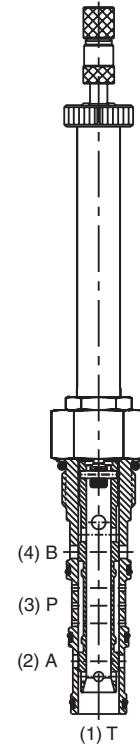


## Specifications


|                                       |                                                                                                            |
|---------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>  | 57 LPM (15 GPM)                                                                                            |
| <b>Maximum Inlet Pressure</b>         | 350 Bar (5000 PSI)                                                                                         |
| <b>Leakage at 150 SSU (32 cSt)</b>    | 160 cc/min @ 210 Bar (3000 PSI)                                                                            |
| <b>Minimum Operating Voltage</b>      | 75% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                  | <b>Energized</b> 30-60 ms<br><b>De-Energized</b> 20-40 ms                                                  |
| <b>Cartridge Material</b>             | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>    | -45°C to +93.3°C (Nitrile)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/ Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                     | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| <b>Approx. Weight</b>                 | .45 kg (1.0 lbs.)                                                                                          |
| <b>Cavity</b>                         | C12-4L<br>(See BC Section for more details)                                                                |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

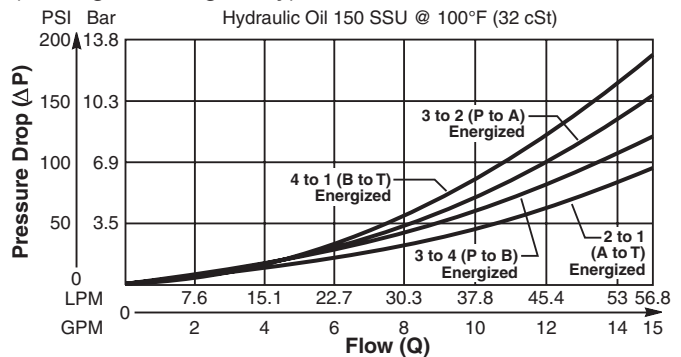

### Shift Limit Characteristics (Min. Operating Voltage)

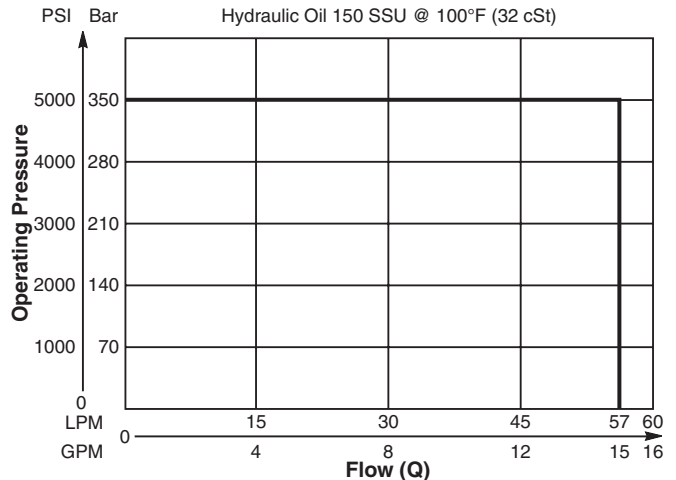

Dimensions    Millimeters (Inches)

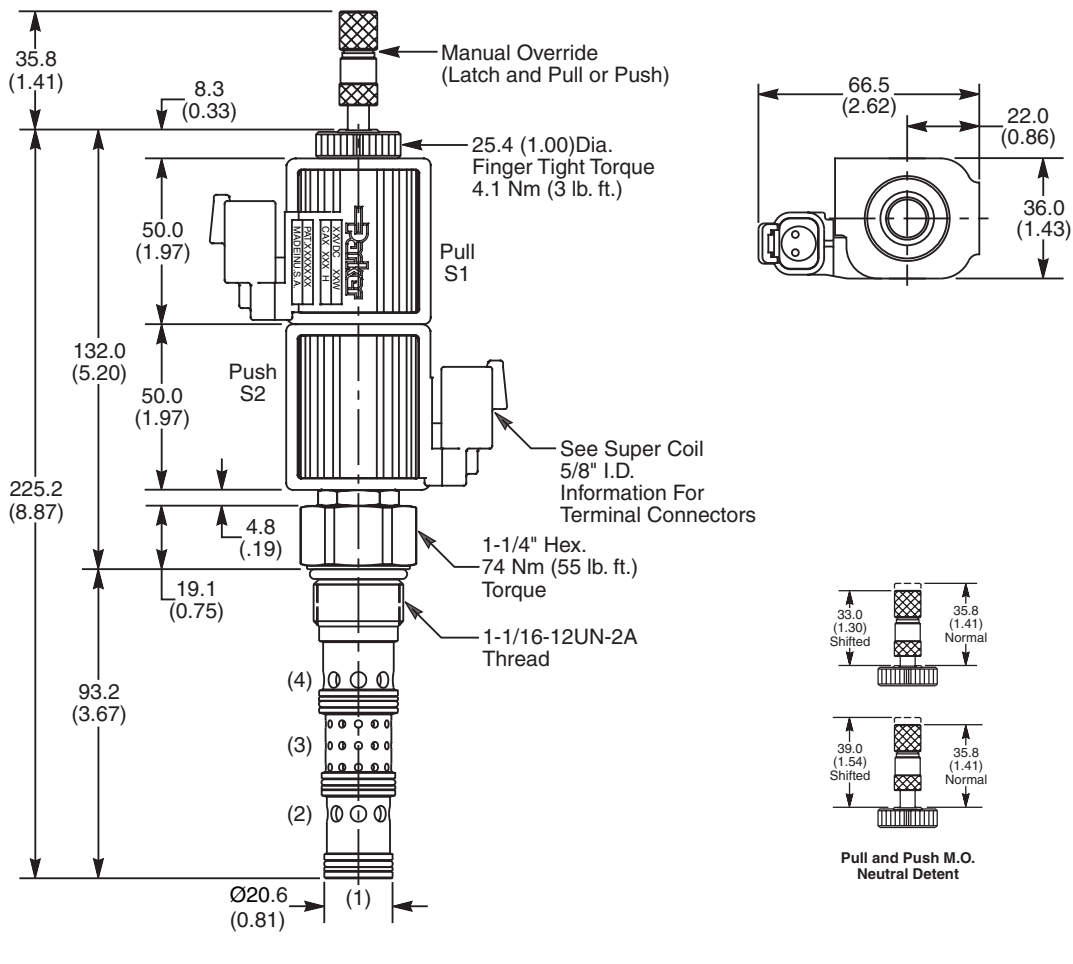

Ordering Information

|                        |           |                 |       |           |              |                  |       |               |           |
|------------------------|-----------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH125</b>          | <b>52</b> |                 |       |           |              |                  |       |               |           |
| 12 Size Solenoid Valve | Style     | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 52   | High Flow ("SP" Coil) |

| Code | Override Options       |
|------|------------------------|
| Omit | None (Consult Factory) |
| DN   | Latch Operated**       |

\*\*40 nt/9 lbs.

| Code | Seals / Kit No.                    |
|------|------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK12-4LN) |
| V    | Fluorocarbon / (SK12-4LV)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.

\*DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 12T  | SAE-12         | (B12-4L-*12T) |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

4-Way, 3 Position, Floating Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Four way floating center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- All external parts zinc plated

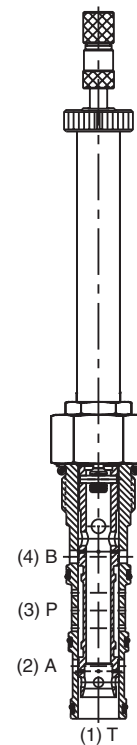


## Specifications


|                                        |                                                                                                            |
|----------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>   | 57 LPM (15 GPM)                                                                                            |
| <b>Maximum Inlet Pressure</b>          | 350 Bar (5000 PSI)                                                                                         |
| <b>Leakage at<br/>150 SSU (32 cSt)</b> | 160 cc/min @ 210 Bar (3000 PSI)                                                                            |
| <b>Minimum Operating Voltage</b>       | 75% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                   | <b>Energized</b> 30-60 ms<br><b>De-Energized</b> 20-40 ms                                                  |
| <b>Cartridge Material</b>              | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>     | -45°C to +93.3°C (Nitrile)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/ Viscosity</b>  | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                      | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| <b>Approx. Weight</b>                  | .45 kg (1.0 lbs.)                                                                                          |
| <b>Cavity</b>                          | C12-4L<br>(See BC Section for more details)                                                                |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

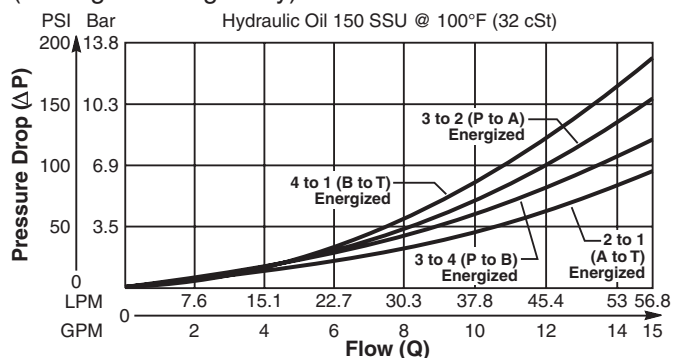

### Shift Limit Characteristics (Min. Operating Voltage)

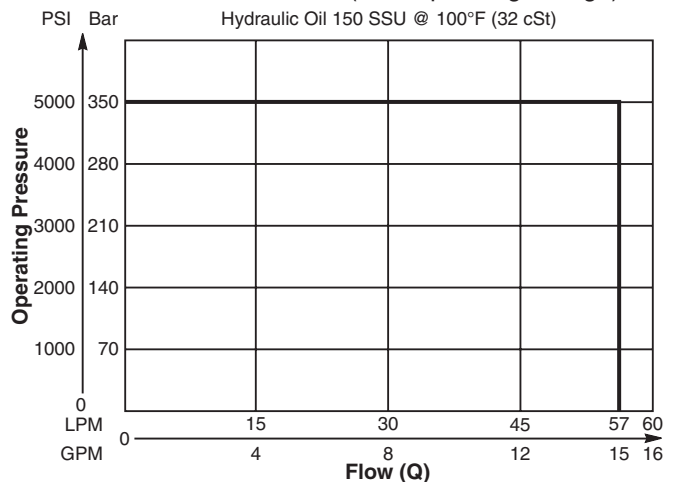

Dimensions    Millimeters (Inches)

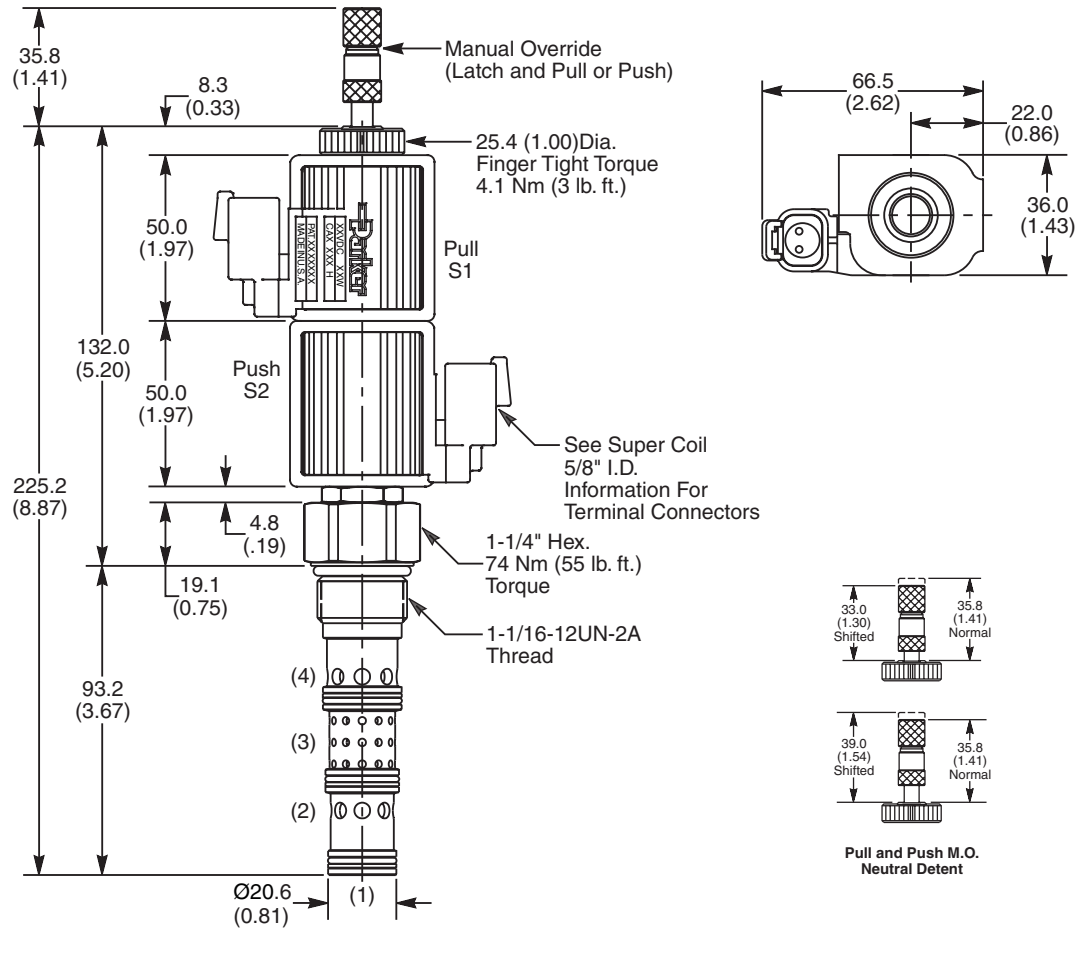

Ordering Information

|                        |           |                 |       |           |              |                  |       |               |           |
|------------------------|-----------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH125</b>          | <b>54</b> |                 |       |           |              |                  |       |               |           |
| 12 Size Solenoid Valve | Style     | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 54   | High Flow ("SP" Coil) |

| Code | Override Options       |
|------|------------------------|
| Omit | None (Consult Factory) |
| DN   | Latch Operated**       |

\*\*40 nt/9 lbs.

| Code | Seals / Kit No.                    |
|------|------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK12-4LN) |
| V    | Fluorocarbon / (SK12-4LV)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.

\*DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 12T  | SAE-12         | (B12-4L-*12T) |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

4-Way, 3 Position, Tandem Center Spool Valve.  
For additional information see Technical Tips on  
pages SV1-SV6.

## Features

- Four way tandem center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- All external parts zinc plated

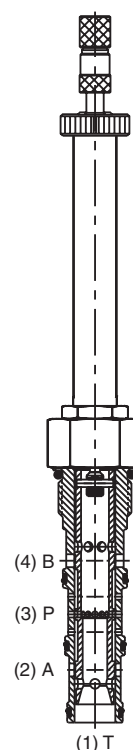


## Specifications


|                                               |                                                                                                              |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b>          | 57 LPM (15 GPM)                                                                                              |
| <b>Maximum Inlet Pressure</b>                 | 350 Bar (5000 PSI)                                                                                           |
| <b>Leakage at<br/>150 SSU (32 cSt)</b>        | 160 cc/min @ 210 Bar (3000 PSI)                                                                              |
| <b>Minimum<br/>Operating Voltage</b>          | 75% of rated voltage at<br>20°C (72°F).                                                                      |
| <b>Response Time</b>                          | <b>Energized</b> 30-60 ms<br><b>De-Energized</b> 20-40 ms                                                    |
| <b>Cartridge Material</b>                     | All parts steel. All operating<br>parts hardened steel.                                                      |
| <b>Operating Temp.<br/>Range/Seals</b>        | -45°C to +93.3°C (Nitrile)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F)   |
| <b>Fluid<br/>Compatibility/<br/>Viscosity</b> | Mineral-based or synthetic with<br>lubricating properties at viscosities<br>of 45 to 2000 SSU (6 to 420 cSt) |
| <b>Filtration</b>                             | ISO Code 16/13,<br>SAE Class 4 or better                                                                     |
| <b>Approx. Weight</b>                         | .45 kg (1.0 lbs.)                                                                                            |
| <b>Cavity</b>                                 | C12-4L<br>(See BC Section for more details)                                                                  |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

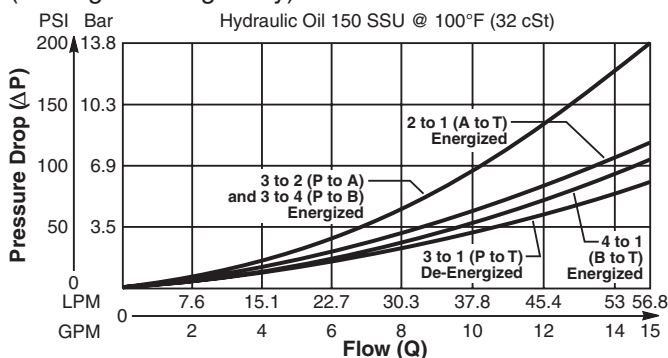

### Shift Limit Characteristics (Min. Operating Voltage)

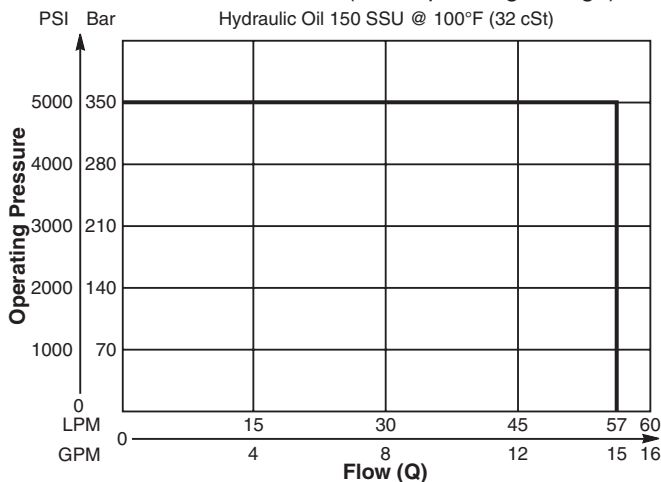

Dimensions    Millimeters (Inches)

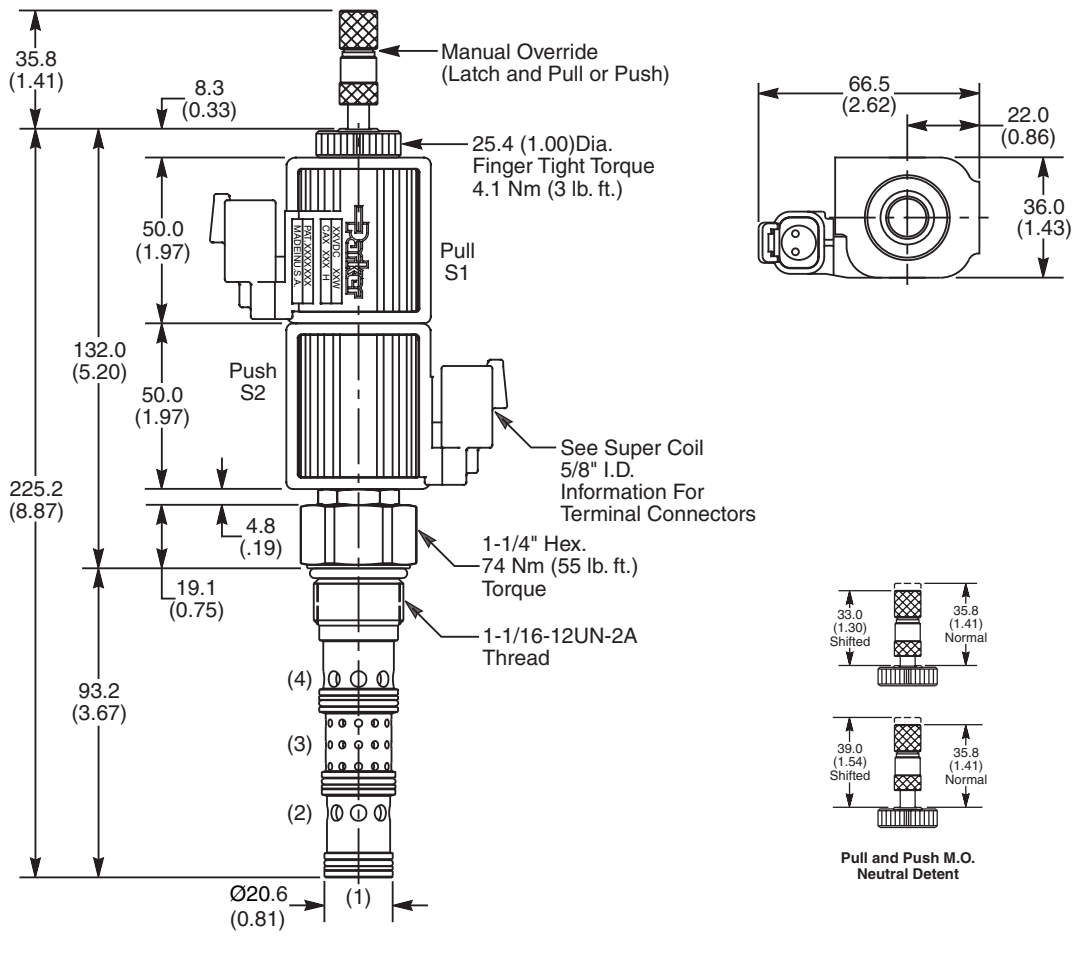

Ordering Information

|                        |           |                 |       |           |              |                  |       |               |           |
|------------------------|-----------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH125</b>          | <b>57</b> |                 |       |           |              |                  |       |               |           |
| 12 Size Solenoid Valve | Style     | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 57   | High Flow ("SP" Coil) |

| Code | Override Options       |
|------|------------------------|
| Omit | None (Consult Factory) |
| DN   | Latch Operated**       |

\*\*40 nt/9 lbs.

| Code | Seals / Kit No.                    |
|------|------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK12-4LN) |
| V    | Fluorocarbon / (SK12-4LV)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.

\*DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 12T  | SAE-12         | (B12-4L-*12T) |

\* Add "A" for aluminum, omit for steel.

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
Elements

DC

Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
Valves

PV

Proportional  
Valves

CE

Coils &  
Electronics

BC

Bodies &  
Cavities

TD




Technical  
Data

## General Description

4-Way, 3 Position, Open Center Spool Valve.  
For additional information see Technical Tips on pages SV1-SV6.

## Features

- Four way open center valve designed to operate double acting cylinders and bi-directional motors, etc.
- One piece cartridge housing ensures internal concentricity
- Coil: Waterproof, hermetically sealed, requires no O'Rings; Symmetrical coil can be reversed without affecting performance.
- All external parts zinc plated

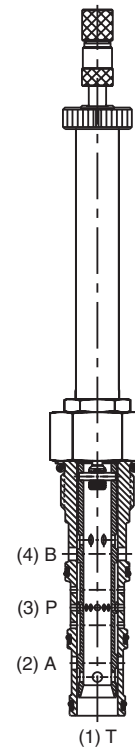


## Specifications


|                                      |                                                                                                            |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Rated Flow<br/>(At 70 PSI ΔP)</b> | 57 LPM (15 GPM)                                                                                            |
| <b>Maximum Inlet Pressure</b>        | 350 Bar (5000 PSI)                                                                                         |
| <b>Leakage at 150 SSU (32 cSt)</b>   | 160 cc/min @ 210 Bar (3000 PSI)                                                                            |
| <b>Minimum Operating Voltage</b>     | 75% of rated voltage at 20°C (72°F).                                                                       |
| <b>Response Time</b>                 | <b>Energized</b> 30-60 ms<br><b>De-Energized</b> 20-40 ms                                                  |
| <b>Cartridge Material</b>            | All parts steel. All operating parts hardened steel.                                                       |
| <b>Operating Temp. Range/Seals</b>   | -45°C to +93.3°C (Nitrile)<br>(-50°F to +200°F)<br>-31.7°C to +121.1°C (Fluorocarbon)<br>(-25°F to +250°F) |
| <b>Fluid Compatibility/Viscosity</b> | Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)     |
| <b>Filtration</b>                    | ISO Code 16/13,<br>SAE Class 4 or better                                                                   |
| <b>Approx. Weight</b>                | .45 kg (1.0 lbs.)                                                                                          |
| <b>Cavity</b>                        | C12-4L<br>(See BC Section for more details)                                                                |

## Performance Curves


### Pressure Drop vs. Flow (Through cartridge only)

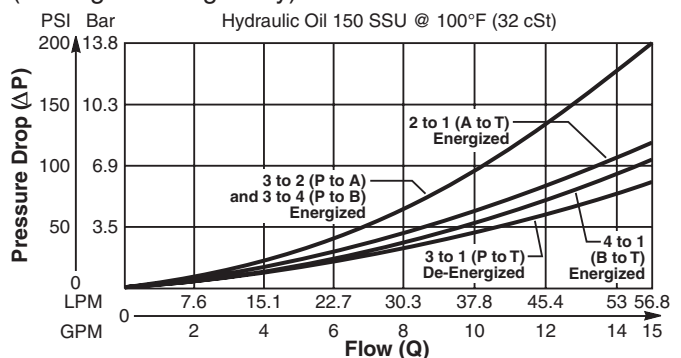

### Shift Limit Characteristics (Min. Operating Voltage)

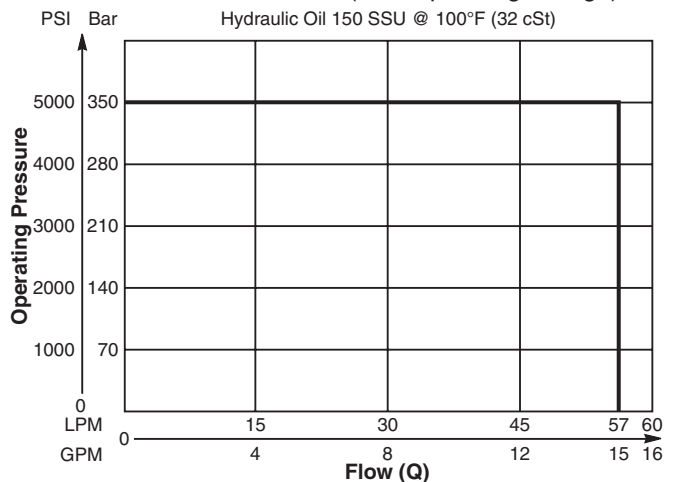

**Dimensions** Millimeters (Inches)

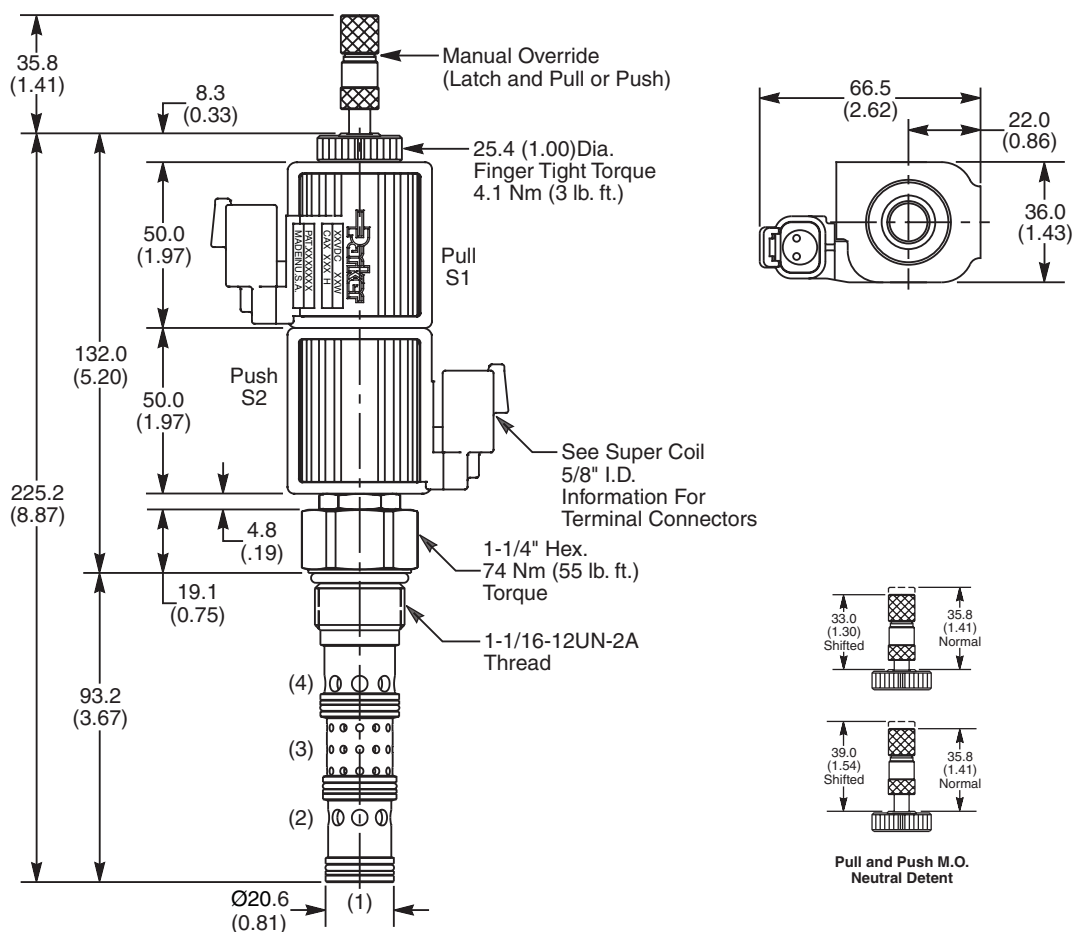

**Ordering Information**

|                        |           |                 |       |           |              |                  |       |               |           |
|------------------------|-----------|-----------------|-------|-----------|--------------|------------------|-------|---------------|-----------|
| <b>DSH125</b>          | <b>59</b> |                 |       |           |              |                  |       |               |           |
| 12 Size Solenoid Valve | Style     | Override Option | Seals | Coil Type | Coil Voltage | Coil Termination | Diode | Body Material | Port Size |

| Code | Style                 |
|------|-----------------------|
| 59   | High Flow ("SP" Coil) |

| Code | Override Options       |
|------|------------------------|
| Omit | None (Consult Factory) |
| DN   | Latch Operated**       |

\*\*40 nt/9 lbs.

| Code | Seals / Kit No.                    |
|------|------------------------------------|
| N    | Nitrile / Buna-N (Std.) (SK12-4LN) |
| V    | Fluorocarbon / (SK12-4LV)          |

| Code | Coil Type             |
|------|-----------------------|
| Omit | Without Coil          |
| SP   | Super Coil - 28 Watts |

| Code | Coil Voltage       |
|------|--------------------|
| Omit | Without Coil       |
| D012 | 12 VDC             |
| D024 | 24 VDC             |
| A120 | 120 VAC, 60/50 Hz  |
| A240 | 240 VAC, 60/50 Hz* |

\*22 Watts

| Code | Coil Termination   |
|------|--------------------|
| Omit | Without Coil       |
| C    | Conduit With Leads |
| D    | DIN Plug Face      |
| S    | Dual Spade*        |
| L    | Dual Lead Wire*    |
| LS   | Sealed Lead Wire*  |
| H    | Molded Deutsch*    |

See Super Coil 5/8" I.D.  
 \*DC Only

| Code | Diode |
|------|-------|
| Omit | None  |
| R    | Diode |

| Code | Body Material |
|------|---------------|
| Omit | Steel         |
| A    | Aluminum      |

| Code | Port Size      | Body Part No. |
|------|----------------|---------------|
| Omit | Cartridge Only |               |
| 12T  | SAE-12         | (B12-4L-*12T) |

\* Add "A" for aluminum, omit for steel.