
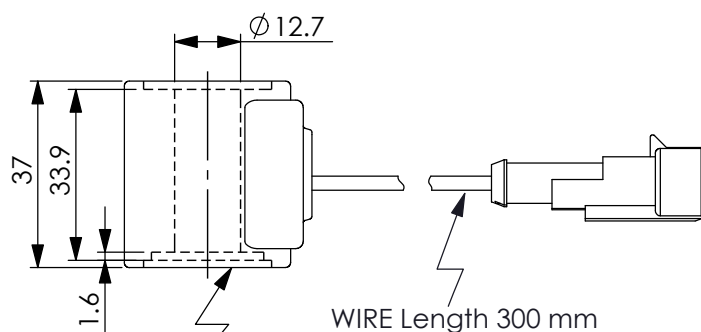



SOLENOID OPERATED VALVE Continuous Duty Coils-ED 100%

Ordering Code: **EC-04H-X-Y-Z-D300**

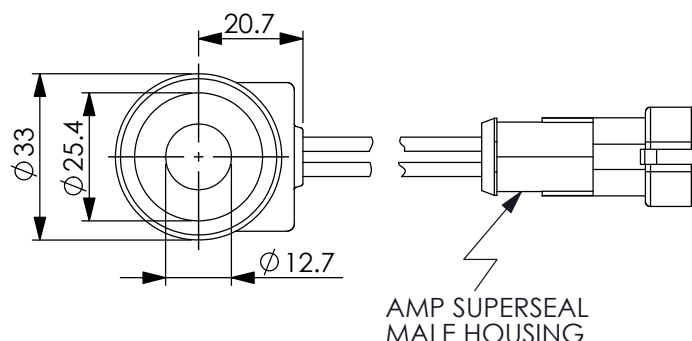

While installing, please be sure
that this side is toward to
the solenoid cartridge valve.

UNIT:mm



TECHNICAL DATA

Weight: 0.14 kg

HEAT INSULATION CLASS H:
356°F (180°C)

Ambient temperature range:
-22+140°F (-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not
exceed $\pm 10\%$ of nominal voltage to
obtain correct operation and long
life of coils.

CE approved

X	Power (W)		Y	Connections	
147	14.7 Watt.		C	DOUBLE LEAD (L)	

Z	Voltage (V)	Resistance (Ω)	Current (A)		
	Nominal	20~25 °C	Cold Coil	Hot Coil	
E	12V DC	9.8 \pm 7%	1.22	0.83	
D	24V DC	39.3 \pm 7%	0.62	0.41	