

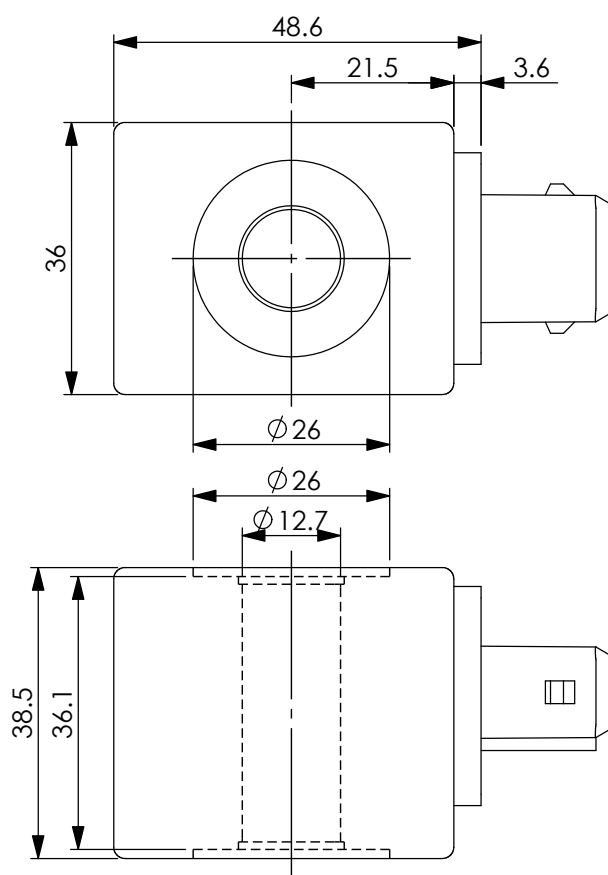


Ordering Code: **EC-04W-X-Y-Z**



UNIT:mm



### TECHNICAL DATA

Weight: 0.22 kg

HEAT INSULATION CLASS H:  
356°F (180°C)

Ambient temperature range:  
-22+140°F (-30+60°C)

Available on request:  
Different Voltages -  
Different connectors.

Inlet voltage fluctuations must not exceed  $\pm 10\%$  of nominal voltage to obtain correct operation and long life of coils.

**CE** approved

| X   | Power (W) |  | Y | Connections    |  |
|-----|-----------|--|---|----------------|--|
| 200 | 20 Watt.  |  | A | AMP JUNIOR (L) |  |
|     |           |  |   |                |  |
|     |           |  |   |                |  |

| Z | Voltage (V) | Resistance ( $\Omega$ ) | Current (A) |          |  |
|---|-------------|-------------------------|-------------|----------|--|
|   | Nominal     | 20~25 °C                | Cold Coil   | Hot Coil |  |
| F | 10V DC      | 5.0 $\pm$ 8%            | 1.98        | 1.28     |  |
| E | 12V DC      | 7.5 $\pm$ 7%            | 1.66        | 1.06     |  |
| N | 20V DC      | 20 $\pm$ 7%             | 0.99        | 0.65     |  |
| D | 24V DC      | 28.6 $\pm$ 7%           | 0.88        | 0.53     |  |
| G | 26V DC      | 34.2 $\pm$ 7%           | 0.77        | 0.52     |  |
| J | 28V DC      | 39.2 $\pm$ 7%           | 0.71        | 0.50     |  |
| L | 36V DC      | 64 $\pm$ 7%             | 0.56        | 0.36     |  |
| H | 48V DC      | 110 $\pm$ 7%            | 0.45        | 0.28     |  |
|   |             |                         |             |          |  |
|   |             |                         |             |          |  |
|   |             |                         |             |          |  |
|   |             |                         |             |          |  |