

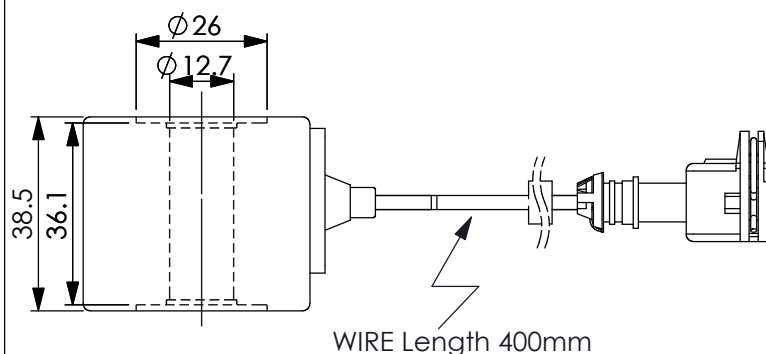
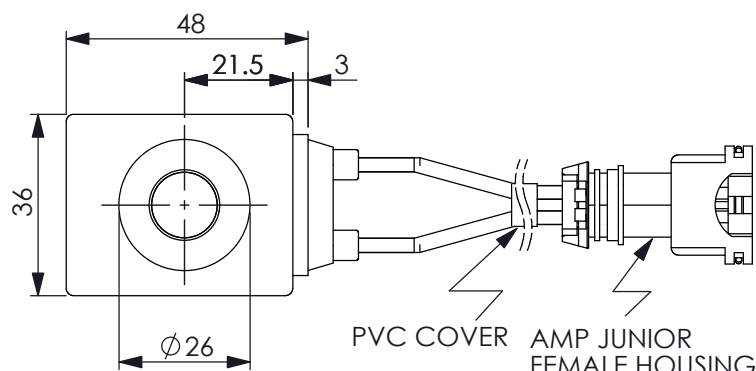


SOLENOID OPERATED VALVE Continuous Duty Coils-ED 100%

Ordering Code: **EC-04W-X-Y-Z-A400**



UNIT:mm



TECHNICAL DATA

Weight: 0.22 kg

HEAT INSULATION CLASS H:
356°F (180°C)

Ambient temperature range:
-22+140°F (-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed $\pm 10\%$ of nominal voltage to obtain correct operation and long life of coils.

CE approved

X	Power (W)		Y	Connections	
200	20 Watt.		C	DOUBLE LEAD (L)	

Z	Voltage (V)	Resistance (Ω)	Current (A)		
	Nominal	20~25 °C	Cold Coil	Hot Coil	
E	12V DC	7.5 \pm 7%	1.66	1.06	
D	24V DC	28.6 \pm 7%	0.88	0.53	