

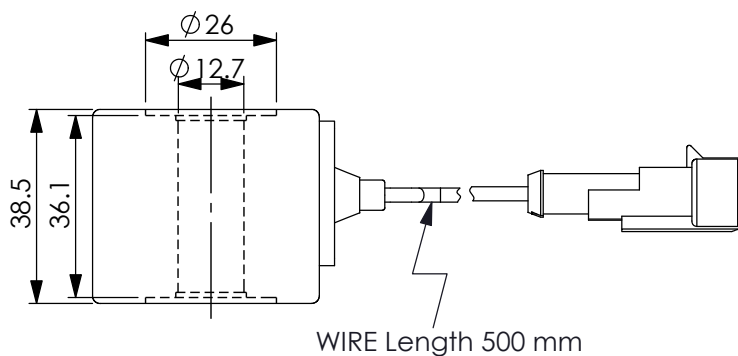
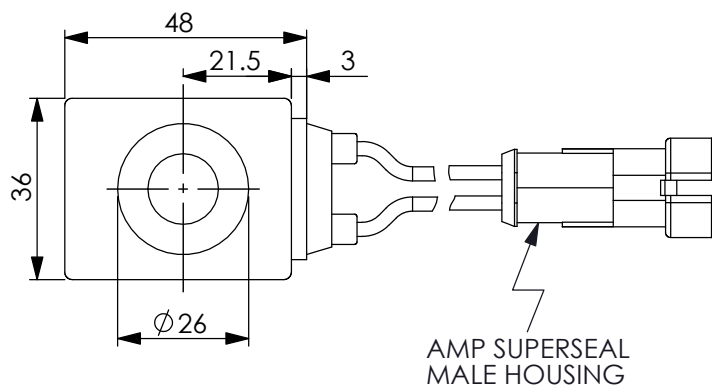


## SOLENOID OPERATED VALVE Continuous Duty Coils-ED 100%

Ordering Code: **EC-04W-X-Y-Z-D500**



UNIT:mm



### TECHNICAL DATA

Weight: 0.22 kg

HEAT INSULATION CLASS H:  
356°F (180°C)

Ambient temperature range:  
-22+140°F (-30+60°C)

Available on request:  
Different Voltages -  
Different connectors.

Inlet voltage fluctuations must not  
exceed  $\pm 10\%$  of nominal voltage to  
obtain correct operation and long  
life of coils.

CE approved

X	Power (W)		Y	Connections	
200	20 Watt.		C	DOUBLE LEAD (L)	

Z	Voltage (V)	Resistance ( $\Omega$ )	Current (A)		
	Nominal	20~25 °C	Cold Coil	Hot Coil	
E	12V DC	7.5 $\pm$ 7%	1.66	1.06	
D	24V DC	28.6 $\pm$ 7%	0.88	0.53	
J	28V DC	39.2 $\pm$ 7%	0.71	0.50	