




SOLENOID OPERATED VALVES

(Poppet 2-Way Normally-Open Cartridge Style)

Ordering Code: **EP-10W-X-Y-Z-05**

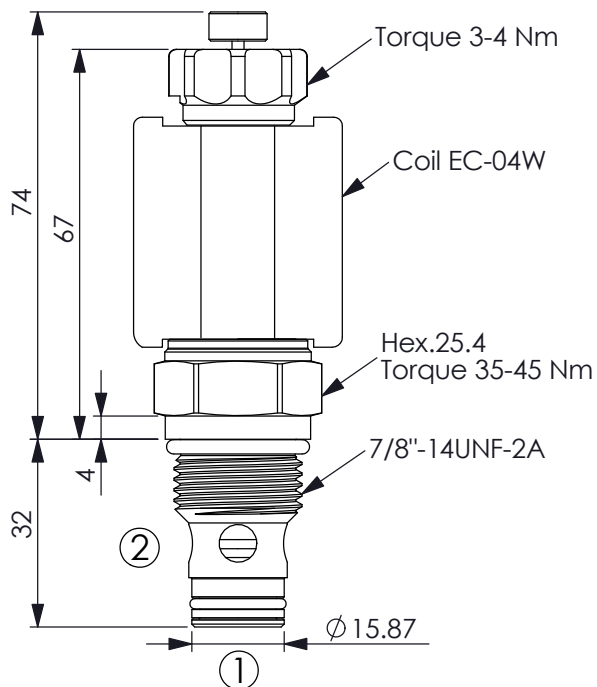

UNIT:mm

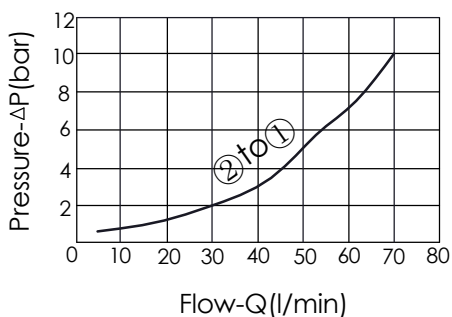

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	70	l/min
Cavity-Tooling:	10W-2	
Installation torque:	35-45	Nm
Weight:	0.16	kg
Fluids-Temperatures:	-40~120	°C
Internal Leakage:	0.15cc/minute	
(3 drops/minute) max.at 350 bar		
Filtration:	25 μ m nominal or better	
Minimun Voltage Required:	90 % of nominal	
Coils must be ordered separately		
Mounting Position:	unrestricted	

Y	OPERATION	
06	Normally-Open Reverse Flow De-Energized	

X	STRUCTURE	
2A	2 Ports - 20 Watt. Coil	

Z	OPTIONS	
N	Non-adjustable	
P	Push Style Manual Override	