

# FELLING GRABS FMS

A MODERN AND SAFE WAY TO FELL  
AND MAINTAIN TREES, SAVING ON MANPOWER

COMPATIBLE WITH




EXCAVATORS  
TELEHANDLERS




PATENTED "SPRING-LOADED"  
SAFETY SYSTEM TO PREVENT  
THE BAR FROM GETTING STUCK  
DURING CUTTING


FMS 600  
FMS 750

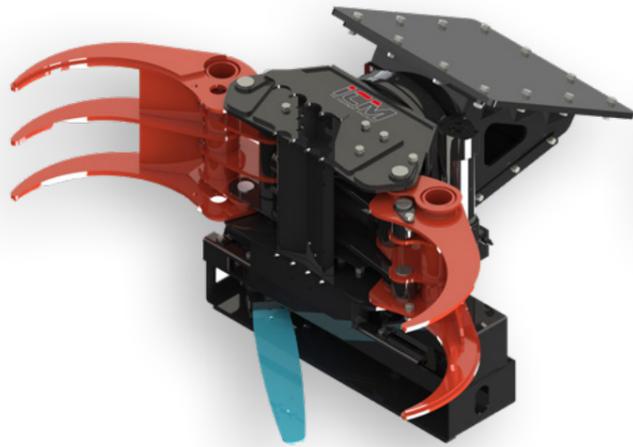

FMS 500

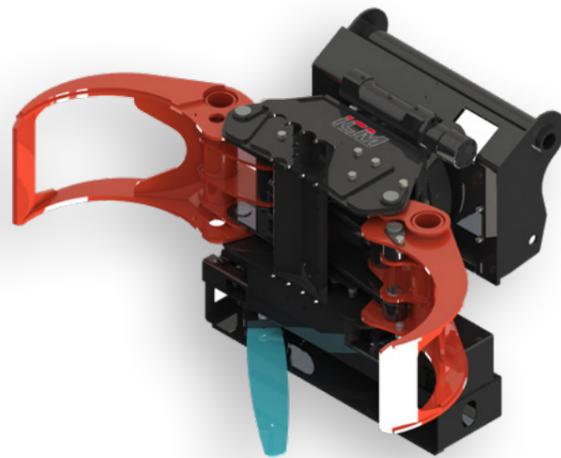

## TECHNICAL DESIGN

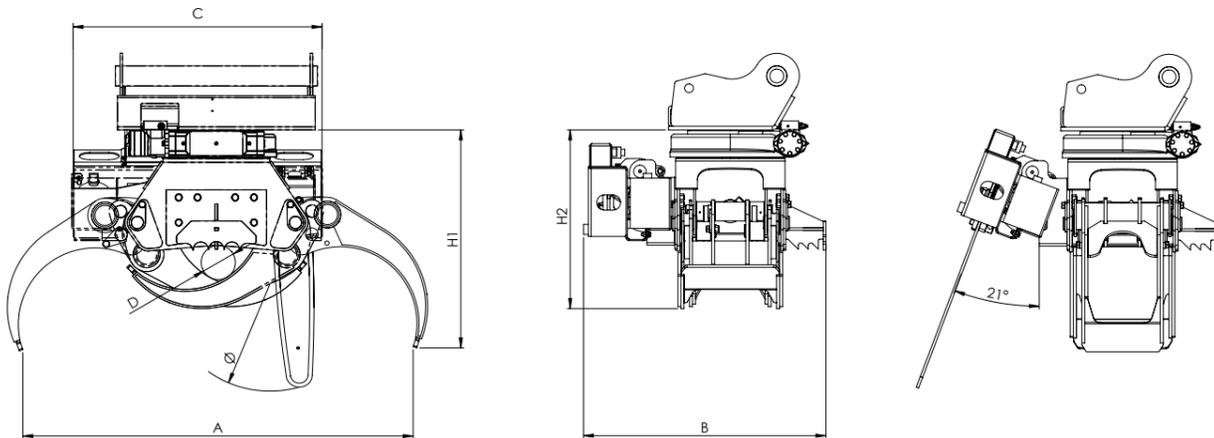

EXCAVATORS	TON	10-15	-	
TELEHANDLERS	TON	-	13-24	
MODEL		FMS 600	FMS 500	
WEIGHT	kg	575	570	
AREA	m <sup>2</sup>	0,26	0,26	
CLAMPING FORCE	daN	1700	1700	
MAX LOAD	kg	3000	3000	
MAX PRESSURE	bar	250	250	
A	mm	1595	1555	
B	mm	966	966	
C	mm	992	997	
D - MINIMUM GRIPPING DIAMETER	mm	140	135	
Ø - MAX CUTTING DIAMETER	mm	600	500	
H1	mm	841	867	
H2	mm	711	711	
ROTATION	MAX PRESSURE	bar	120	120
	MAX FLOW RATE	lt/min	12	12

## OPTIONAL



EXCAVATOR COUPLING

