

Solenoid operated valves

2-way 2-positions


Common cavity size 10

Cartridge style in manifold

VEI-CS-8A-10A

OS.15 - K - 36 - Y - Z - W


Dimensions

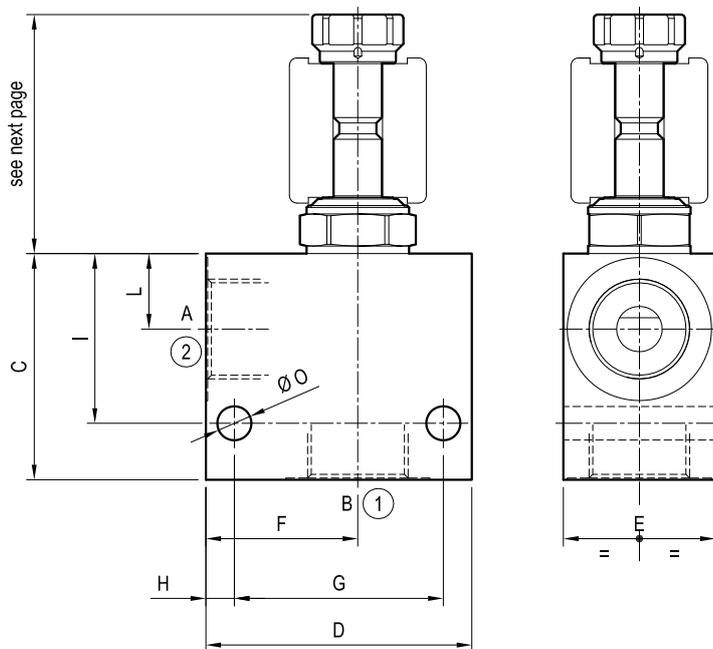

[mm (inches)]

A - B	C	D	E	F	G	H	I	L	O
G 1/2	60 (2.36)	60 (2.36)	35 (1.38)	35 (1.38)	45 (1.77)	7.5 (0.3)	45 (1.77)	19 (0.75)	7.5 (0.3)
G 3/4	60 (2.36)	70 (2.76)	40 (1.58)	40 (1.58)	55 (2.17)	7.5 (0.3)	45 (1.77)	20 (0.79)	9 (0.35)

Cartridge schemes

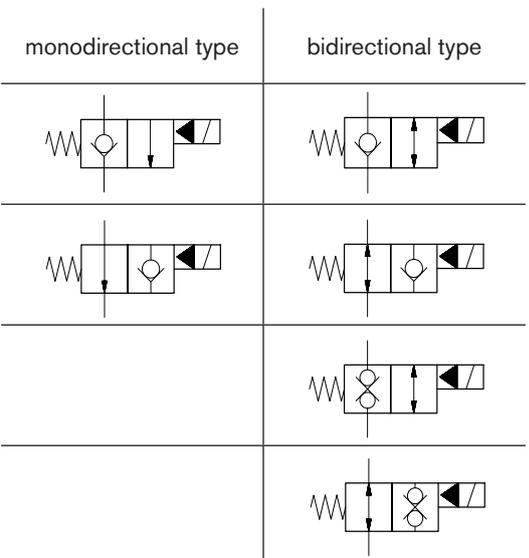


Technical data

Max flow:	up to 70 l/min	(19 gpm)
Max operating pressure for steel body:	350 bar	(5000 psi)
Max operating pressure for aluminium body:	210 bar	(3000 psi)

To order only manifold see data sheet RE 18325-85

Performance graphs

K=01-02

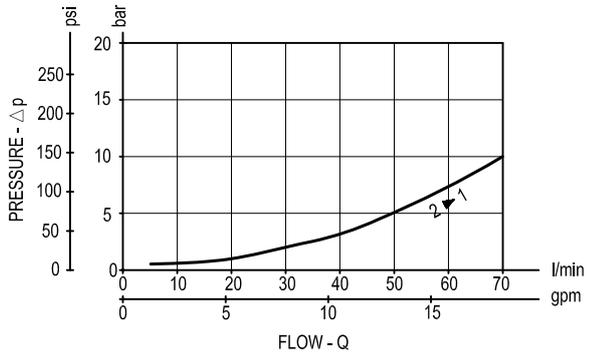

K=05-06
K=31-32

