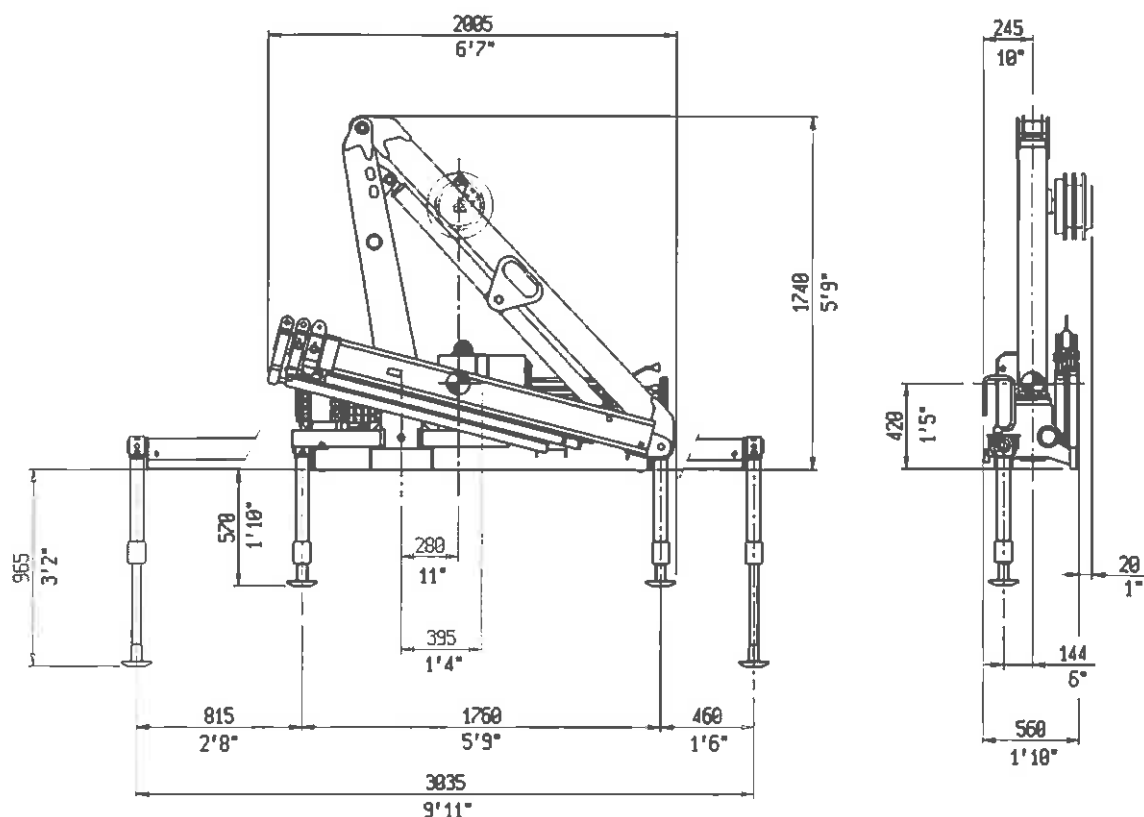


mm
ft

		2521	2522	2523
Momento di sollevamento massimo - Maximum lifting moment - Moment de levage maxi - Max. Lastmoment - Momento del elevación máxima	tm kNm	2,5 24,0	2,4 23,0	2,0 19,1
Sbraccio oleodinamico - Maximum hydraulic reach - Allongement hydraulique - Hydraulische reichweite, Standard - Alcance hidráulico orizzontale - horizontal - horizontal - horizontal verticale - vertical - vertical - vertical	m m	4,80 7,30	6,10 8,50	7,40 9,80
Sbraccio con prolunghe - Maximum reach with manual extensions - Allongement avec rallonges manuelles - Reichweite, manuelle Verlängerungen - Alcance con prolongas manuales orizzontale - horizontal - horizontal - horizontal verticale - vertical - vertical - vertical	m m	7,40 9,75	7,40 9,75	- -
Impianto oleodinamico - Hydraulic system - Circuit hydraulique - Hydraulikanlage - Sistema hidráulico portata raccomandata - recommended oil flow débit recommandé - empfohlene Fördermenge caudal requerido	l/min	10	10	10
pressione massima - rated pressure - pression maxi - betriebsdruck - presión máxima	Mpa	26,5	26,5	26,5
capacità del serbatoio - tank capacity - capacité du réservoir - tankinhalt - capacidad del depósito de aceite	l	38	38	38
Gruppo di rotazione - Slewing system - Rotation - Schwenksystem - Sistema de giro	°	360	360	360
coppia di rotazione - slewing moment - couple de rotation - schwenkmoment - momento de giro	kNm	3	3	3
pendenza massima di lavoro - max. working heel - devers maxi de travail - maxi arbeitsneigung - inclinación máxima de trabajo	%(°)	7(4)	7(4)	7(4)
Peso della gru standard - Standard crane weight Poids de la grue standard - Eigengewicht - Peso de la grúa est. Con serbatoio non rifornito - Empty oil tank - réservoir huile non garni - oeltank leer - depósito de aceite vacío	kg	410	440	465

I dati tecnici possono essere aggiornati senza preavviso
Technical data can be revised without prior notice

Les données techniques peuvent être modifiées sans préavis
Technische Änderungen vorbehalten

Reservado el derecho de modificaciones



[2521]

990	670	500	370	250	Kg	
2.50	3.45	4.60	5.90	7.20	m	

[2522]

990	620	450	350	250	Kg	
2.40	3.50	4.70	5.90	7.20	m	

[2523]

990	540	390	310	230	Kg	
1.95	3.60	4.80	6.00	7.20	m	

