


PPM-podkładki metalowo-gumowe (samocentrujące)



Materiał: Stal Miękka + NBR 70
Temperatura pracy: -30°C + 110°C

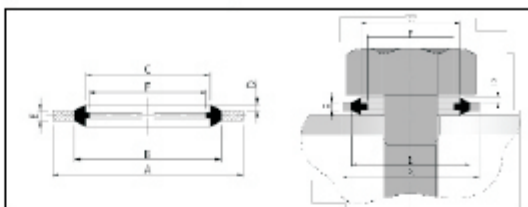

Kod zamówienia	średnica	Wymiary						Ilość szt. w opak.
		A	B	C	D	E	F	
METRYCZNE								
606-PPM-06	M6	10,00	8,00	6,70	0,30	1,00	4,70	100
612-PPM-08	M8	13,00	10,00	8,70	0,30	1,00	6,40	100
617-PPM-10	M10	16,00	12,40	10,70	0,40	1,50	8,05	100
622-PPM-12	M12	18,00	14,30	12,70	0,40	1,50	9,73	100
627-PPM-14	M14	22,00	16,40	14,70	0,40	1,50	11,38	100
629-PPM-16	M16	24,00	18,40	16,70	0,40	1,50	13,41	100
632-PPM-18	M18	26,00	20,40	18,70	0,40	1,50	14,76	100
633-PPM-20	M20	28,00	22,50	20,70	0,40	1,50	16,76	100
636-PPM-22	M22	30,00	24,40	22,70	0,40	2,00	18,74	100
638-PPM-24	M24	32,00	26,40	24,70	0,40	2,00	20,11	100
640-PPM-27	M27	36,00	29,00	27,20	0,40	2,00	23,30	100
642-PPM-30	M30	39,00	33,00	31,00	0,40	2,00	25,70	100
643-PPM-33	M33	42,00	35,80	33,70	0,40	2,00	28,70	100
645-PPM-36	M36	46,00	38,80	36,70	0,40	2,00	31,10	100
647-PPM-42	M42	53,00	44,40	42,70	0,40	3,00	36,50	100
CALOWE								
820-PP45-A	1/8"	15,88	11,84	10,37	0,25/0,51	2,03	8,56	100
821-PP45-B	1/4"	20,57	15,21	13,74	0,25/0,51	2,03	11,45	100
823-PP45-C	3/8"	23,80	18,75	17,28	0,25/0,51	2,03	14,96	100
825-PP45-D	1/2"	28,58	23,01	21,54	0,25/0,51	2,49	18,64	100
826-PP45-E	5/8"	31,75	24,97	23,49	0,25/0,51	2,49	20,60	100
827-PP45-F	3/4"	34,93	28,53	27,05	0,25/0,51	2,49	24,13	100
830-PP45-H	1"	42,80	36,88	33,89	0,25/0,51	3,20	30,30	100
832-PP45-J	1.1/4"	52,38	45,93	42,93	0,25/0,51	3,20	38,96	100
833-PP45-K	1.1/2"	58,60	51,39	48,44	0,25/0,51	3,20	44,86	100
836-PP45-M	2"	73,03	63,63	60,58	0,25/0,51	3,20	56,67	50

PPM-Stal nierdzewna + viton

Materiał: stal nierdzewna S316+ viton 70

Temperatura pracy: -25°C + 225°C

Kod zamówienia	Średnica	Wymiary					
		A	B	C	D	E	F
XV821-PP45-B	1/4"	20,57	15,21	13,74	0,25/0,51	2,03	11,45
XV823-PP45-C	3/8"	23,80	18,75	17,28	0,25/0,51	2,03	14,96
XV825-PP45-D	1/2"	28,58	23,01	21,54	0,25/0,51	2,49	18,64
XV827-PP45-F	3/4"	34,93	28,53	27,05	0,25/0,51	2,49	24,13
XV830-PP45-H	1"	42,80	36,88	33,89	0,25/0,51	3,00	30,30