

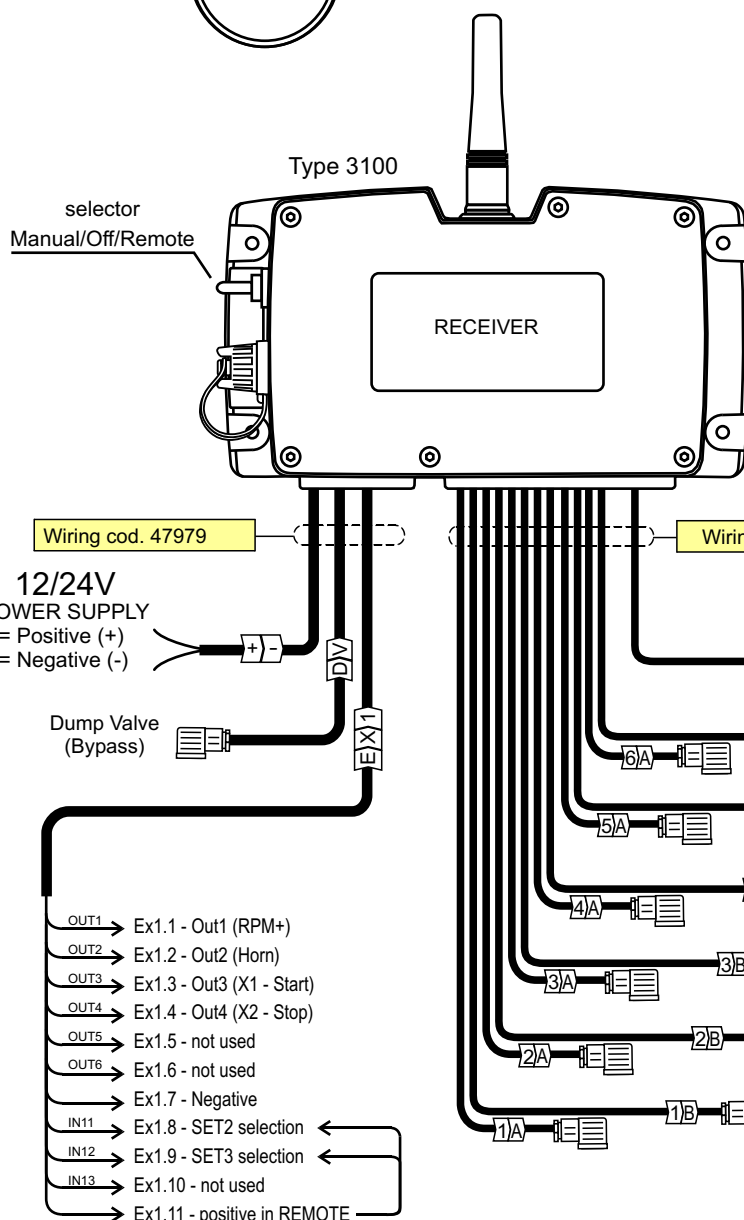
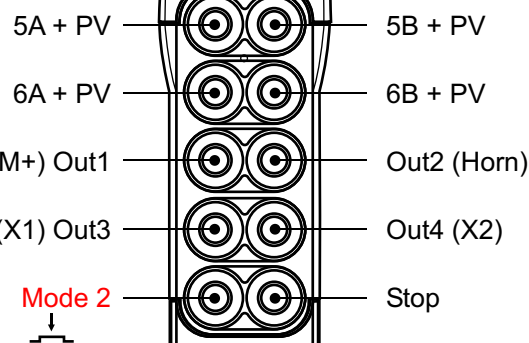


Handy Control Unit
(HCU)


type: 47930

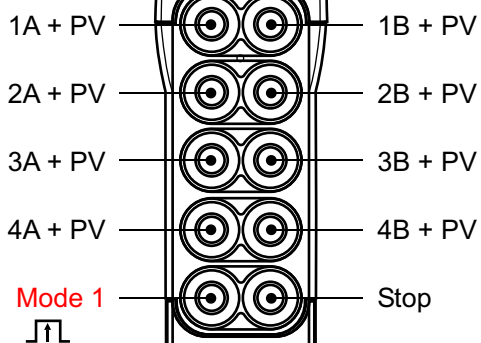


Battery charger 12/24V



2 x AA size
rechargeable
battery



Pairing Plug p/n: 48118



Proportional valve PV

Directional ON/OFF
outputs with DIN
connectors
(Functions from a 1 to 5: I_{max} 2.3A;
Function 6: I_{max} 1.8A)

Disconnecting the wire Ex1.8 select the SET2.
Disconnecting the wire Ex1.9 select the SET3.
Per codice **B** collegare assieme i fili 8 9 e 11.
When the SET2 and SET3 (reduced speed) is not used,
keep connected the wires Ex1.8 and EX1.9 to positive (Ex1.11).

In **MODE 1** each pushbutton commands at the same time:
In **MODE 2** the first 2 couples of pushbuttons commands at the same time:
- the ON/OFF directional output
- the DV (Bypass) output
- the proportional PWM output PV
Only one manoeuvre is allowed at a time.

SW: Vedi tabella Template (FW per UC: 5.26 o sup.)

	CODICE: PR4UBI16P (12V) PR4UBI26P (24V)
DESC: Scanreco G4 radio remote control global view for monofunction system with 6 ON/OFF and one prop. funct.	
FILE: ...Radio_Scanreco\G4\Produzione\Handy\PR4UBI16P.cdr	
DATA: 23/01/19	FOGLIO 1 DI 1