

Pallet Forks with Manual Shifting and Tines with Lock Pin Adjustment

The robust pallet fork with manual centre of gravity compensation is an economic alternative because of its versatile uses.

- **Manual change of position of shifting collar** by the operator enables handling of different loads, e.g. protection trellies or brick stacks
- **Connection plate** for flange rotator, shaft rotator or for a crane hook is included in the package
- **Throat height adjustable in steps** from 1000 mm to 1600 mm with a lock pin
- **Tine spread adjustable in steps** from 320 mm to 930 mm with a lock pin



Pallet forks PZP-M

Type	Load capacity (kg)	Throat height A (mm)	Tine length (mm)	Tine spread Z (mm)	Tine dimensions* (mm)	Centre of gravity (mm)	Self weight (w/o rotator) (kg)
PZP125M	1250	1000 – 1600	980	325 – 920	80 x 35	500	100
PZP150M	1500	1000 – 1600	980	325 – 920	80 x 35	500	120
PZP200M	2000	1000 – 1600	980	345 – 940	100 x 35	500	130
PZP250M	2500	1000 – 1600	980	355 – 945	90 x 40	500	170
PZP300M	3000	1000 – 1600	980	385 – 975	120 x 50	500	200
PZP150ML	1500	1000 – 1600	1150	345 – 940	100 x 35	600	150
PZP200ML	2000	1000 – 1600	1150	355 – 945	90 x 40	600	180
PZP250ML	2500	1000 – 1600	1150	385 – 975	120 x 50	600	235
PZP300ML	3000	1000 – 1600	1150	385 – 975	130 x 50	600	265

* width x height

Package consists of: pallet fork, protection chain PZP-SK

Please note:


- A protection trellis or net is mandatory for loose material (EN 13155)
- Extension of the effective height up to 3000 mm possible

Accessories

Type	Description
PZR450GF	flange rotator - load capacity 4500 kg for precise positioning of the load
PZR450G-XX*	shaft rotator - load capacity 4500 kg for precise positioning of the load
N00074	quick change system for shaft-type rotators
N00072-XX*	reduction link between rotator and grapple
N00070	rigid suspension link with pin for shaft rotator
N00071-XX*	non-rotating hook for shaft rotator

*) specify Ø shaft when ordering

Technical drawings

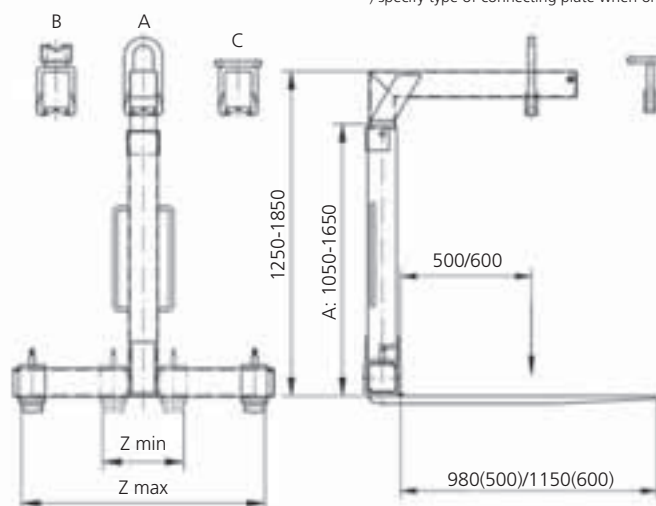

Connecting plate for:

- A*** crane hook
- B*** shaft rotator
- C*** flange rotator

*) specify type of connecting plate when ordering