



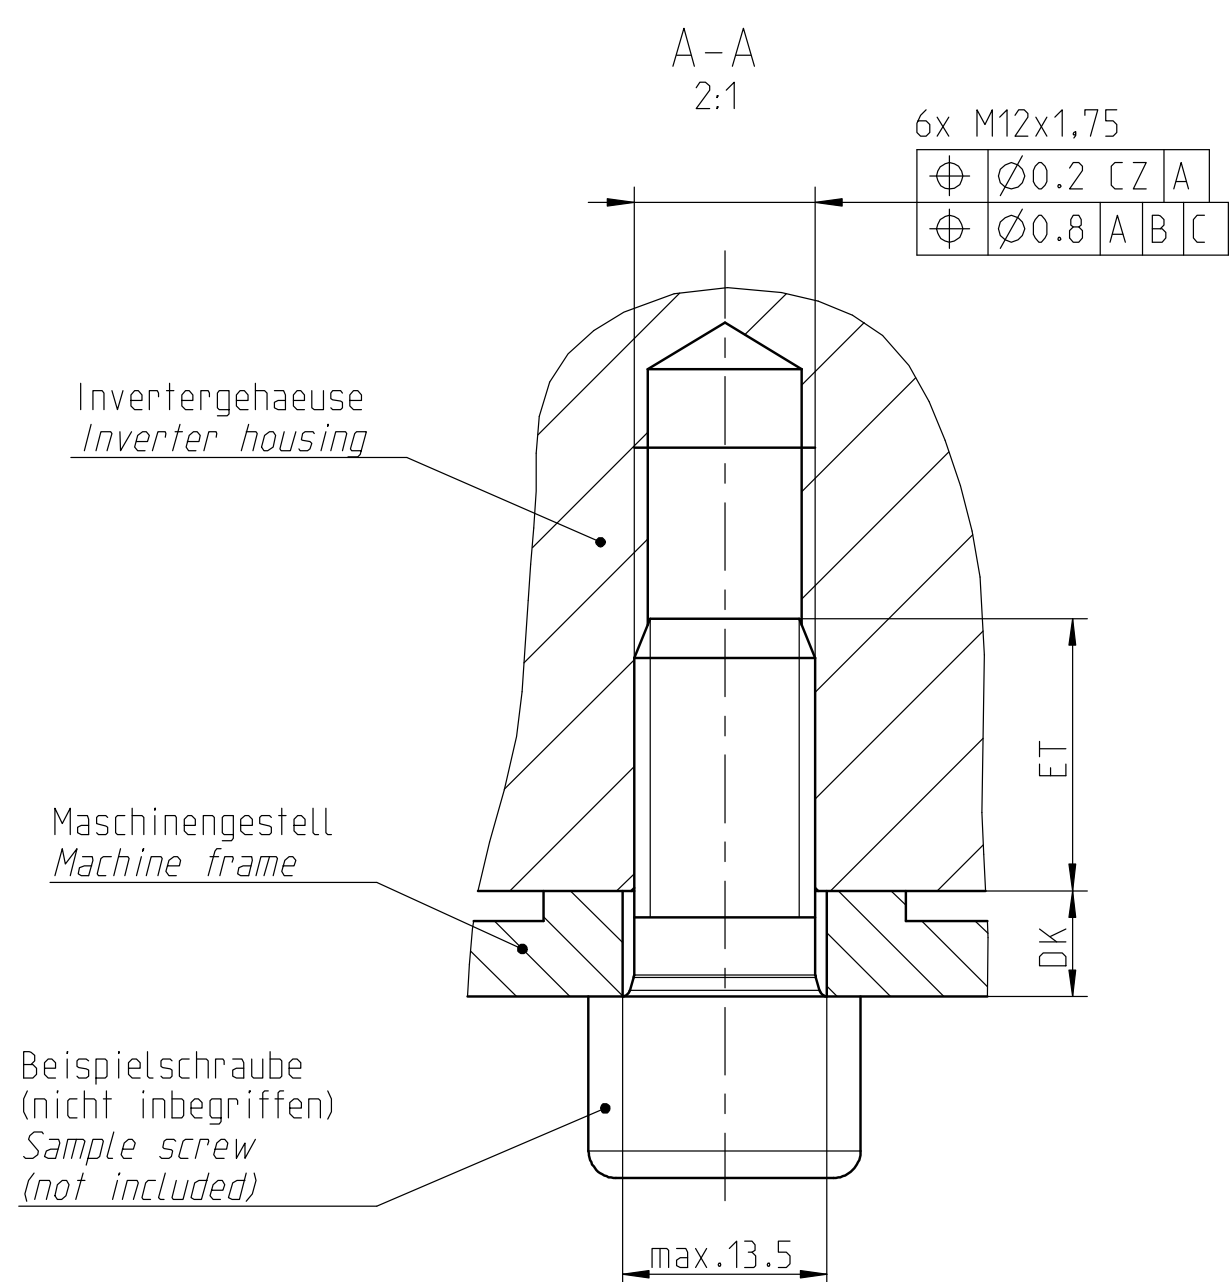







Empfohlenes Anzugsdrehmoment fuer M12 Schraube gemaeß den oben
genannten Randbedingungen: 60 Nm (Anzug mit Drehmomentschlüssel)
*Recommended tightening torque for M12 bolt according to the above
conditions: 60 Nm (tightening with torque wrench)*

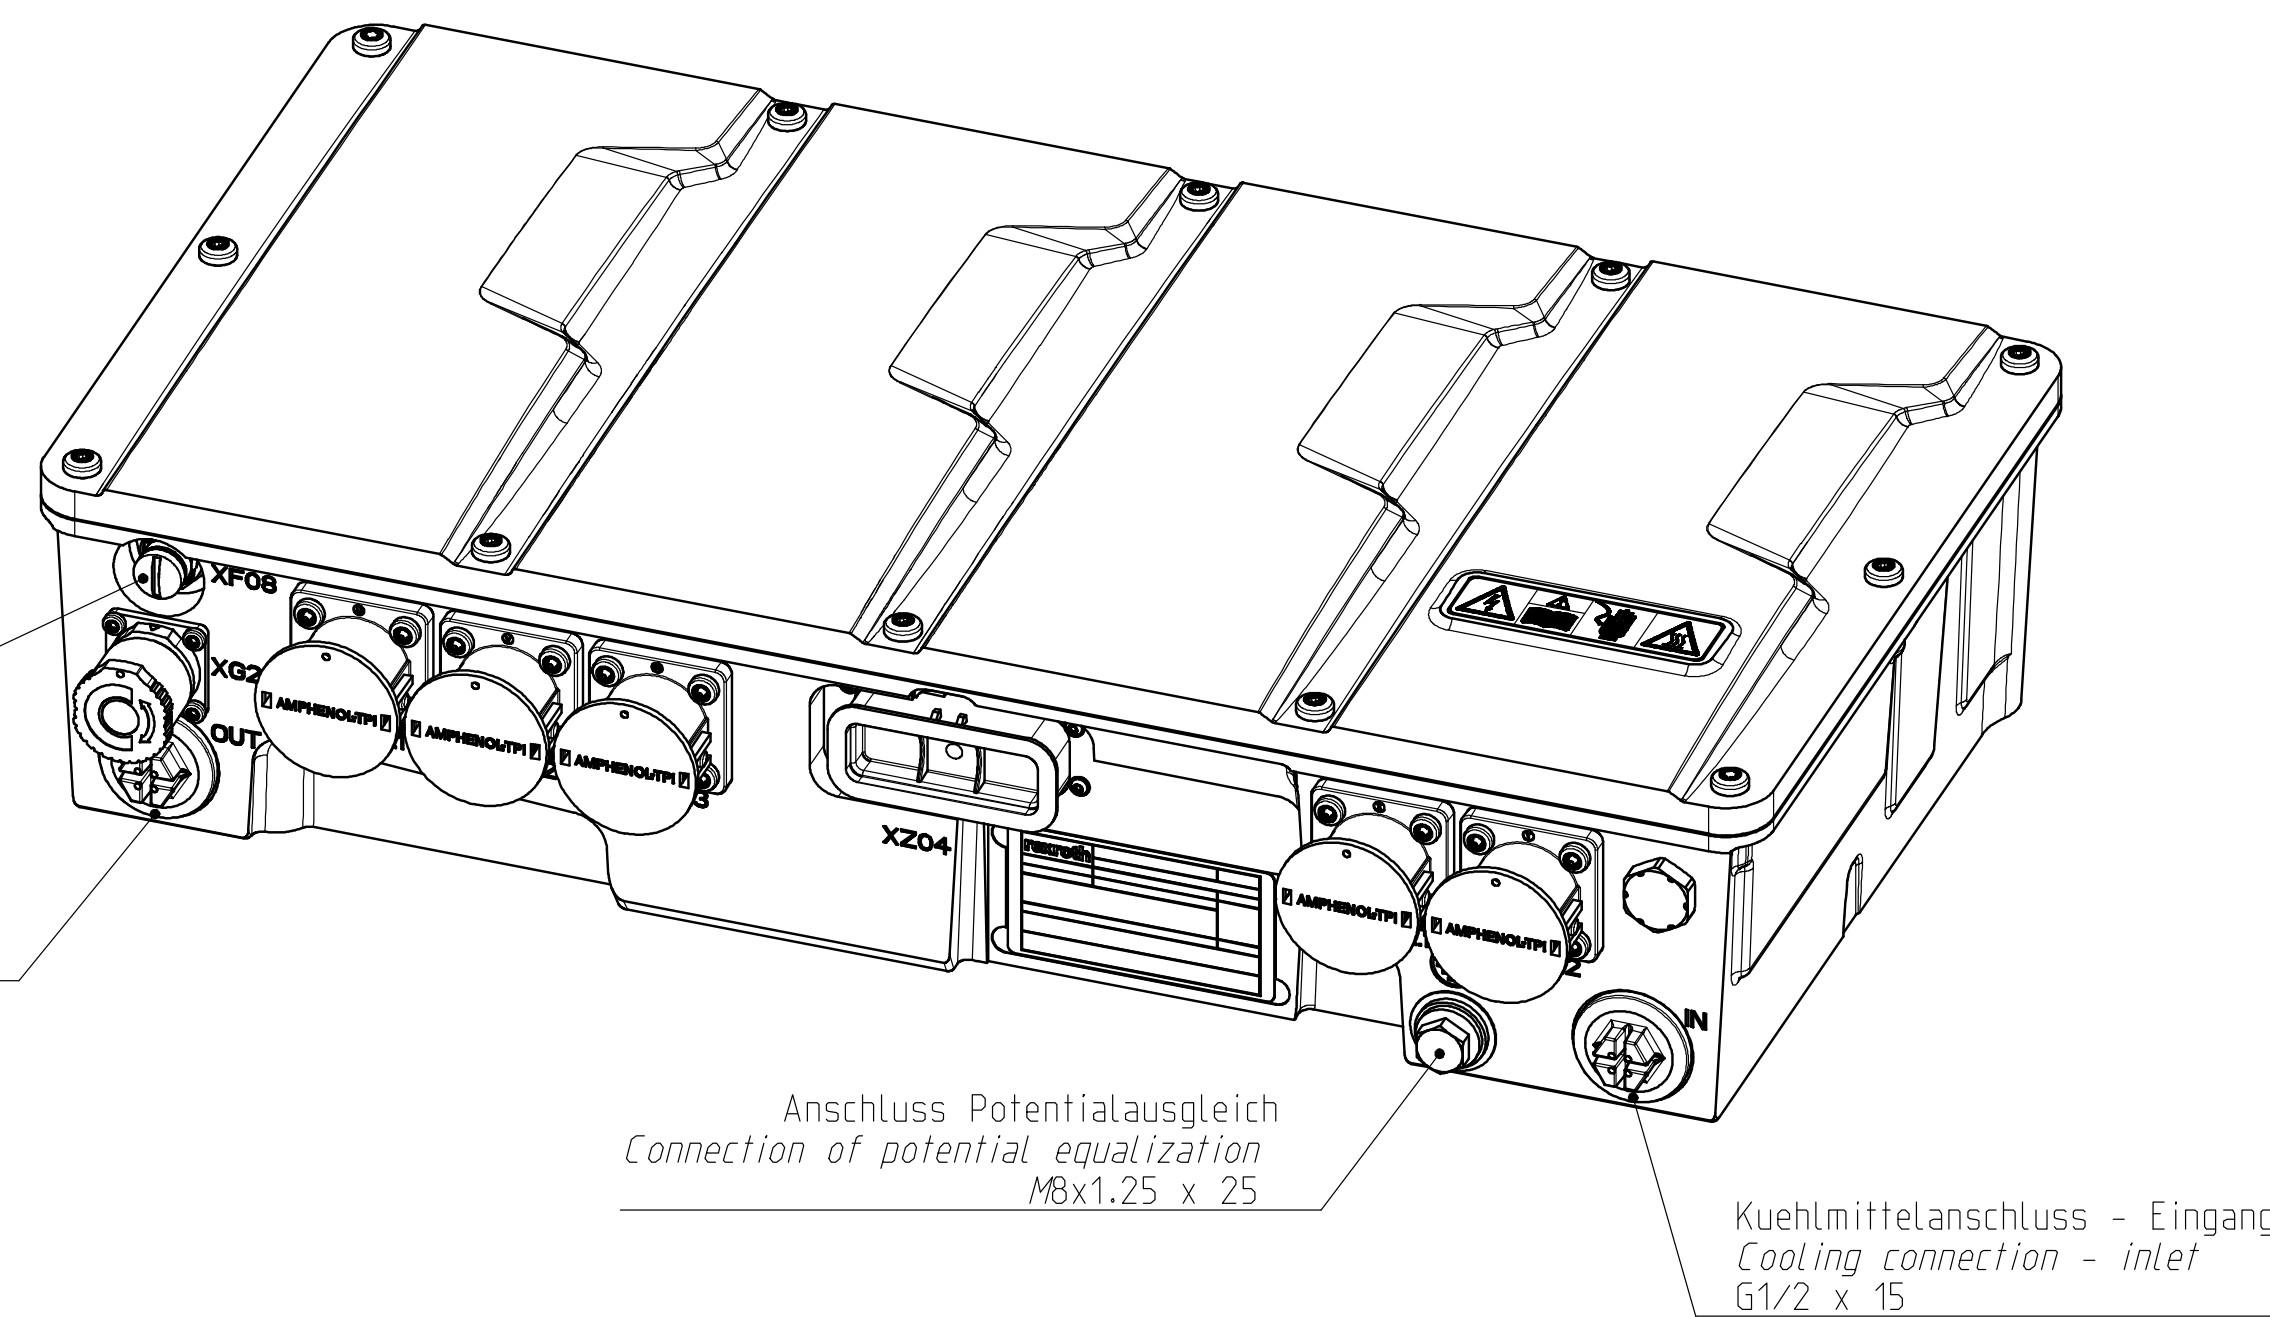

AA --		20251104		PEK2LO	PEK2LO	7268 DC-MH/P-ELMO21		
Int./Change/Amend.		YYTYYMDD	Drawn/Orig.	Checked/Rev.	Released/Orig.	BWN /Resp. Dept./Verantw. Abt.	Add. info./Zus. info.	
Lang./Spr.	Wght./Gsw.							
EN/DE				ED52-10600	ED52-10600			Sheet/BL
				ED52-10600				1/2
	Crit./P.	Stab./H.	Bosch		Doc.type		DP/DZ	Ind. A
	--	1:2	A Bosch Company		DBL	RB14422285	001	AA
MNR			Mat. meetg./Stoffe	Spec.	Repl. for		Repl. by	
			NZ590-0	1				

© Bosch Rexroth AG. All rights reserved, also regarding any disposal, reproduction, distribution, or in the event of applications for industrial property rights.

© Bosch Rexroth AG. Alle Rechte vorbehalten, auch bzgl. jeder Vervielfältigung, Verbreitung, oder sonstiger Benutzung sowie für den Fall von Schutzrechtsanmeldungen.

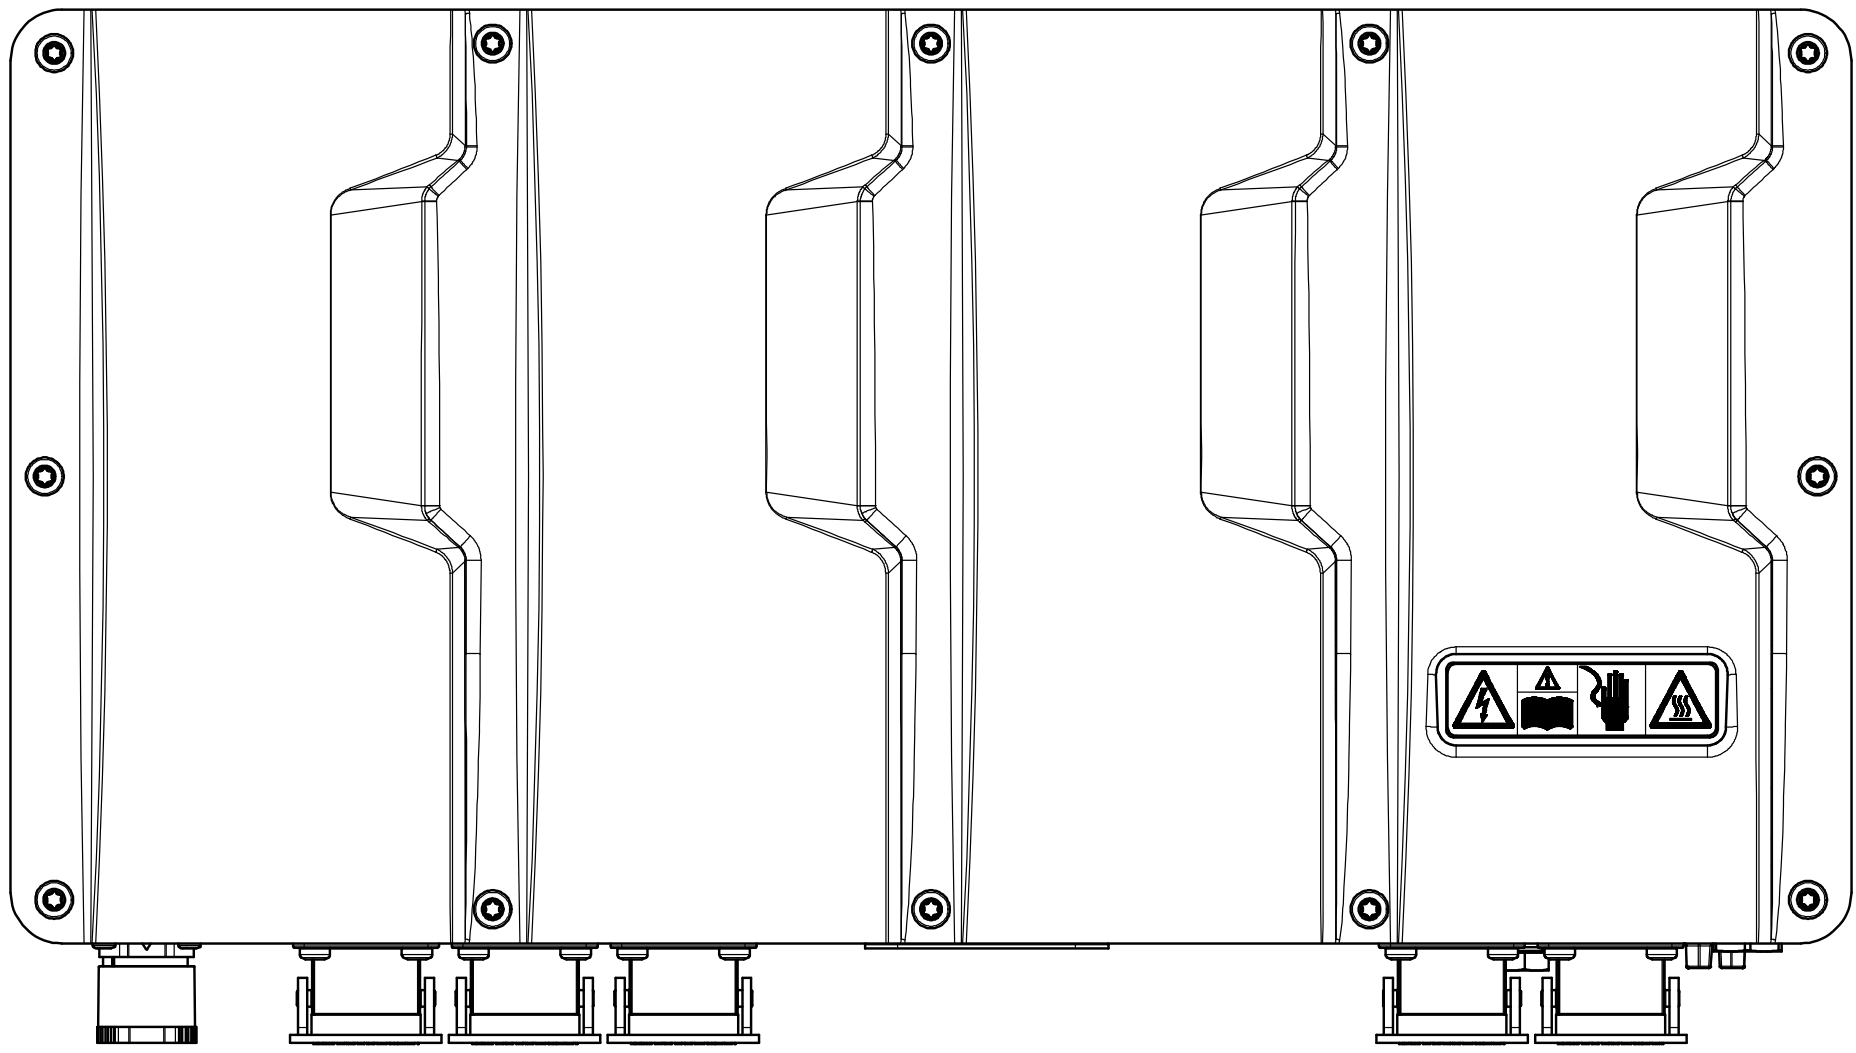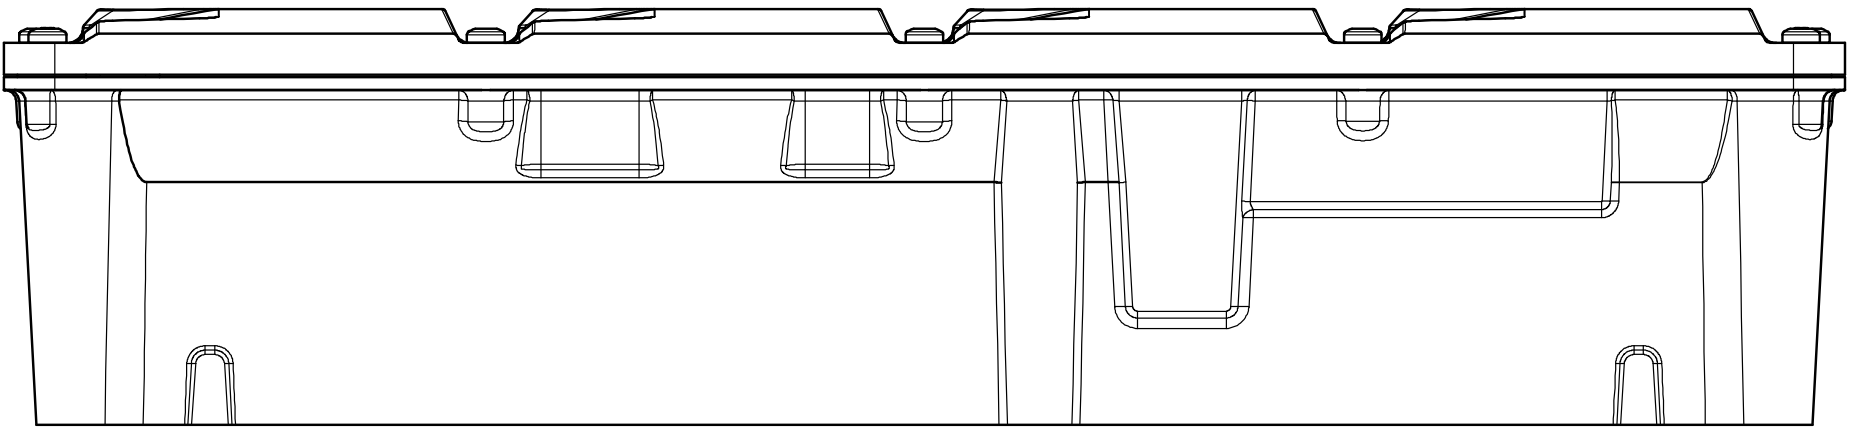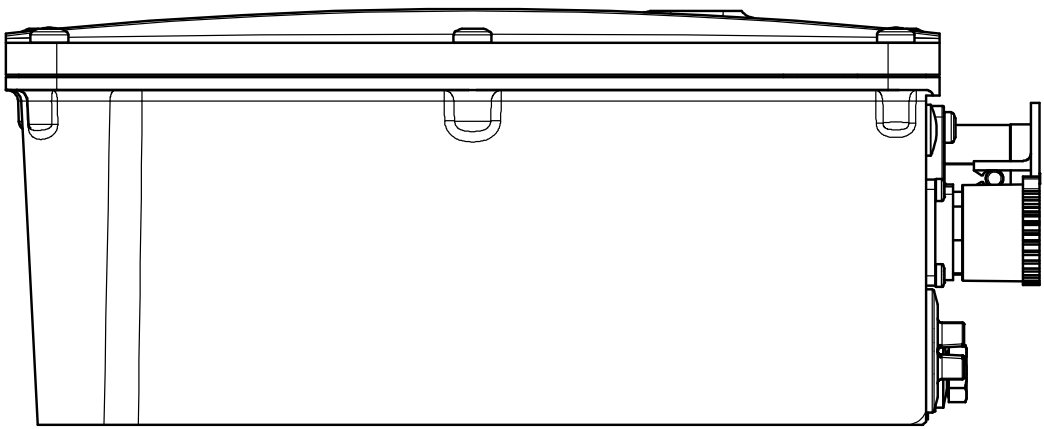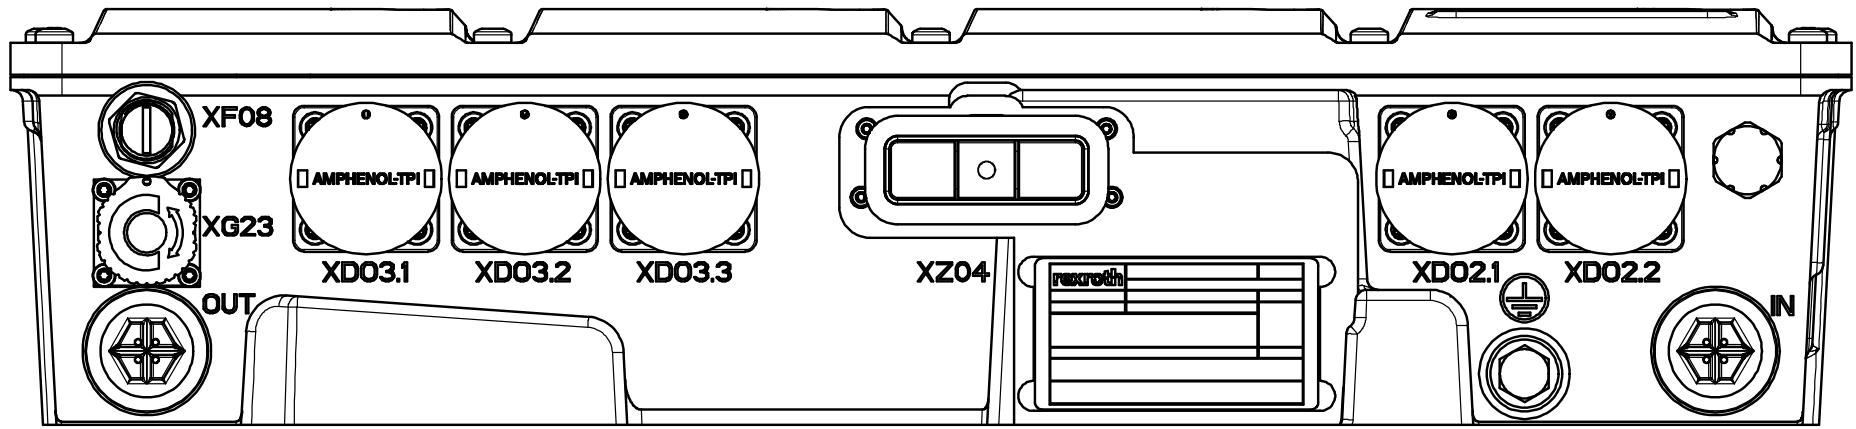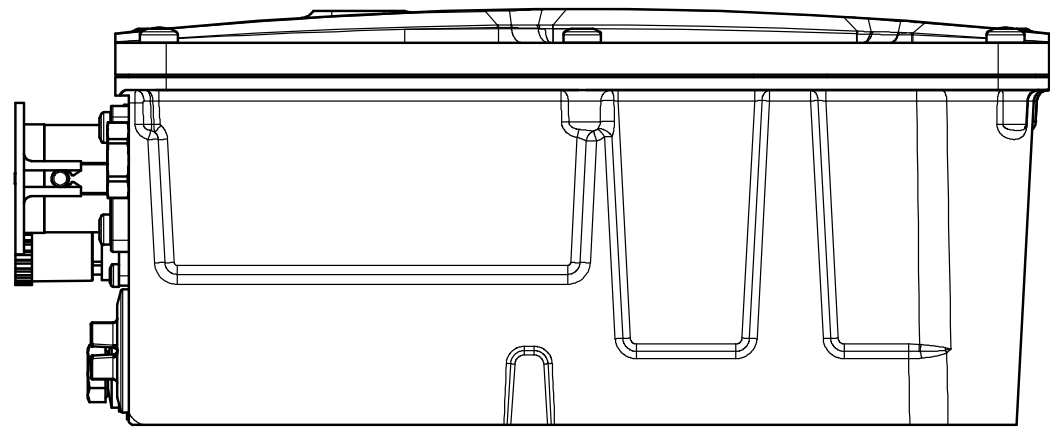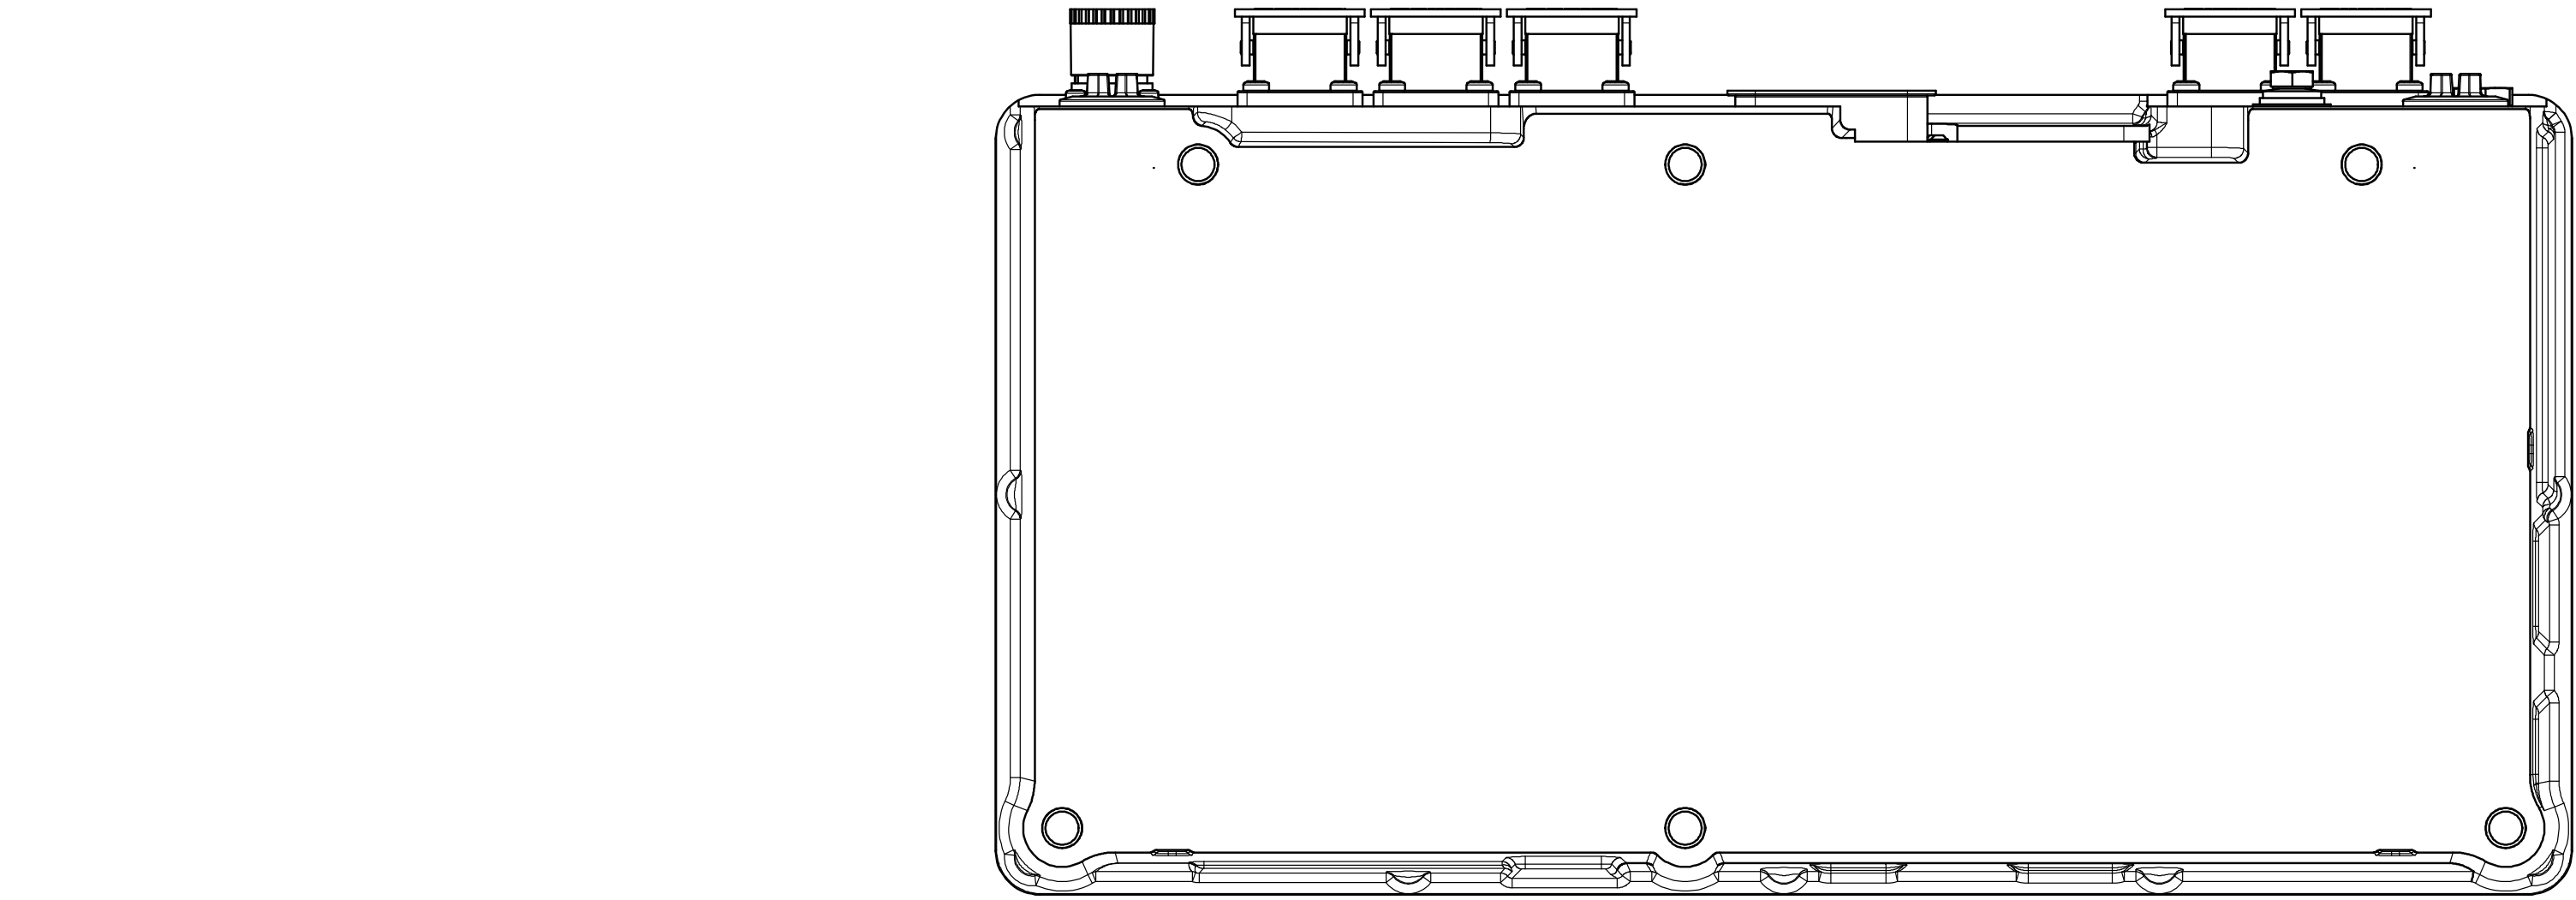

AA		--	20251104		PEK2LO	PEK2LO	7260 DC-MH/PJ-ELM021				
Ind./Change/Aend.		YYYYMMDD	Drawn/Gez.		Checked/Prüf.	Released/Rel.	BWN	Resp. dept./Verantw. Abt.	Add. info./Zus. Info.		
Lang./Spr.		EN/DE	Wght./Gew.		1:2		EDS2-L0600	EDS2-L0600		Sheet/Bl.	
Crit. P.		--	Stab		1:2		Mat.meets/Stoffe	Syst. PE		DP/ID 001	
MNR			N2580-1				Repl. for	Repl. by		Ind. Form	
										AA	
										A1	

all linear dimensions by
Alle Längsmessungen in

mm

rexroth

A Bosch Company

Doc. type DBL

Repl. for

RB14422285

Sheet/Bl. 2/2

Ind. Form

AA

A1