


4/3, 4/2 Directional valve elements with or without secondary relief valves, and with or without LS connections

B8_05... (EDBY)

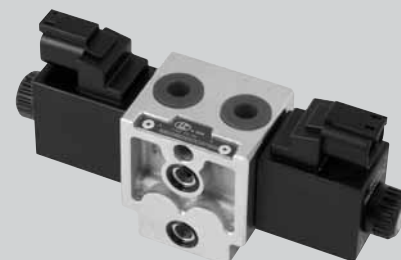

Summary

Description

General specifications

Ordering Details

Configuration

Spool variants

Principles of operation, cross section

Technical Data

$\Delta p-Q_v$ characteristic curves

Performance limits

External Dimensions and Fittings

Electric connection

General specifications

Description	Page	
		— Valve elements with 4 ways and 3, or 2, positions.
	1	— Control spools directly operated by screwed-in solenoids with extractable coils.
	2	
	2	— In the de-energized condition, the control spool is held in the central position by return springs.
	3	
	3	— Wet pin tubes for DC coils, with push rod for mechanical override; burnish surface treatment.
	4	
	4	— Coils can be rotated 360° around the tube.
	5	
	5	— Manual override (push-button or screw type) available upon request.
	6	
	6	— Plug-in connectors available: EN 175301-803 (Was DIN 43650); DT04-2P (Deutsch).
	7	

Ordering Details

	B	8	_	0 5	_ _ _ _	_ _	_ _	_	_	0	_
Family Directional valve elements EDB											
Type Size 4											
Configuration * Standard With secondary valve on A With ch. for Load Sensing	<div> <div> = 0 = 1 = 4 </div> <div> Optional fittings 0 = Standard emergency P = Push-button type emergency F = Screw type emergency </div> </div>										
Coil type C31	<div> <div> = 00 = OB = OC </div> <div> Secondary valves setting ²⁾ 0 = 50-210 bar (725-3045 PSI) * 1 = 100-310 bar (1450-4500 PSI) 2 = 25-50 bar (362-725 PSI) </div> </div>										
Spool variants ¹⁾ 4/3 operated on both sides a and b 4/2 operated on side a only	<div> <div> = _ 2 _ _ = _ 3 _ _ </div> <div> Ports** B = 9/16-18 UNF 2-B (SAE6) </div> </div>										
Voltage supply Without coil 12V DC 24V DC	<div> <div> 00 = Without coils 01 = With coils, without connectors 02 = With coils and with non-assembled connectors, type EN 175301-803 07 = With coils having DEUTSCH DT 04-2P connector </div> <div> Electric connections </div> </div>										

¹⁾ The required hydraulic symbol and spool variant can be chosen by consulting page 3.


2) Only for configuration 1.

* Without secondary valve, the standard configuration corresponds to "0".



** Additional ports on request.

Note: the secondary valve has a maximum flow capacity of 6 l/min. (1.6 GPM).

Configuration

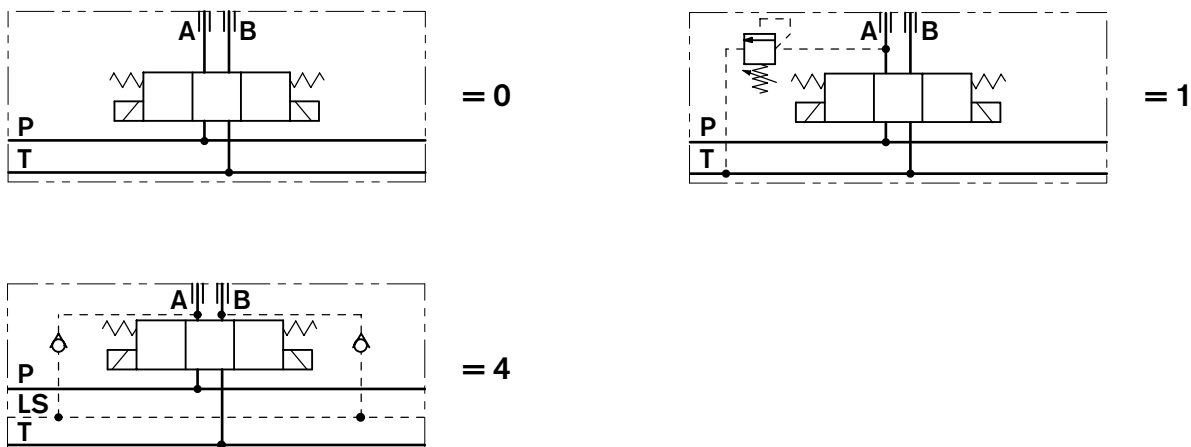

Spool variants

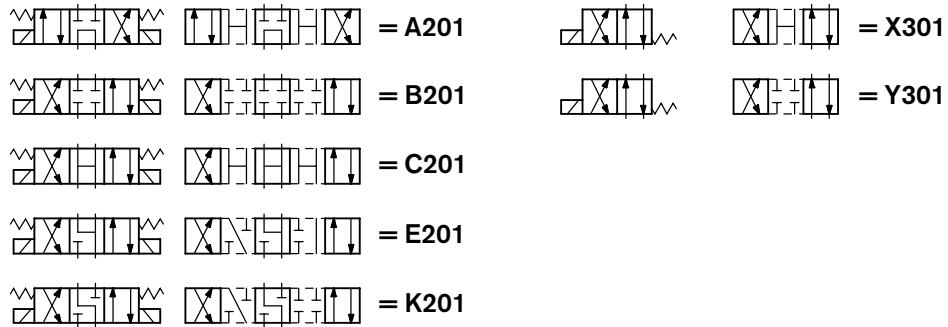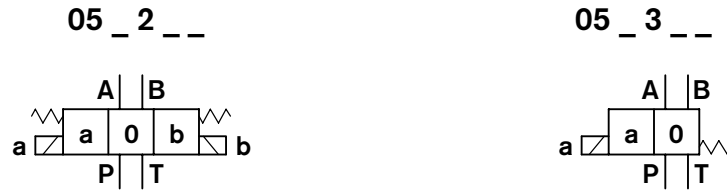


Principles of operation, cross section

The sandwich plate design directional valve elements B8_05... are very compact direct operated solenoid valves which control the start, the stop and the direction of the oil flow. These elements basically consist of a stackable housing (1) with a control spool (2), one or two solenoids (5), and one or two return springs (4). When energized, the force of the solenoid (5) pushes the control spool (2) from its neutral-central position "0" to the required end position "a" or "b", and the required flow from P to A (with B to T), or P to

B (with A to T) is achieved. Once the solenoid is de-energized, the return spring (4) pushes the spool thrust washer (3) back against the housing and the spool returns in its neutral-central position.

Each coil is fastened to the solenoid tube by a ring nut (6). A pin (7) allows to push the spool (2) in emergency conditions, when the solenoid cannot be energized, like in case of voltage shortage.

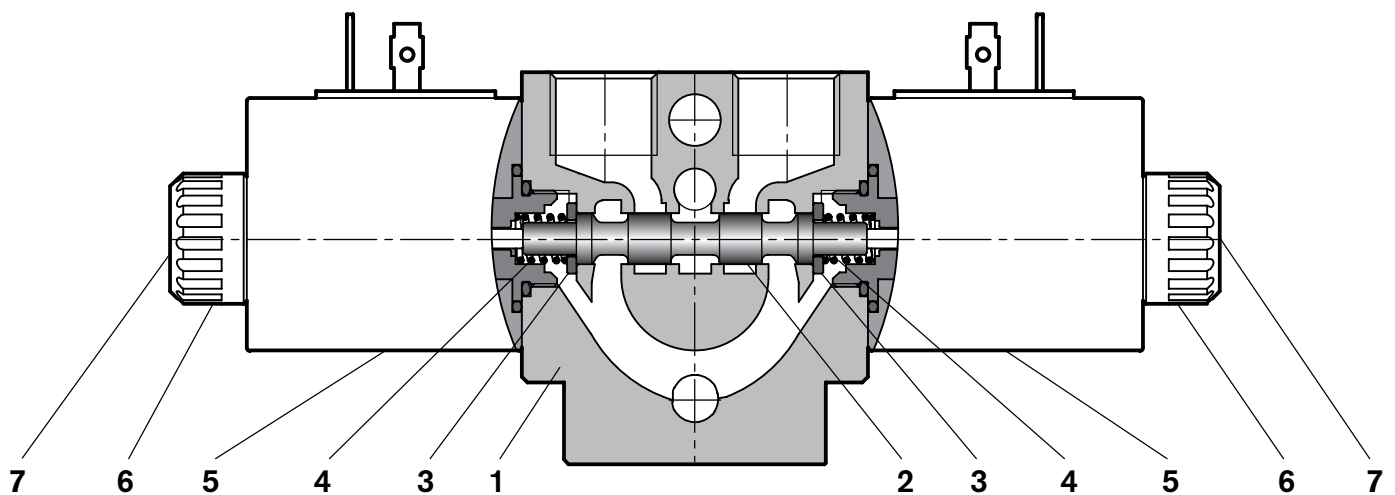

Technical Data (for applications with different specifications consult us)**General**

Valve element with 2 solenoids and plug-in pins EN 175301-803	kg (lbs)	1.2 (2.65)
Valve element with 1 solenoid and plug-in pins EN 175301-803	kg (lbs)	1.0 (2.20)
Ambient Temperature	°C (°F)	−20....+50 (−4....+122) [NBR seals]

Hydraulic

Maximum pressure at P, A and B ports	bar (PSI)	250 (3625)
Maximum dynamic pressure at T	bar (PSI)	150 (2176)
Maximum static pressure at T	bar (PSI)	210 (3045)
Maximum inlet flow	l/min (GPM)	15 (4)
Hydraulic fluid General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:		Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.
Fluid Temperature	°C (°F)	−20....+80 (−4....+176) [NBR seals]
Permissible degree of fluid contamination		ISO 4572: $\beta_{\geq 75} X=12...15$ ISO 4406: class 20/18/15 NAS 1638: class 9
Viscosity range	mm ² /s	5....420

Electrical


Voltage type		DC	
Voltage tolerance (nominal voltage)	%	−10 +10	
Duty		Continuous, with ambient temperature ≤ 50°C (122°F)	
Maximum coil temperature	°C (°F)	150 (302)	
Insulation class		H	
Compliance with		Low Voltage Directive LVD 73/23/EC (2006/95/EC), 2004/108/EC	
Coil weight with connection EN 175301-803	kg (lbs)	0.18 (0.4)	
Voltage	V	12	24
Voltage type		DC	DC
Power consumption	W	20	20
Current ¹⁾	A	1.72	0.86
Resistance ²⁾	Ω	6.97	27.88

1) Nominal 2) ± 7% at temperature 20°C [68°F]

	Voltage (V)	Connector type	Coil description	Marking	Coil Mat no.
= OB 01 = OB 02	12 DC	EN 175301-803 (Ex. DIN 43650)	C3101 12DC	12 DC	R933002776
= OB 07	12 DC	DEUTSCH DT 04-2P	C3107 12DC	12 DC	R933002778
= OC 01 = OC 02	24 DC	EN 175301-803 (Ex. DIN 43650)	C3101 24DC	24 DC	R933002777
= OC 07	24 DC	DEUTSCH DT 04-2P	C3107 24DC	24 DC	R933002779

Characteristic curves


Measured with hydraulic fluid ISO-VG32 at $45^\circ \pm 5^\circ \text{C}$ ($113^\circ \pm 9^\circ \text{F}$); ambient temperature 20°C (68°F).

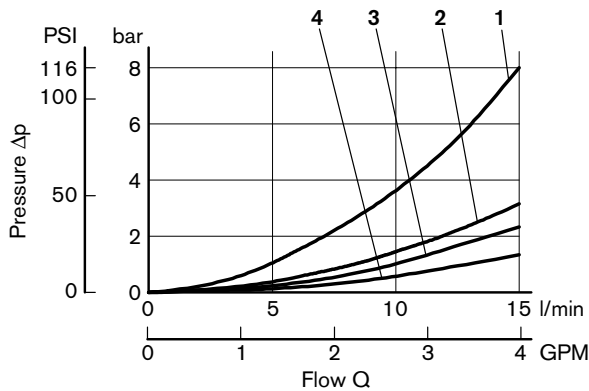

Spool Variants	Curve No.				
	P > T	P > A	P > B	A > T	B > T
A201	2	1	1	1	1
B201		3	3	2	2
C201	4	4	4	4	4
E201		3	3	4	4
K201		3	3	4	3
Y301		2	3	3	2
X301		3	3	3	3

Performances limits

Measured with the solenoids at their operating temperature, 10% under voltage and without pre-loading of the tank.

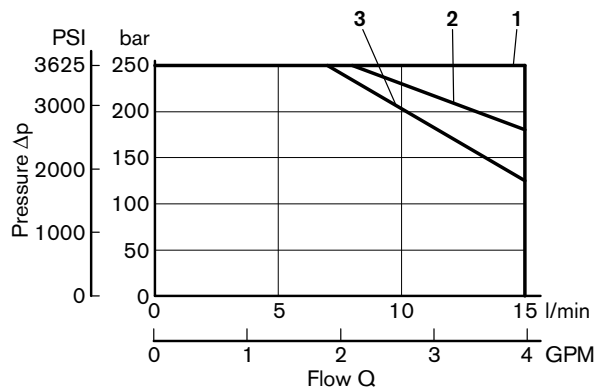


Spool Variants	Curve No.
A201	3
B201	2
C201	1
E201	1
K201	3
X301	1
Y301	2


The performance curves are measured with flow going across and coming back, like P > A and B > T, with symmetrical flow areas.

In case of special circuit connections, the performance limits can change.

Minimum flow for efficiency of LS control

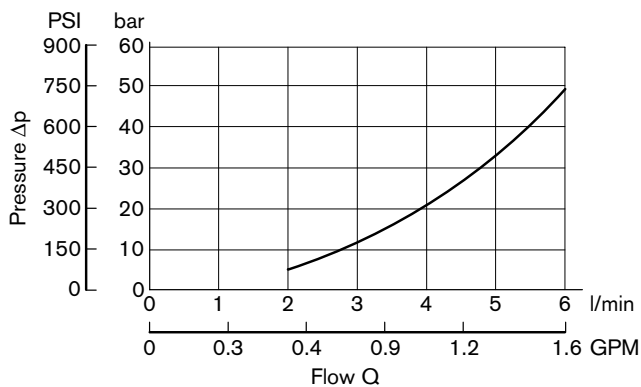


Lowest pressure setting curve for secondary valves

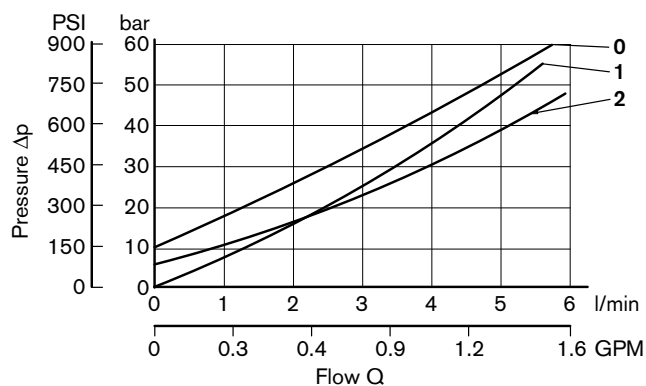

Secondary valve setting	Curve No.
50–210 bar (700–2950 PSI)	0
100–310 bar (1400–4500 PSI)	1
25–50 bar (350–700 PSI)	2





External Dimensions and Fittings

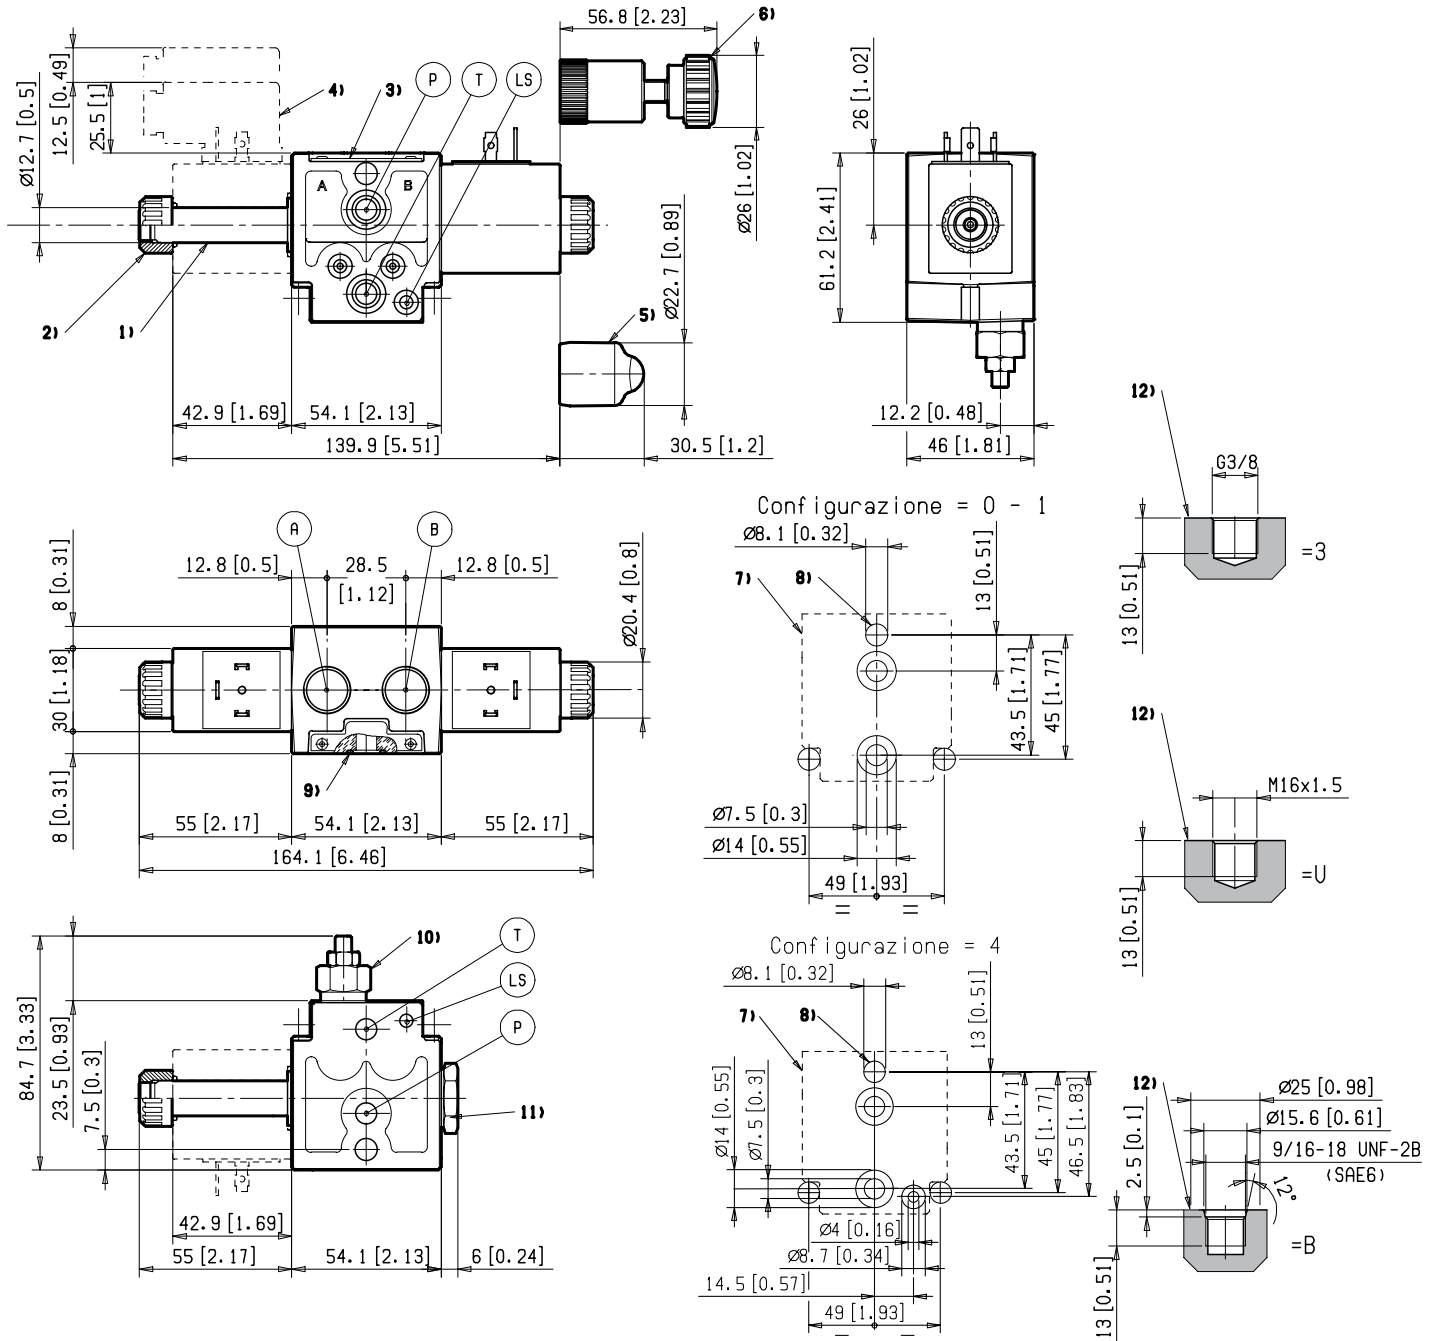

- 1 Solenoid tube hex 12.7 mm (0.5 inch). Torque 15–16 Nm (11–11.8 ft-lb).
- 2 Ring nut for coil locking [OD 20.5 mm (0.81 inch)]; torque 3–4 Nm (2.2–3 ft-lb).
- 3 Identification label.
- 4 Clearance needed for connector removal.
- 5 Optional push-button emergency, EP type, for spool opening: it is pressure stuck to the ring nut for coil locking. Mat no. R933000042.
- 6 Optional screw type emergency, EF type, for spool opening: it is screwed (torque 6–7 (4.4–5.2 ft-lb)) to the tube as replacement of the coil ring nut. Mat no. R933006377.

- 7 Flange specifications for coupling to ED intermediate elements.
- 8 One through hole for coupling of the ED Directional Valve Elements. Recommended tie rod M8 with strength class DIN 8.8. Torque 20–22 Nm (14.7–16.2 ft-lb).
- 9 O-Rings for P and T ports.
- 10 Space needed for secondary valve.
- 11 Plug for 2 positions versions (4/2); hex 22 mm, torque 20–22 Nm (14.7–16.2 ft-lb).
- 12 A and B ports.

Electric connection (or connections, in case of two solenoids)
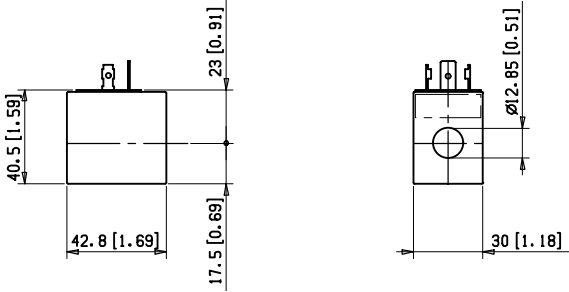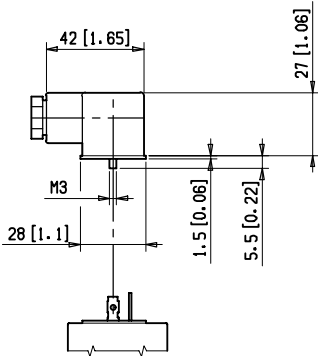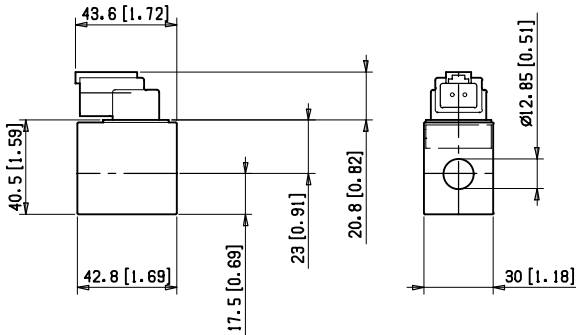
<div data-bbox="120 491 180 520">= 00</div> <div data-bbox="207 226 764 279"><p>Without coils, but with ring nut and O-Rings for coil fitting (solution recommended for flexible stock handling)</p></div> <div data-bbox="412 443 558 558"></div>	<div data-bbox="779 491 839 520">= 01</div> <div data-bbox="948 226 1430 279"><p>With coils having plug-in pins EN 175301-803, without connectors</p></div> <div data-bbox="906 363 1471 653"></div>						
<div data-bbox="120 1121 180 1150">= 02</div> <div data-bbox="207 798 740 947"><p>With coils and with connectors non-assembled, type EN 175301-803. Protection class: IP 65 when connector with seal is properly screwed down, and cable clamp is correctly tightened.</p></div> <div data-bbox="207 970 384 995"><p>182-09: Standard</p></div> <div data-bbox="328 995 643 1348"></div> <div data-bbox="207 1377 607 1472"><table><thead><tr><th>Material No.</th><th>Description</th></tr></thead><tbody><tr><td>R933002885</td><td>182-09 GRAY</td></tr><tr><td>R933002889</td><td>182-09 BLACK</td></tr></tbody></table></div>	Material No.	Description	R933002885	182-09 GRAY	R933002889	182-09 BLACK	<div data-bbox="779 1121 839 1150">= 07</div> <div data-bbox="932 798 1446 913"><p>With coils having DEUTSCH DT 04-2P connector, and with bi-directional diode. Protection class: IP 69 K with female connector properly fitted (see drawing).</p></div> <div data-bbox="899 961 1471 1293"></div>
Material No.	Description						
R933002885	182-09 GRAY						
R933002889	182-09 BLACK						

Bosch Rexroth Corp.
Hydraulics
2315 City Line Road
Bethlehem, PA 18017-2131
USA
Telephone (610) 694-8300
Facsimile (610) 694-8467
www.boschrexroth-us.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Corporation. Without their consent it may not be reproduced or given to third parties.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.