





**SOLENOID OPERATED VALVES**  
**POPPET 2-WAY DOUBLE LOCK NORMALLY OPEN**  
**CARTRIDGE STYLE**





**VEI-8A-2T-09-NA-S**

**OD.15.32.17 - Y - 00**

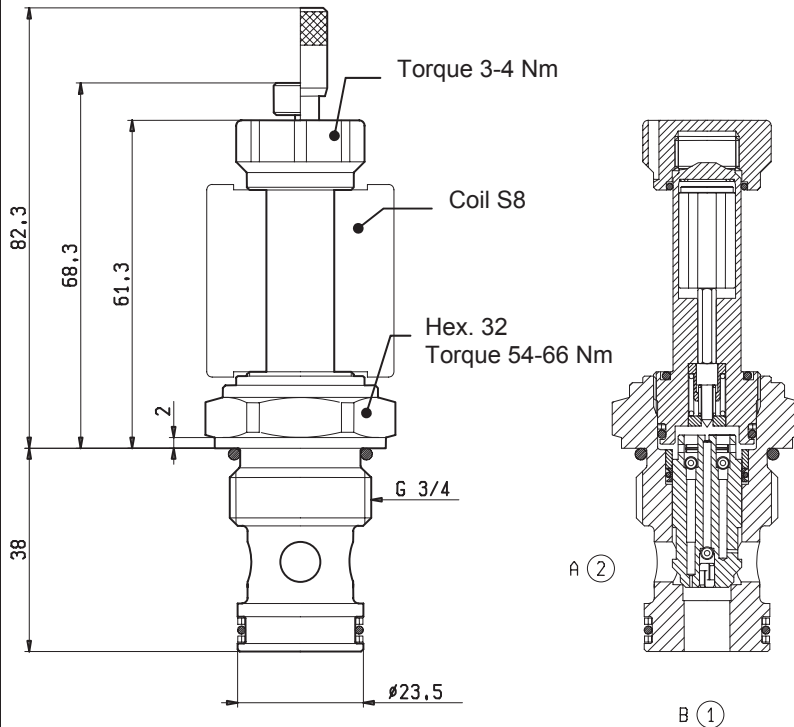

**TECHNICAL DATA**


|                                      |                |       |
|--------------------------------------|----------------|-------|
| Maximum Operating Pressure           | 350            | bar   |
| Rated Flow                           | 70             | l/min |
| Cavity - Tooling (017-E)             | page 7.01.100  |       |
| Weight                               | 0.220          | kg    |
| Fluids - Temperatures                | page 7.01.040  |       |
| Testing Conditions - Seals           | page 7.01.040  |       |
| Internal Leakage                     | page 7.01.040  |       |
| Filtration : 25 µm nominal or better | page 7.01.050  |       |
| Minimum Voltage Required             | 90% of nominal |       |
| Coils must be ordered separately     | page 1.71.050  |       |
| Mounting Position                    | unrestricted   |       |

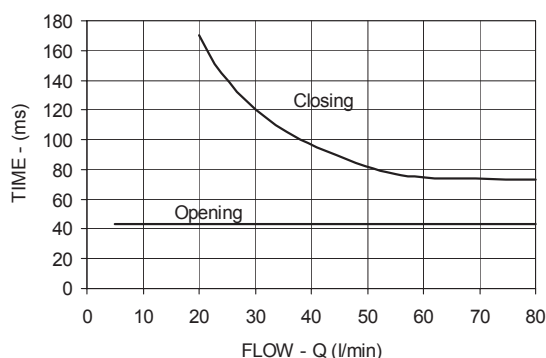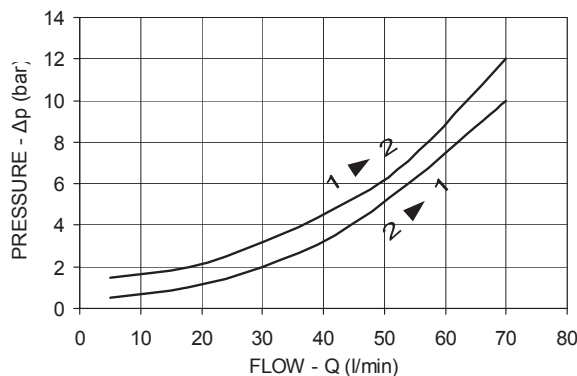

**Y**

**ORDERING OPTIONS**

**17** Standard



**18** Push Style Manual Override



**19** Push and Twist Style Manual Override

