


“V” TYPE COIL

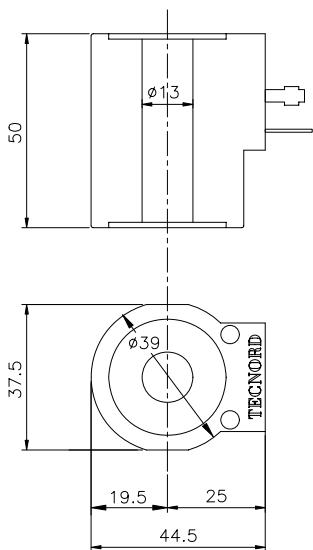

DESCRIPTION

1/2 inch (13 mm) I.D. Coil.
Color identification: black

FEATURES


One piece encapsulated design that is:

- Immersion proof
- No external metal shell
- Internal arc suppression diode available on request


COIL SPECIFICATION

Wattage	24 Watts Nominal
Duty Rating	Continuous Duty ±10% rated voltage at 120°F (49°C) ambient
Min Current for Actuation	80% of rated current at room temperature
Magnet Wire Class	H (200°C)
Heat insulation Class	H (180°C)
Ambient Temperature Range	-30° to 60°C
Protection degree	Up to IP 65 (with connector and suitable seals)
Encapsulation Material	Glass filled polyester, resistant to moisture, caustic solutions, fungus and vibration


VDL




VHC



VDI



VJT



ORDERING INFORMATION

V	-	-	
TERMINATIONS			
Double Lead	DL	12	
DIN 43650 (Hirschmann)	HC	24	
AMP Junior Timer - Integral	JT	22	
Deutsch - Integral DT04-2P	DI		

VOLTAGE
12 VDC / 2.03 A
24 VDC / 1.01 A
220 VAC / rectified 0.06 A
<i>without internal rectifier (for HC termination only)</i>
<i>supply voltage must be externally rectified</i>

Approximate Coil Weight: .56 lbs (.25 kg)

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526
mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512
mail: tecnord@tecnord.com • www.tecnord.com