

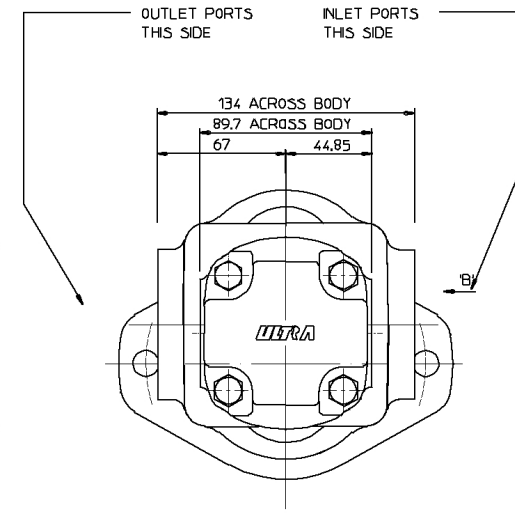
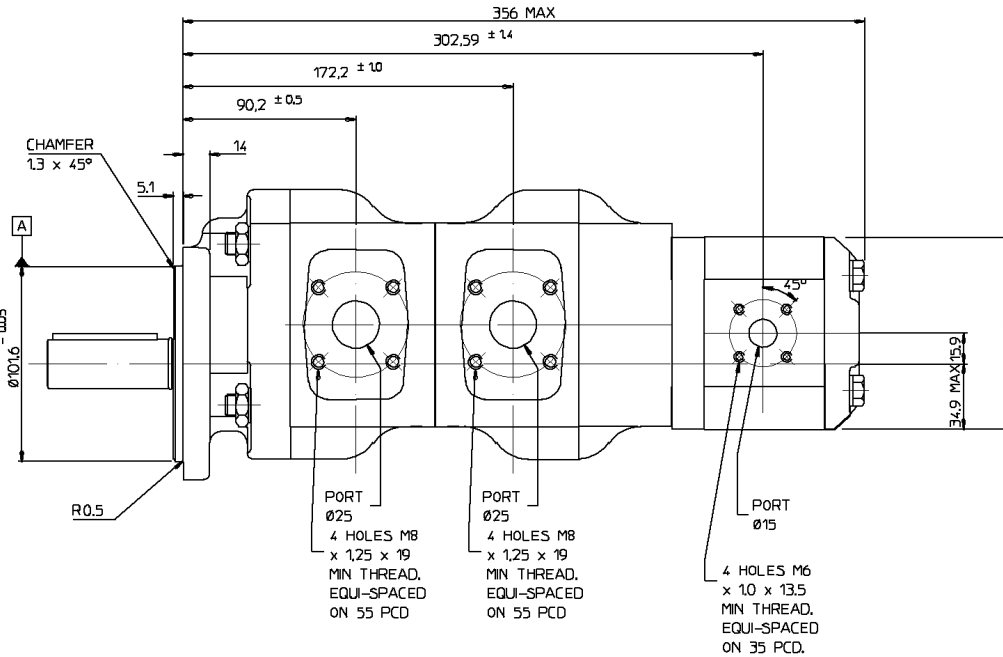


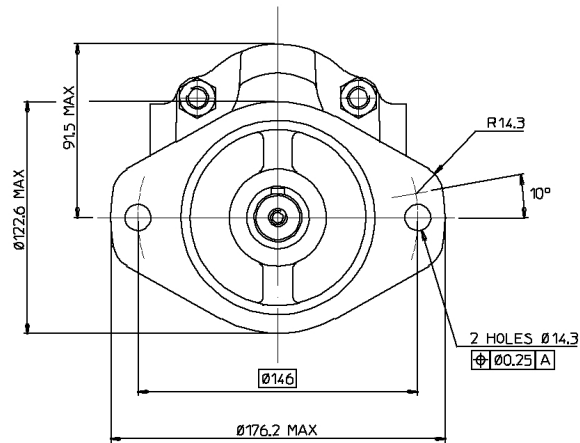

PUMP DATA			
PUMP TYPE	FRONT PUMP	CENTRE PUMP	REAR PUMP
THEORETICAL DISPLACEMENT	26.0 cc/rev (1.59 cu in/rev)	26.0 cc/rev (1.59 cu in/rev)	14.0 cc/rev (0.85 cu in/rev)
MAXIMUM CONTINUOUS PRESSURE P1	250 bar (3625 psi)	250 bar (3625 psi)	250 bar (3625 psi)
MAXIMUM SPEED AT PRESSURE P1	3000 rev/min		
MINIMUM SPEED AT PRESSURE P1	500 rev/min		
ROTATION WHEN VIEWED ON END OF DRIVESHAFT	ANTI - CLOCKWISE		
APPROX WEIGHT	kg (lb)		
OPERATING TEMPERATURE RANGE	CONTINUOUS 0°C TO 80°C COLD START -20°C MAX INTERMITTENT 100°C		
SHAFT SEAL TYPE	SINGLE NITRILE		

FOR OPERATING CONDITIONS OUTSIDE THOSE STATED PLEASE CONSULT
ULTRA HYDRAULICS LIMITED TECHNICAL SALES DEPARTMENT.
WITH EXCEPTION OF DRIVESHAFT, FLANGE SPIGOT AND MOUNTING FACE, PLUS
AREAS AROUND PORTS, ALL SURFACES ARE PAINTED WITH BLACK SUNCORITE 528.

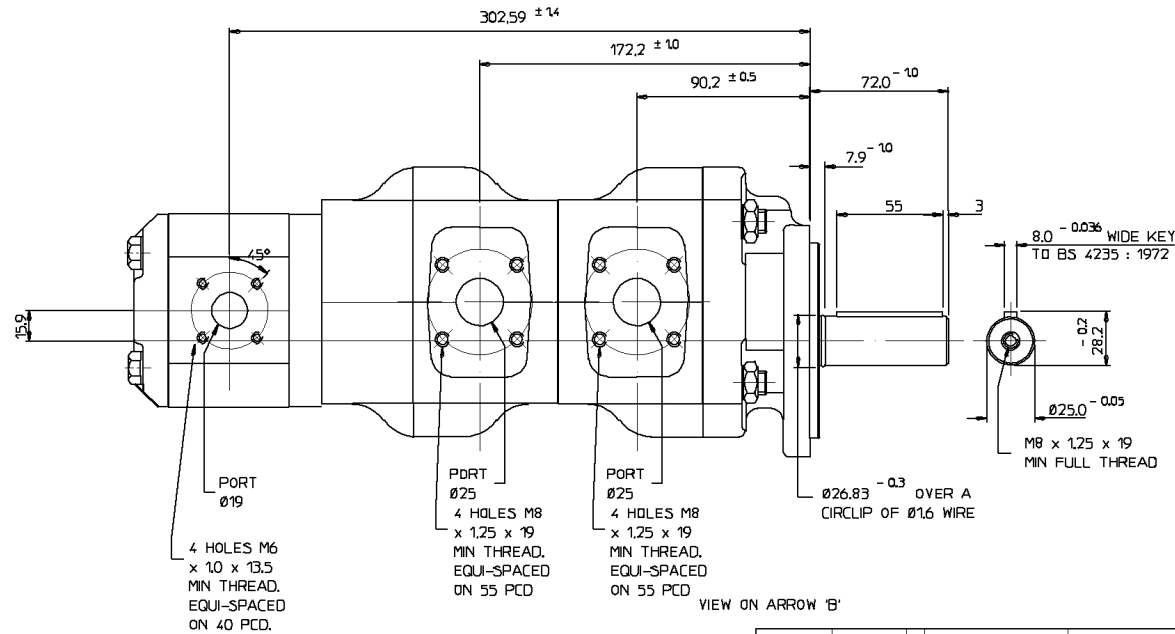

USED ON	PRODUCED
DATE	1
ISSUED ON	5781
DRAWN	AM
CHECKED	AM
ENG APP	AM
PROD APP	AM

Part No.	8 3 0 3 0	THIRD ANGLE PROJECTION
TITLE	2PRO26F5F5B1B1-250-AP2S1N 2PRO26F5F5B1B1-250 1PX140F2F4B1B1-250-MA	
SIZE	A0	