


SERIE: 30901-1 12 Volt

SERIE: 30903-1 24 Volt

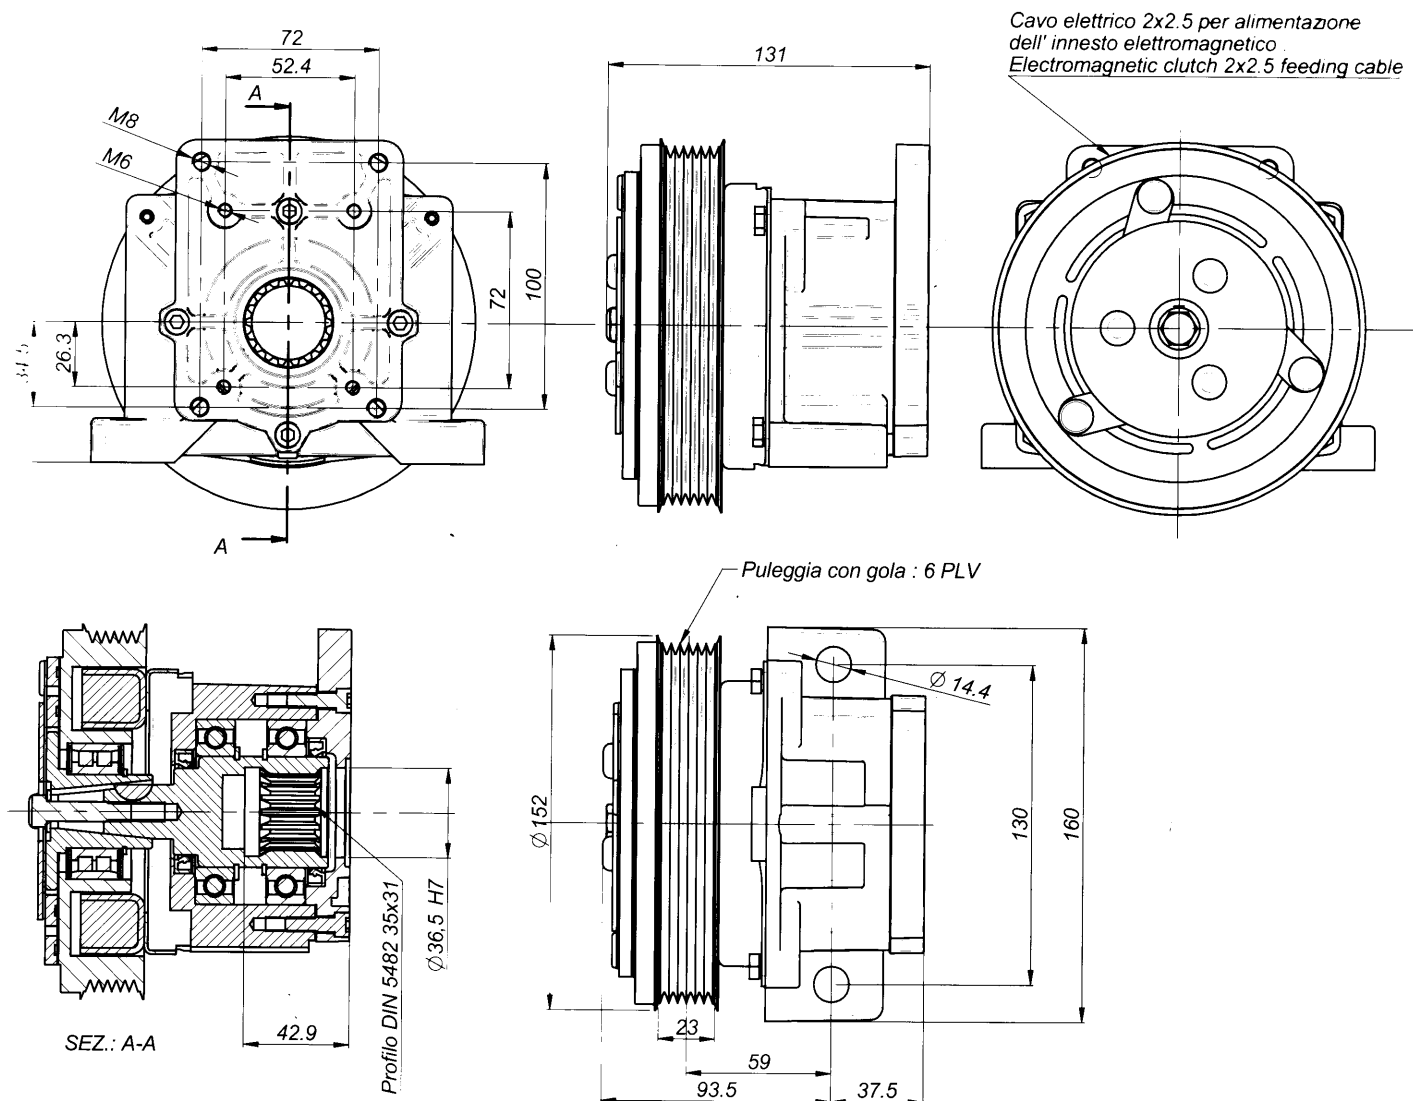

Nominal torque	7,8 daNm		Connection time		25 m/sec		
Static torque	12,5 daNm		Disconnection time		40 m/sec		
Dynamic torque	8,5 daNm	at 500 rpm	Minimum time between two connection		20 sec		
	7,0 daNm	at 1000 rpm					
	4,2 daNm	at 1500 rpm					
	3,5 daNm	at 2000 rpm					
	2,7 daNm	at 2500 rpm	Max speed		5000 rpm		
	2,5 daNm	at 3000 rpm	Weight		5,5 Kg		
Electric absorption		Resistance (Ω)		Current (A)		Power (W)	
		20° C	120° C	20° C	120° C	20° C	120° C
12 V DC		4,00	5,60	3,33	2,00	40,00	24,00
24 V DC		20,00	28,00	1,26	0,77	30,30	18,18
All technical data are at 20°C / at 120 °C the performance are less 20% All electromagneteic clutches are reversible.							