


PUMP DATA		
DISPLACEMENT	19,0	ccm
MAX. PRESSURE	275	bar
SPEED RATE 500 TO	3000	min¯1
MAX. INPUT SHAFT TORQUE	218	Nm
ROTATION	ANTI CLOCKWISE	

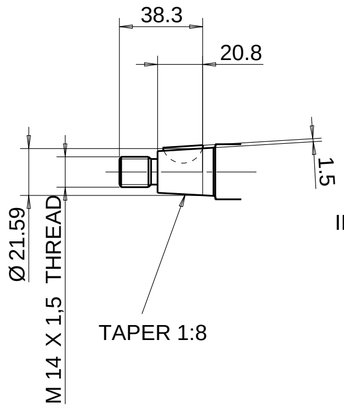


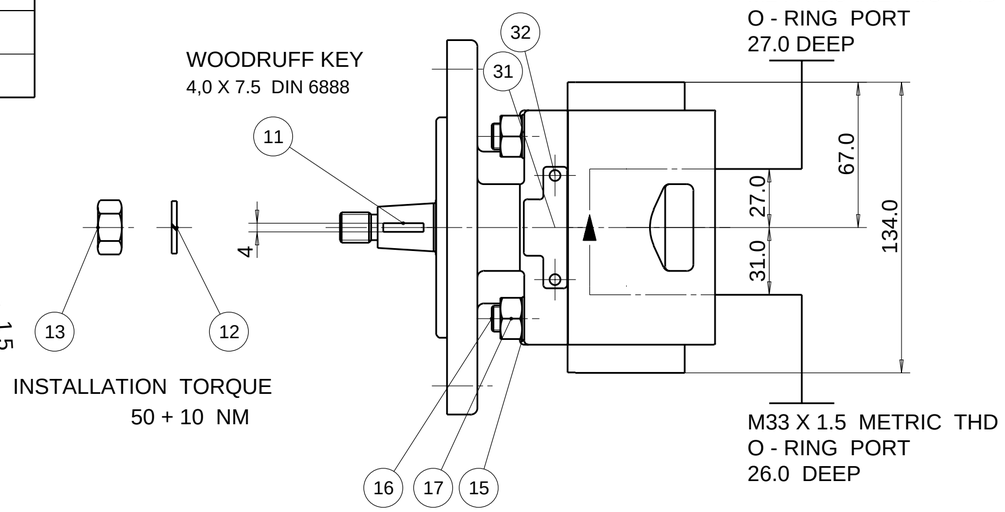


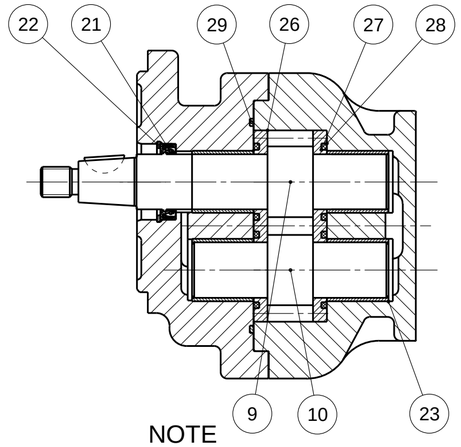

NOTE

1. FOR ASSEMBLY INSTRUCTIONS SEE DWG. NO. "620-B1" "PGP620 PUMP ASSEMBLY INSTRUCTIONS".
2. NAMEPLATE LOCATION MAY VARY DUE TO DESIGN CRITERIA OR MANUFACTURING LOCATION. STICKER OPTIONAL FOR #31 & #32

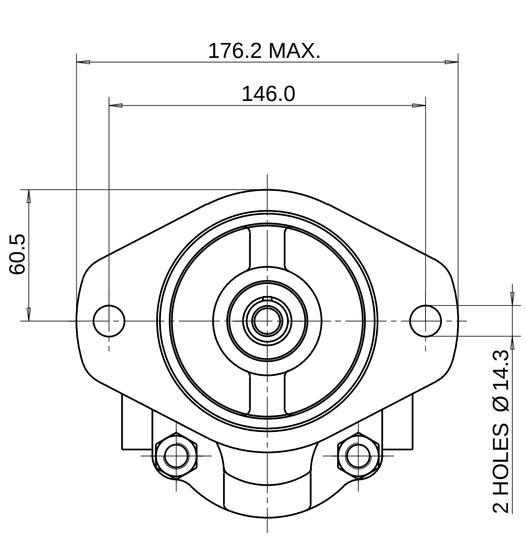

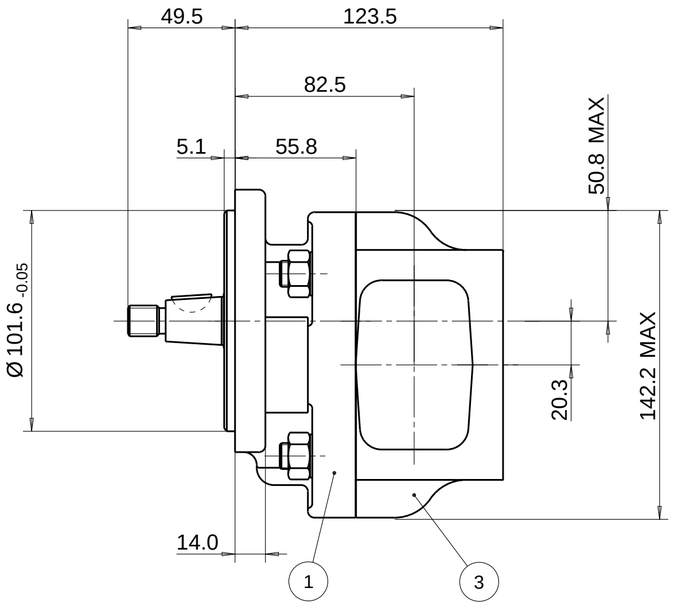

ITEM	PART NO	REQD		ITEM	PART NO	REQD	
28	8682-015-00Q	2	SEAL. ELEM.	36			
27	8682-016-00L	2	SEAL. ENERG.	35			
26	391 2185 150	2	BAL. PLATE	34			
25				33			
24				32	391 1432 004	2	SCREW. DR.
23	391 0482 237	4	BUSH	31	391 2183 227	1	NAMEPLATE
22	9211-530-006	1	CIRCLIP	30			
21	8682-019-00Z	1	SEAL. LIP	29	9312-641-004	1	SEAL. SECT.

ITEM	PART NO	REQ'D	DESCRIPTION
20			
19			
18			
17	391 1451 149	4	M12 NUT
16	8682-007-00M	4	M12 SCREW
15	9222-575-009	4	WASHER
14			
13	391 1451 242	1	NUT
12	391 3782 260	1	WASHER
11	391 1781 115	1	KEY
10	702 2719 000	1	DRIVEN GEAR
9	77020:4122592	1	DRIVE GEAR
8			
7			
6			
5			
4			
3	702 8919 002	1	BODY
2			
1	2PRF02S1R	1	FLANGE

WITH EXCEPTION OF DRIVE SHAFT, FLANGE SPIGOT AND MTG. FACE PLUS AREAS AROUND PORTS, ALL SURFACES ARE PAINTED BLACK ZSS - A1 (AA-O-05.2)

THIRD ANGLE PROJECTION

EXP NO.

FIRST USED
12 - 10 - 622

702 9110 072

SYM.	REVISIONS

THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND PROPRIETARY TO PARKER-HANNIFIN CORPORATION ("PARKER"). THIS DOCUMENT IS FURNISHED ON THE UNTERSTANDING THAT THE DOCUMENT AND THE INFORMATION IT CONTAINS WILL NOT BE COPIED OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN CONDUCTING BUSINESS WITH PARKER, AND WILL BE RETURNED AND ALL FURTHER USE DISCONTINUED UPON REQUEST BY PARKER. ALL RIGHTS RESERVED.

PGP620A0190AT1*H3NB1B1H7H5

Parker Pump & Motor Division Chemnitz

MATERIAL

H.E.-STD:

ADM CTR P

REV DTE 000000

WT 12.1 kg

DIMENSIONS ARE MM

DR.BY	DATE	CH.BY	DATE	SCALE
TG	16OCT12	JS	16OCT12	1/2

702 9110 072

© 2012 Parker Hannifin Corporation