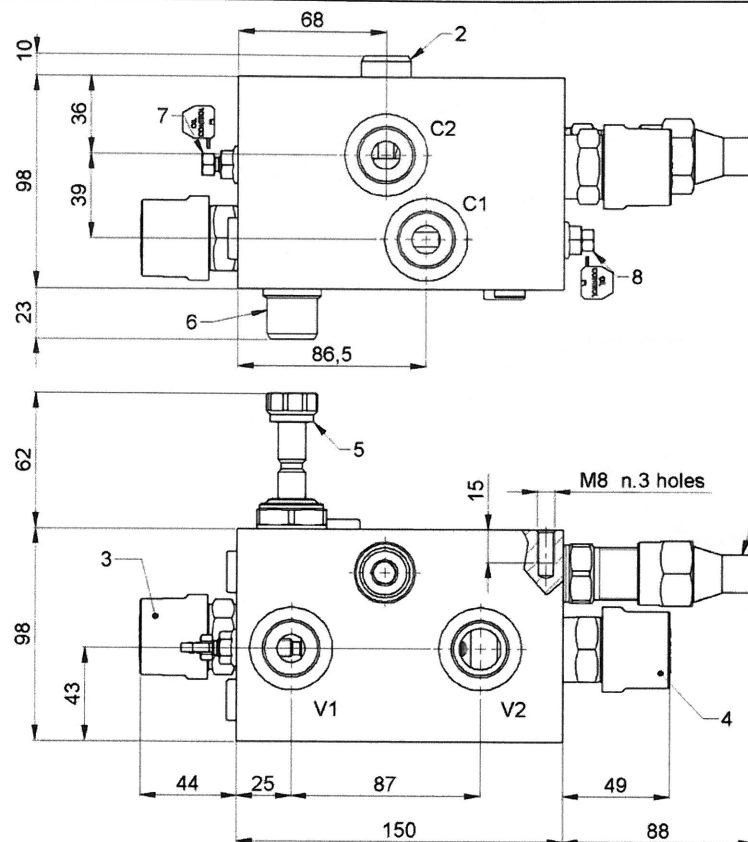


Operating pressure: up to 210 bar
Max. flow: 100 l/min

Pressure setting
Valve 1 : 240 bar (Q= 5 l/min)
Valve 3 : 380 (0/+10) bar cracking pressure
Valve 4 : 260 (0/+10) bar cracking pressure

Pressure increase
Valve 1 : 27 bar / turn
Valve 3 : 110 bar / turn
Valve 4 : 110 bar / turn

Adj.press.range bar
Valve 1 : 80 - 250 bar
Valve 3 : 100 - 380 bar
Valve 4 : 100 - 350 bar

Ports size
V1-V2-C1-C2 = G 3/4 ISO 1179-1

Pilot ratio
Valve 3 = 4:1
Valve 4 = 4:1

Manifold: Anodized aluminium

Special for: Palfinger cod. EV2491

Weight: 5,000 Kg

Note: Aluminium bodies are often strong enough for operating pressure exceeding 210 bar (3045 psi), depending from the fatigue life expected in the specific application.

For dimensions without tolerance, consider ± 0.5 mm

All dimensions : mm

Denominazione / Denomination		VBSO-DE-CR-N-VS-E-34-35D			
Specifiche Specifications	-			Ufficio Tecnico Technical Dep. DC-MA/ECM	
	-			Gerarchia Prodotto Product Hierarchy 876213611	
	-			Kit guarniz. Seal kit -	
	-			Modifiche Changes	
Massa / Mass (kg)	5,000	Cliente e codice articolo Customer and article code	PALFINGER cod. EV2491		
Richiesta / Request	UT11950	Num. schema idraulico / Hydraulic scheme no.	-	Modifiche Changes	
Tipo cavità Cavity type	 A3	Studio di riferimento / Reference study	-	Sostituisci il Replaces	05446303043500C
Disegno di proprietà BOSCH-REXROTH OIL CONTROL S.p.A. tutelato ai termini di legge. E' vietata la riproduzione e la diffusione senza autorizz.		Disegnato / Designed by	Cirillo	Data / Date	30/08/13
This drawing is a property of BOSCH-REXROTH OIL CONTROL S.p.A. protected according to the laws. Unauthorized reproduction and distribution is strictly prohibited.		Verificato / Checked by	Ortiz	Scala / Scale	1:2
		Direttore del file Cad / Cad file directory K:\Design\Cad 3D\Ingombri\05446303043500D		Codice Code	05446303043500D
				Materiale material number	R930007085